



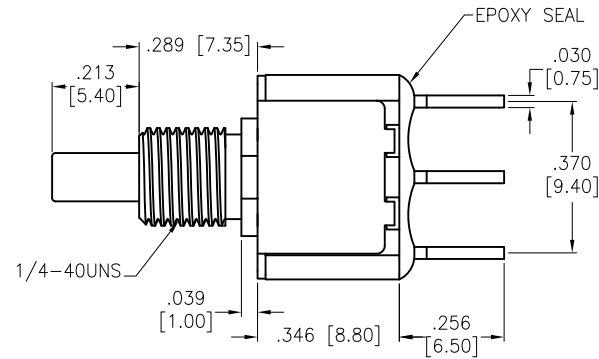


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	2/8/21	





HEX NUT

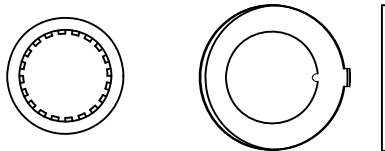

LOCK WASHER

ANTI ROTATIONAL
WASHER

INCLUDED HARDWARE

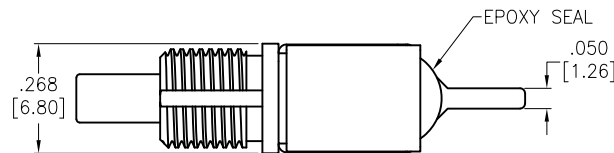

CIRCUIT DIAGRAM
(SPDT) MOMENTARY

SPECIFICATIONS:

Material:

Movable Contact: Copper Alloy, Silver Plated

Terminal: Copper Alloy, Silver Plated

Electrical:

Voltage rating: 120VAC or 38VDC

Current rating: 1 Amps

Contact resistance: 10 mΩ max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 1,500V RMS @Sea level

Temperature Rating:

Operating temperature: -30°C to +85°C

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLES

.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE	
DRAWN	LH	2/8/21	
CHECKED	AC	2/8/21	
APPROVED			

ADAM
TECH

909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

TITLE SNAP-ACTING PUSHBUTTON SWITCH, SPDT, ON-MOMENTARY, SILVER PLATED, PCB TYPE			
SIZE X	PART NO. SW-PB8-AB00A2QE-1	REV. -	
REF: S00198T	SCALE: NTS	SHEET 1 OF 1	