




APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/9/21	
A		UPDATE SPEC.	6/21/21	WX/RC

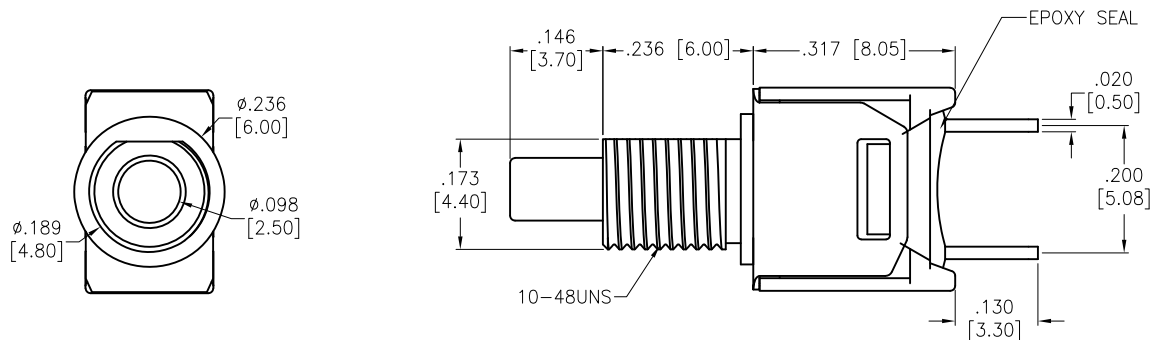

SPECIFICATIONS:

Material:

Movable Contact: Copper Alloy, Silver Plated

Terminal: Copper Alloy, Silver Plated

Electrical:

Rating: 1 Amps with resistive load @ 125VAC or 28VDC

Contact resistance: 20 mΩ max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 1,500V RMS @Sea level

Temperature Rating:

Operating temperature: -30°C to $+85^{\circ}\text{C}$

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X $\pm .10$ $\phi.X$ $\pm .10$
.XX $\pm .020$ $\phi.XX$ $\pm .015$
.XXX $\pm .015$ $\phi.XXX$ $\pm .010$

APPROVALS DATE

DRAWN	WX	3/9/21
CHECKED	AC	3/9/21
APPROVED		

ADAM
TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
SUB-MINIATURE PUSHBUTTON SWITCH,
OFF-MOMENTARY, SPST, SILVER PLATED, PCBTYPE

SIZE X	PART NO. SW-PB9-BA00BQE-5	REV. A
REF: S00198T	SCALE: NTS	SHEET 1 OF 1