

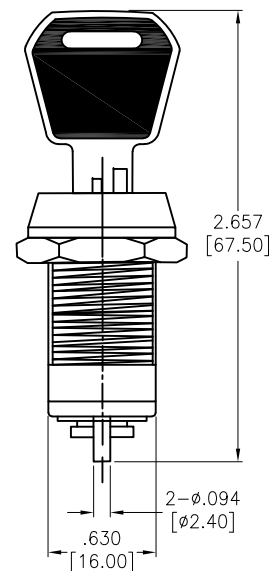

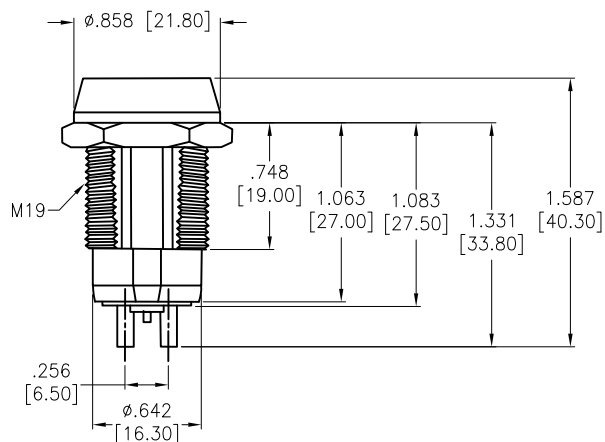


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/6/20	
A		UPDATE DRAWING.	5/11/21	JJ/RC
B		ADDED SPEC.	8/31/21	WX/RC
C		UPDATE SPEC.	5/27/22	WX/RC



FUNCTION

SP, ON-OFF

SPECIFICATIONS:

Material:

Body: Steel, Polished Chrome, Silver plated

Electrical:

The rated load: 125 VAC, 4A

250 VAC, 2A

28 VDC, 4A

Contact resistance: 20 mΩ max

Insulation resistance: 100 mΩ min (500VDC)

Dielectric withstanding voltage: 1000 VAC for 1 minute

Mechanical life: ≥10000 Cycles

Temperature Rating:

-20°C to +85°C

Environmental:

Lead free, RoHS compliant



ADAM-P/N

SPEC.

SW-R-K10-A

Key pulled on both positions. Note: this would be our standard

SW-R-K10-B

Key pulled on 1 position

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ±.10	Ø.X ±.10
.XX ±.020	Ø.XX ±.015
.XXX ±.015	Ø.XXX ±.010

DRAWN

OW

11/6/20

CHECKED

AC

11/6/20

APPROVED

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM
TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE

SWITCH, KEY LOCK, 19MM, ON-OFF
PANEL MOUNT, SOLDER TERMINAL

SIZE

X

PART NO.

SW-R-K10-X

REV.

C

REF: S00206C

SCALE: NTS

SHEET 1 OF 1