


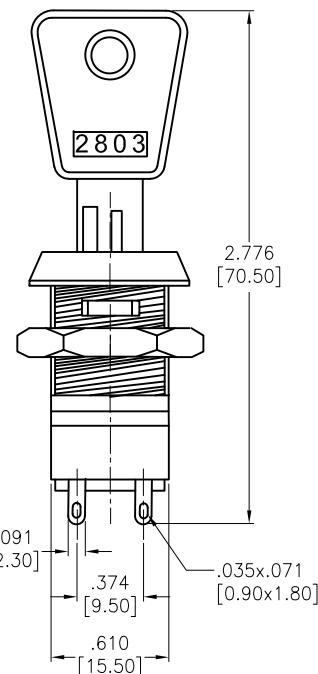


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/10/21	

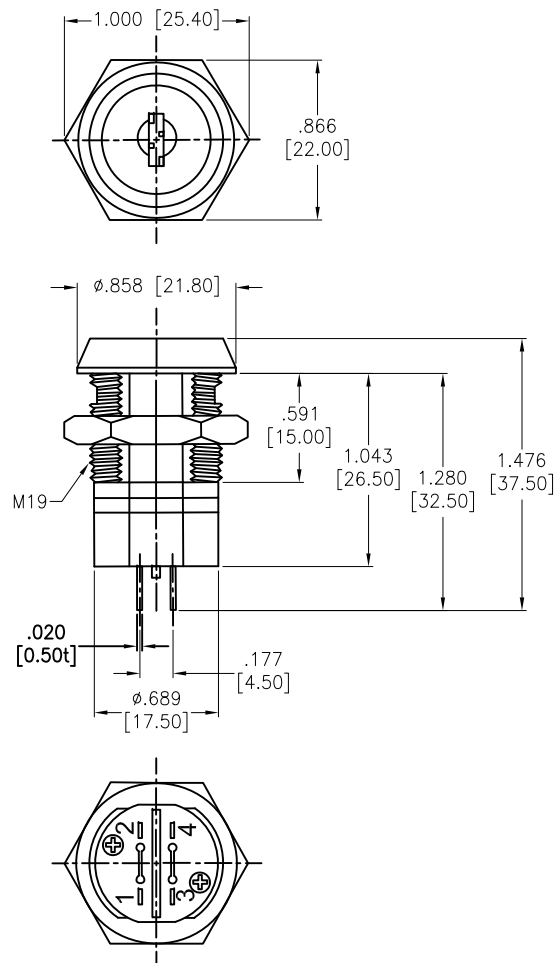

SW-R-K11B-X

Function
A Key pulled on both positions. Note: this would be our standard
B Key pulled on 1 position

SPECIFICATIONS:

Material:

Body: Steel, Polished Chrome

Electrical:

The rated load: 125 VAC, 4A

250 VAC, 2A

28 VDC, 4A

Contact resistance: 20 mΩ max

Insulation resistance: 100 MΩ min (500VDC)

Dielectric withstanding voltage: 1000 VAC for 1 minute

Mechanical life: ≥10000 Cycles

Temperature Rating:

-20°C to +85°C

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ±.10	Ø.X ±.10
.XX ±.020	Ø.XX ±.015
.XXX ±.015	Ø.XXX ±.010

DRAWN	WX	8/10/21
CHECKED	RC	8/10/21
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECH

ADAM
TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
SWITCH, KEY LOCK, 19MM, 4P, SPDT, ON-ON
PANEL MOUNT, SOLDER TERMINAL

SIZE X	PART NO. SW-R-K11B-X	REV. -
REF: S00206C	SCALE: NTS	SHEET 1 OF 1