


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/15/20	
A		UPDATE DRAWING	5/12/21	JJ/RC
B		UPDATE DIM.	6/9/21	JJ/RC
C		ADDED SPEC.	8/31/21	WX/RC
D		UPDATE SPEC.	5/27/22	WX/MC

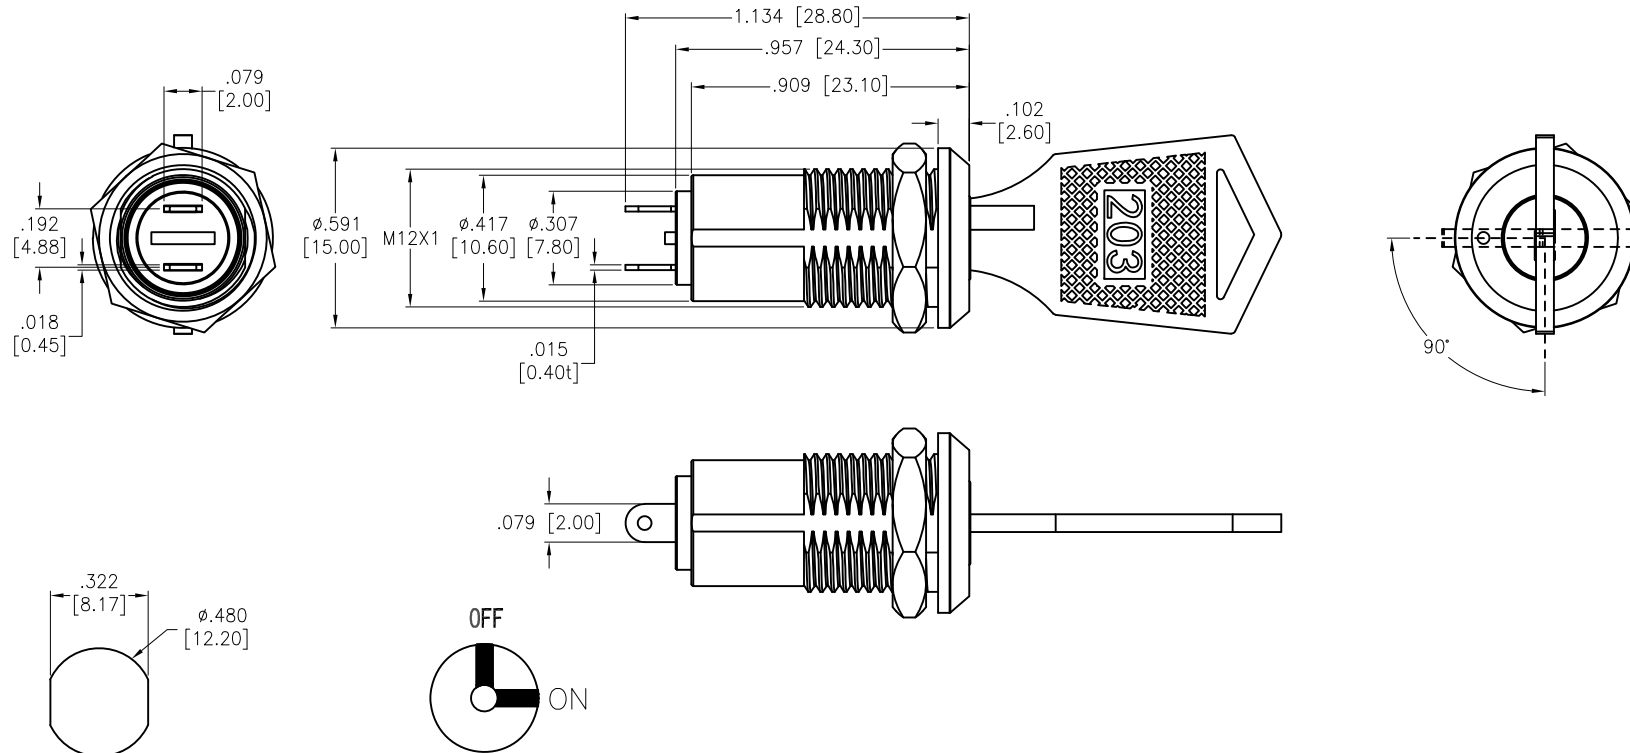

RECOMMENDED PANEL CUT

KEY FUNCTION

FUNCTION

SPST, ON-OFF

SPECIFICATIONS:

Material:

Body: Steel, Polished Chrome, Silver plated

Electrical:

The rated load: 250 VAC, 0.5A
24 VDC, 0.5A

Contact resistance: 35 mΩ max

Insulation resistance: 1000 mΩ min (500VDC)

Dielectric withstanding voltage: 1500 VAC for 1 minute

Endurance: ≥10000 Cycles

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant



ADAM-P/N	SPEC.
SW-R-K4-A	Key pulled on both positions. Note: this would be our standard
SW-R-K4-B	Key pulled on 1 position

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ±.10	Ø.X ±.10
.XX ±.020	Ø.XX ±.015
.XXX ±.015	Ø.XXX ±.010

DRAWN	OW	10/15/20
CHECKED	AC	10/15/20
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECH

ADAM
TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE SWITCH, KEY LOCK, 12MM, SPST, ON-OFF
PANEL MOUNT, SOLDER TERMINAL

SIZE X	PART NO. SW-R-K4-X	REV. D
-----------	-----------------------	-----------

REF: S00206C SCALE: NTS SHEET 1 OF 1