

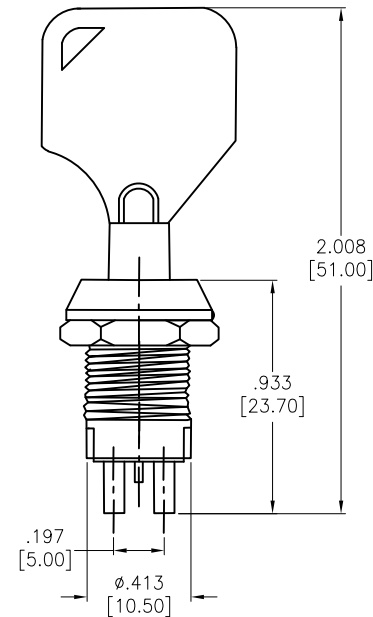


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/10/20	
A		UPDATE DRAWING	5/12/21	JJ/RC
B		ADDED SEPC.	8/31/21	WX/RC
C		ADDED SEPC.	6/15/22	WX/MC

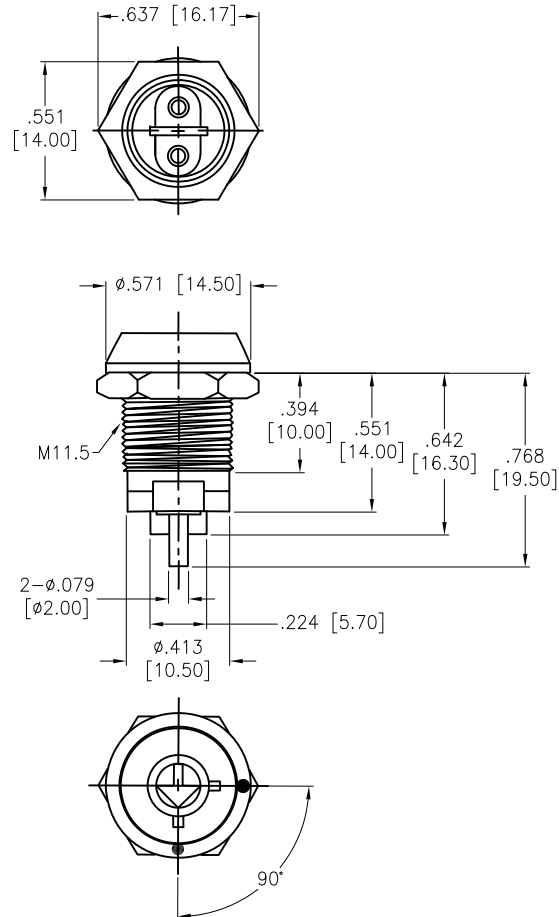

RECOMMENDED PANEL CUT

FUNCTION
SPST, ON-OFF

SPECIFICATIONS:

Material:

Body: Steel, Polished Chrome, Silver plated

Electrical:

The rated load: 125 VAC, 1A

250 VAC, 0.5A

Contact resistance: 100 mΩ max

Insulation resistance: 100 mΩ min (500VDC)

Dielectric withstanding voltage: 500 VAC for 1 minute

Mechanical life: 5000 times max

Temperature Rating:

-25°C to +85°C

Environmental:

Lead free, RoHS compliant



ADAM-P/N	SPEC.
SW-R-K5-A	Key pulled on both positions. Note: this would be our standard
SW-R-K5-B	Key pulled on 1 position

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ±.10	Ø.X ±.10
.XX ±.020	Ø.XX ±.015
.XXX ±.015	Ø.XXX ±.010

DRAWN	OW	11/10/20
CHECKED	AC	11/10/20
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECH

ADAM
TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
SWITCH, KEY LOCK, SPST, ON-OFF
PANEL MOUNT, SOLDER TERMINAL

SIZE X	PART NO. SW-R-K5-X	REV. C
-----------	-----------------------	-----------

REF: S00206C	SCALE: NTS	SHEET 1 OF 1
--------------	------------	--------------