


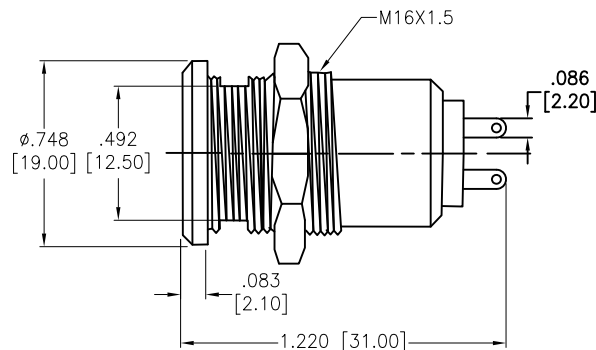




APPROVED: _____
 DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/5/20	
A		UPDATE DRAWING	5/12/21	JJ/RC

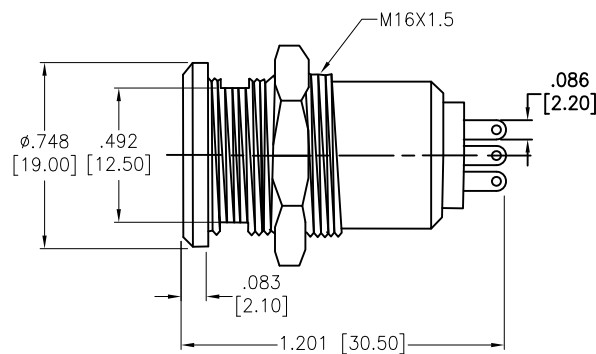

SPST (K7A)
ON-OFF



SPDT (K7B)
ON-OFF-ON



RECOMMENDED PANEL CUT

FUNCTION	
K7A	ON-OFF
K7B	OFF-ON-ON

SPEC.	
A	Key pulled on both positions. Note: this would be our standard
B	Key pulled on 1 position

SPECIFICATIONS:

Material:

Body: Steel, Polished Chrome

Electrical:

The rated load: 250 VAC, 2A
28 VDC, 4A

Contact resistance: 35 mΩ max

Insulation resistance: 1000 MΩ min (500VDC)

Dielectric withstanding voltage: 1500 VAC for 1 minute

Electrical life: ≥10000 Cycles

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	±.10	Ø.X	±.10
.XX	±.020	Ø.XX	±.015
.XXX	±.015	Ø.XXX	±.010

DRAWN	OW	11/5/20
CHECKED	AC	11/5/20
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECH

**ADAM
TECH**

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
SWITCH, KEY LOCK, 16MM, ON-OFF / ON-OFF-ON,
OFF-ON-ON, PANEL MOUNT, SOLDER TERMINAL

SIZE X	PART NO. SW-R-K7X-X	REV. A
REF: S00206C	SCALE: NTS	SHEET 1 OF 1