


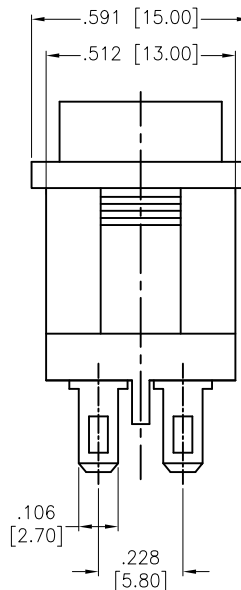
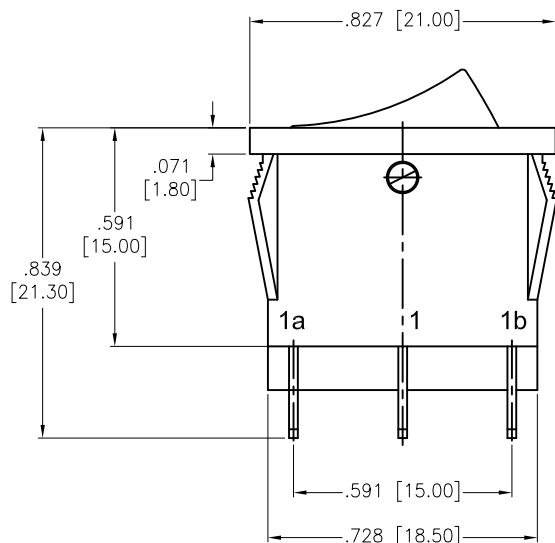



APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/16/20	
A		UPDATE DRAWING	3/30/23	LH/RZ

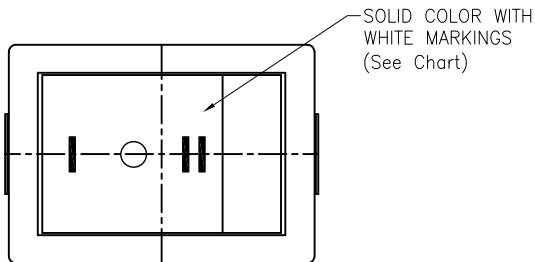

CIRCUIT DIAGRAM
(DPDT) ON-OFF-ON

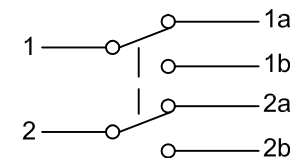

CIRCUIT DIAGRAM
(DPDT) ON-ON

⚠ B=ON-ON
E=ON-OFF-ON
SW-R2-4X-S-XX-1

	Actuator Color
BLANK	Standard Black
W	White
R	Red
G	Green
Y	Yellow (Amber)
B	Blue
O	Orange

	Actuator Markings
1	
5	
6	

Replace "x" in P/N with the corresponding switch color and marking

SPECIFICATIONS:

Material:

Body: Nylon 66, Color Black, Rated UL 94V-0

Terminal: Brass, Silver plated

Button: Nylon 66, Solid color, White color markings. (See Chart)

Electrical:

The rated load: 250V AC, 6A

125V AC, 10A

Contact resistance: 50 mohms max

Insulation resistance: 100 Mohms min

Dielectric withstanding voltage: 1500 VAC for 1 minute

Mechanical:

Endurance: 10000 Cycles

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ±.10 Ø.X ±.10
.XX ±.020 Ø.XX ±.015
.XXX ±.015 Ø.XXX ±.010

APPROVALS

DRAWN	OW	DATE
CHECKED	AC	10/16/20
APPROVED		

ADAM
TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
SWITCH, MINIATURE ROCKER, DPDT,
SOLDER TERMINAL, ON-ON & ON-OFF-ON

SIZE	PART NO.	REV.
X	SW-R2-4X-S-XX-1	-
REF:	S00206C	SCALE: NTS
SHEET	1	OF 1