

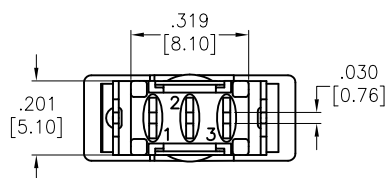

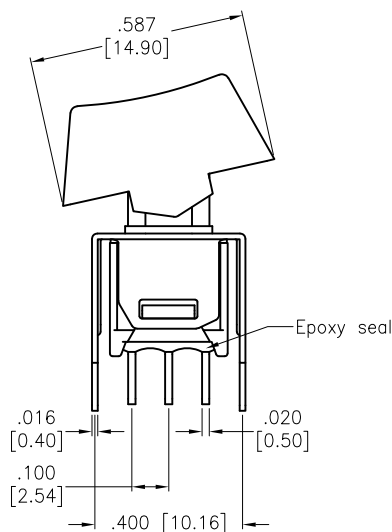


APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

| Rev | AWO # | Description  | Date     | Appr  |
|-----|-------|--------------|----------|-------|
| -   |       | RELEASED     | 12/23/20 |       |
| A   |       | UPDATE TITLE | 6/25/21  | WX/RC |

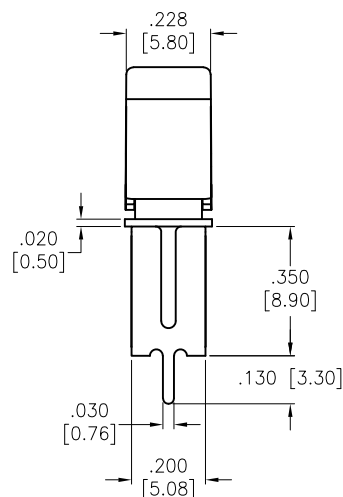

CIRCUIT DIAGRAM  
(SPDT) ON-ON

# SPECIFICATIONS:

## Material:

Movable contact: Copper Alloy, Gold over Nickel Plated

Terminals: Copper Alloy, Gold over Nickel Plated

Cap Actuator: Plastic, color Black

## Electrical:

Rating: 0.4 VA max @ 20V max (AC or DC)

Contact resistance: 20 mohms max initial

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 1,500V RMS @ sea level

Electrical life: 30,000 make and break cycles at full load

Temperature Rating:

Operating temperature: -30°C to +85°C

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED  
ALL DIMENSIONS ARE INCHES [MM]  
TOLERANCES: EXCEPT AS NOTED  
INCHES HOLES

|      |        |       |        |
|------|--------|-------|--------|
| .X   | ± .10  | Ø.X   | ± .10  |
| .XX  | ± .020 | Ø.XX  | ± .015 |
| .XXX | ± .015 | Ø.XXX | ± .010 |

| APPROVALS |    | DATE     |
|-----------|----|----------|
| DRAWN     | OW | 12/23/20 |
| CHECKED   | AC | 12/23/20 |
| APPROVED  |    |          |

**ADAM**  
**TECH**

909 Rahway Avenue,  
Union, NJ 07083  
Phone: 908-687-5000  
Fax: 908-687-5710

TITLE  
SUB-MINIATURE ROCKER SWITCH, SPDT, ON-ON,  
PCB VERTICAL MOUNTING TYPE, SMALL BLACK ROCKER

| SIZE | PART NO.            | REV.         |
|------|---------------------|--------------|
| X    | SW-R3-2B-B-SB5-G-13 | A            |
| REF: | S00198T             | SCALE: NTS   |
|      |                     | SHEET 1 OF 1 |