
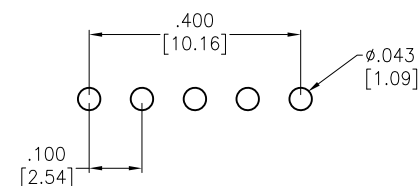
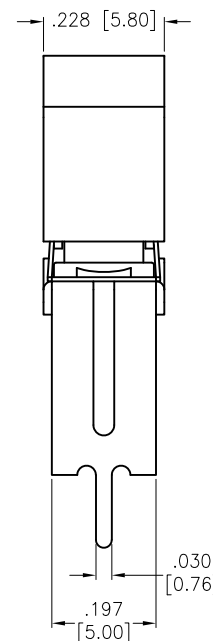
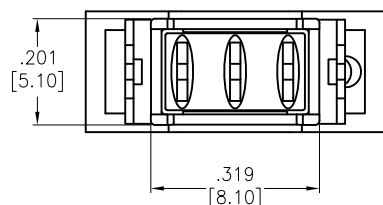



APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/22/20	
A		UPDATE TITLE	6/25/21	WX/RC

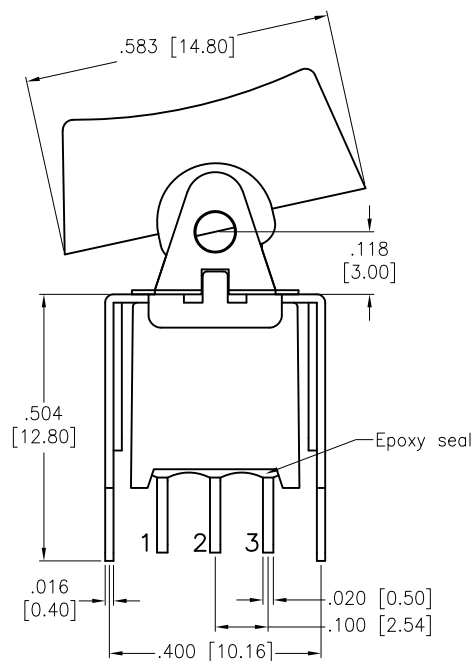

RECOMMENDED PCB LAYOUT



CIRCUIT DIAGRAM
(SPDT) ON-ON

SWITCH MARKINGS



SPECIFICATIONS:

Material:

Movable contact: Copper Alloy, Gold over Nickel Plated

Terminals: Copper Alloy, Gold over Nickel Plated

Cap Actuator: Plastic, color Black

Electrical:

Rating: 0.4 VA max @ 20V max (AC or DC)

Contact resistance: 20 mohms max initial

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 1,500V RMS @ sea level

Electrical life: 30,000 make and break cycles at full load

Temperature Rating:

Operating temperature: -30°C to +85°C

Environmental:

IP Class: IP67

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS		DATE
DRAWN	LH	12/22/20
CHECKED	AC	12/22/20
APPROVED		

ADAM
TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
SUB-MINIATURE ROCKER SWITCH, SPDT, ON-ON,
PCB VERTICAL MOUNTING TYPE, SMALL BLACK ROCKER

SIZE	PART NO.	REV.
X	SW-R3-2B-B-SB5-G-14	A
REF:	S00198T	SCALE: NTS
SHEET 1 OF 1		