

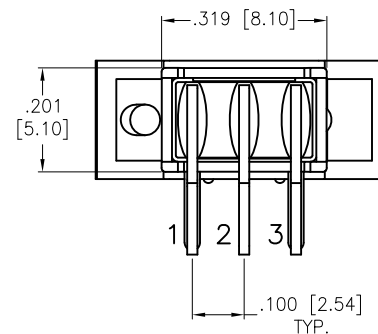
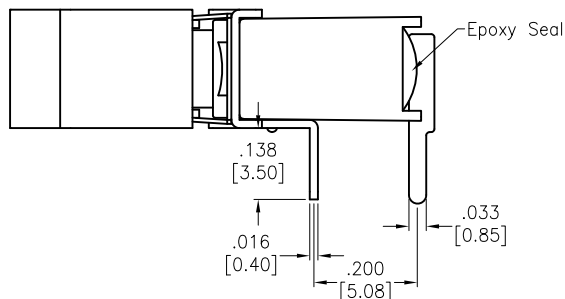




APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/22/20	
A		UPDATE TITLE	6/25/21	JJ/RC

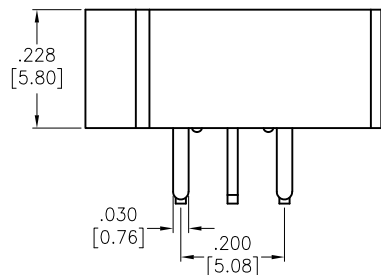

RECOMMENDED PCB LAYOUT

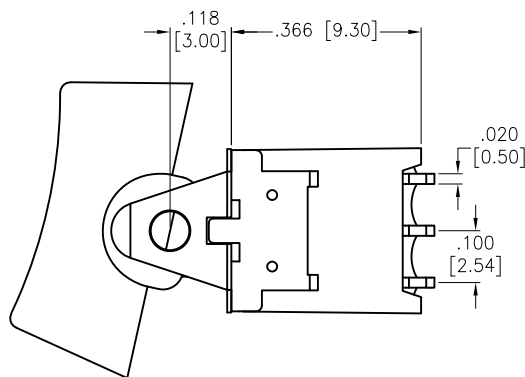

CIRCUIT DIAGRAM
(SPDT) ON-ON

SWITCH MARKINGS



SPECIFICATIONS:

Material:

Movable contact: Copper Alloy, Gold over Nickel Plated

Terminals: Copper Alloy, Gold over Nickel Plated

Electrical:

Rating: 0.4 VA max @20V AC/DC

Contact resistance: 20 mohms max initial

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 1,500V RMS @ sea level

Electrical life: 30,000 make and break cycles at full load

Temperature Rating:

Operating temperature: -30°C to +85°C

Environmental:

IP Class: IP67

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010

DRAWN OW 12/22/20

CHECKED AC 12/22/20

APPROVED

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECH

**ADAM
TECH**

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
SUB-MINIATURE ROCKER SWITCH, SPDT,
ON-ON, PCB RIGHT ANGLE, SMALL BLACK ROCKER

SIZE X PART NO. SW-R3-2B-C-SB5-G-14 REV. A

REF: S00198T SCALE: NTS SHEET 1 OF 1