



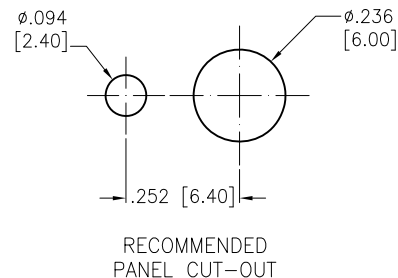
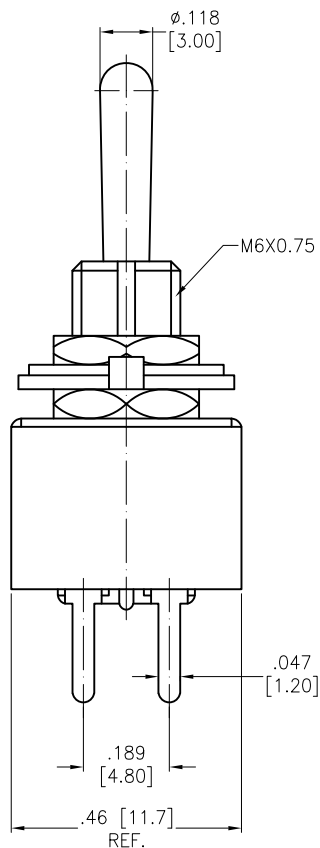


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/11/21	
A		UPDATED SPEC.	5/27/22	JJ/MC
B		UPDATED SPEC.	11/22/22	WX/AC1

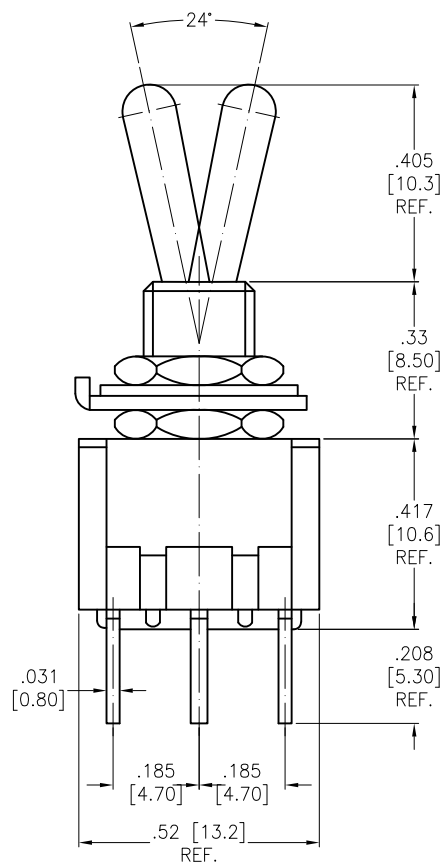

2 WAY



3 WAY

SW-T2-4X-B-A2-MA2

—B=ON-ON (2 WAY)

—D=ON-(ON) (2 WAY)

—E=ON-OFF-ON (3 WAY)

—F=ON-OFF-(ON) (3 WAY)

—G=(ON)-OFF-(ON) (3 WAY)

—H=ON-ON-ON (3 WAY)

SPECIFICATIONS:

Material:

Body: Bakelite, Color: Red

Lever: Brass, Nickel plated

Terminal: Brass, Silver plated

Electrical:

Rating: 3A @ 250V AC

6A @ 125V AC

Contact resistance: 20 mΩ max

Insulation resistance: 1000 MΩ min (500VDC)

Dielectric withstanding voltage: 1500V AC for 1 minute

Electrical Life: 10,000 cycles

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

DRAWN	JJ	8/11/21
CHECKED	RC	8/11/21
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECH

ADAM
TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE SWITCH, TOGGLE MINIATURE, DPDT,
PCB VERTICAL TYPE

SIZE X	PART NO. SW-T2-4X-B-A2-MA2	REV. B
REF: -	SCALE: NTS	SHEET 1 OF 1