
SPECIFICATIONS

Model Number: WT24B3X-E3 Ver:01





Mechanical Drawing:

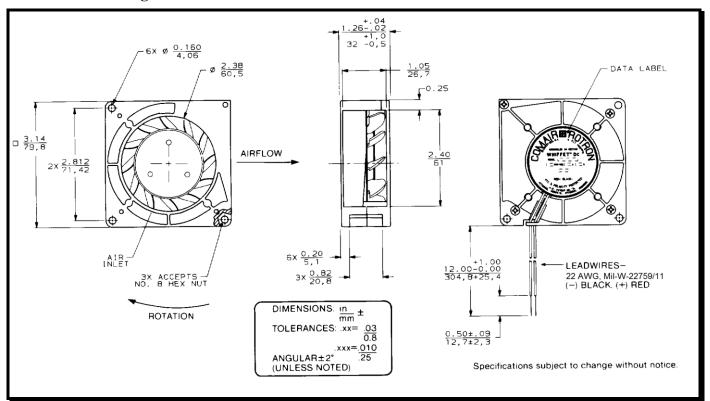

Motor:

Nominal Voltage = 24 vdcOperating Voltage Range = 12 - 28 vdcNominal Running Current = 0.22 amps Max. Locked Rotor Current = 0.525 ampsRunning Power = 5.28 watts Average Speed = 4050 RPM**Bearings** = Ball Air Flow = 15 CFM Acoustic $= 50.4 \, \mathrm{dBA}$

Construction:

Venturi: Plastic, Black, UL 94V-0 Propeller: Plastic, Black, UL 94V-0

Agency Approvals:

UL, CUL CE

Life Expectancy:

This fan is designed for continuous duty life of 55,000 hours at 70°C.

Additional Features:

Brushless DC Motor Locked Rotor Protection Polarity Protected

Operating Temperature: -10°C to 70°C Storage Temperature: -40°C to 85°C

IP 67

RoHS Compliant

Termination:

12" Lead wires, 22 AWG, Mil-W-22759/11

Red = Fan Power

Black = Fan Return



