

# AC AXIAL FAN 80x80x38mm




**Housing:** Die-Cast Aluminum, Painted Black  
**Blade:** Thermoplastic PBT, UL 94V-0  
**Insulation Resistance:** 100M $\Omega$ , 500VDC/min between bare wire and frame  
**Dielectric Strength:** 1500VAC for one minute  
**Operation Temperature:** -10°C~70°C(Humidity 35%-85%RH)  
**Storage Temperature:** -40°C~85°C(Humidity 35%-85%RH)  
**Motor Protection:** Impedance Protected  
**Weight:** 290 g      **Packing:** 60PCS/CTN



| Model Number   | Voltage (VAC) | Frequency (Hz) | AirFlow (CFM) | Stat.Pres. (mm-H <sub>2</sub> O) | Noise (dBA) | Speed (RPM) | Current (mA) | Power (W) | Available Bearing | Curves |
|----------------|---------------|----------------|---------------|----------------------------------|-------------|-------------|--------------|-----------|-------------------|--------|
| FA8038B11T5-96 | 115           | 50/60          | 26.4/29.4     | 3.9/4.4                          | 29.6/34.5   | 2,300/2,600 | 160/120      | 9/7       | B,S               | ①/②    |
| FA8038B11T7-96 | 115           | 50/60          | 29.4/32.5     | 4.1/4.9                          | 31.5/36.4   | 2,400/2,700 | 200/160      | 12/9      | B,S               | ③/④    |
| FA8038B22T5-96 | ※ 230         | 50/60          | 26.4/29.4     | 3.9/4.4                          | 29.6/34.5   | 2,200/2,600 | 65/50        | 11/8      | B,S               | ①/②    |
| FA8038B22T7-96 | ※ 230         | 50/60          | 29.4/32.5     | 4.1/4.9                          | 31.5/36.4   | 2,300/2,700 | 100/100      | 13/9      | B,S               | ③/④    |

- For "Sleeve" bearing version, change the "B" in the model number to "S".
- For "Wire Lead" version, change the "T" in the model number to "W".
- If model depicts "※", UL approvals can be implemented upon request.

Specifications are subject to change without notice

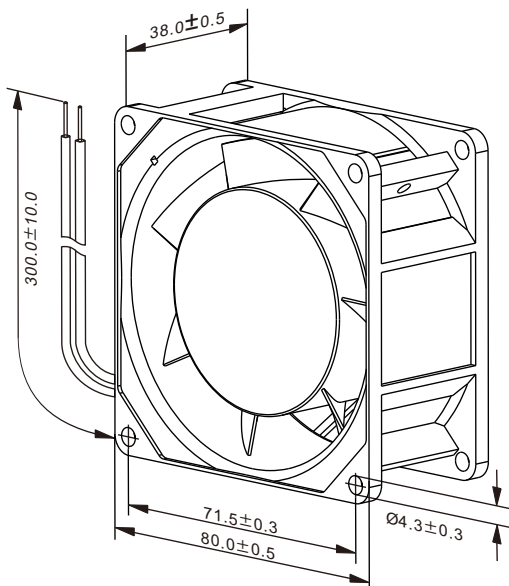

unit: mm

