


AD2506 SERIES


External Dimensions

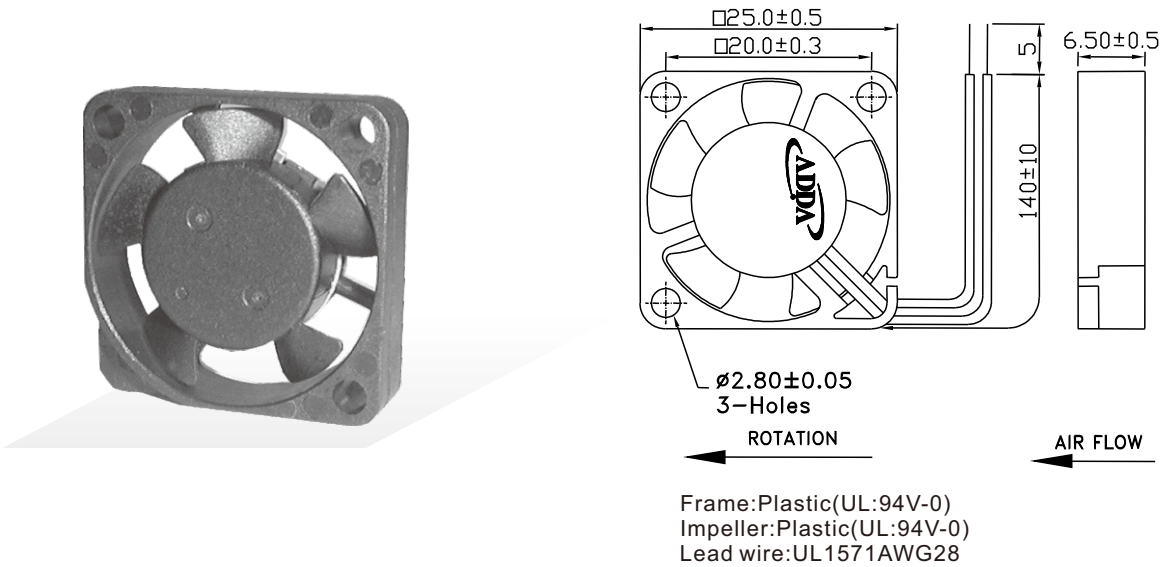

Specifications(Nominal)

*:Noise is measured at the distance of one (1) meter from the axis of intake.

Series	Model No	Bearing System type	Rated Voltage (VDC)	Current(A)	Power(W)	Rated Speed (rpm)	Maximum Air Flow (CMM)	Maximum Air Flow (CFM)	Maximum Pressure (InAq)	Maximum Pressure (mmAq)	Noise Level (dB/A)	Weight(g)
AD2506	AD0205DX-K50(TX)	Sleeve	5	0.03	0.15	7000	0.040	1.400	0.060	1.524	18.5	5
AD2506	AD0205LX-K50(TX)	Sleeve	5	0.05	0.25	9000	0.046	1.615	0.128	3.251	21.8	5
AD2506	AD0205MX-K50(TX)	Sleeve	5	0.11	0.55	12000	0.068	2.400	0.185	4.699	30.5	5
AD2506	AD0212LX-K50(TX)	Sleeve	12	0.05	0.55	9000	0.046	1.615	0.128	3.251	26.2	5
AD2506	AD0212MX-K50(TX)	Sleeve	12	0.05	0.64	12000	0.068	2.400	0.185	4.699	30.5	5

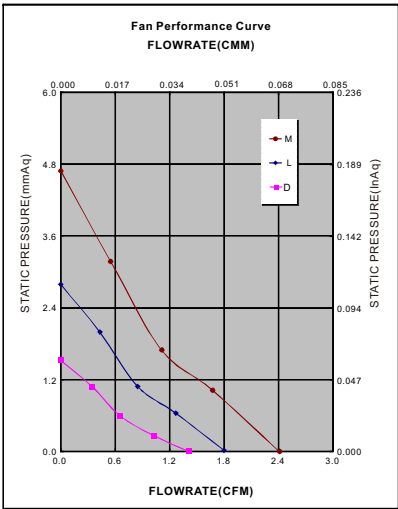

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
✓					✓					

*Safety approvals

				
✓	✓			✓