




Specifications(Nominal)

Series	Model No	Bearing System type	Rated Voltage (VDC)	Current(A)	Power(W)	Rated Speed (rpm)	Maximum Air Flow (CMM)	Maximum Air Flow (CFM)	Maximum Pressure (InAq)	Maximum Pressure (mmAq)	Noise Level (dB/A)	Weight(g)	
AD4010	AD0405LB-G70(T1)	Ball		5	0.07	0.35	4200	0.116	4.100	0.060	1.524	21.0	17
AD4010	AD0405MB-G70(T1)	Ball		5	0.08	0.40	4800	0.133	4.700	0.078	1.981	24.0	17
AD4010	AD0405HB-G70(T1)	Ball		5	0.17	0.85	6000	0.170	6.000	0.119	3.040	30.5	17
AD4010	AD0412LB-G70(T1)	Ball		12	0.05	0.60	4200	0.116	4.100	0.060	1.524	21.0	17
AD4010	AD0412MB-G70(T1)	Ball		12	0.06	0.72	4800	0.133	4.700	0.078	1.981	24.0	17
AD4010	AD0412HB-G70(T1)	Ball		12	0.07	0.84	6000	0.170	6.000	0.119	3.040	30.5	17
AD4010	AD0412UB-G70(T1)	Ball		12	0.07	0.84	6800	0.190	6.700	0.149	3.785	33.5	17
AD4010	AD0424LB-G70(BT1)	Ball		24	0.05	1.20	4200	0.116	4.100	0.060	1.524	21.0	17
AD4010	AD0424MB-G70(BT1)	Ball		24	0.05	1.20	4800	0.133	4.700	0.078	1.981	24.0	17
AD4010	AD0424HB-G70(BT1)	Ball		24	0.04	0.96	6000	0.170	6.000	0.119	3.040	30.5	17
AD4010	AD0424UB-G70(BT1)	Ball		24	0.04	0.96	6800	0.190	6.700	0.149	3.785	33.5	17

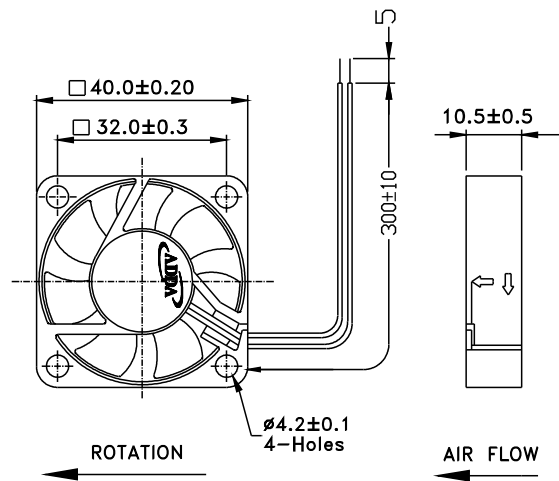

0	1	2	3	4	6	7	8	9	A	B
✓	✓	✓	✓		✓			✓		✓

*Safety approvals