
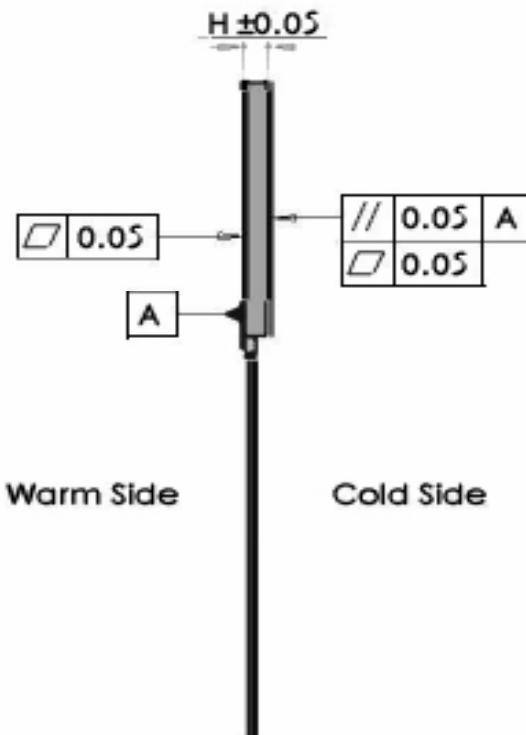


Thermoelectric cooler module, high temperature

Data sheet

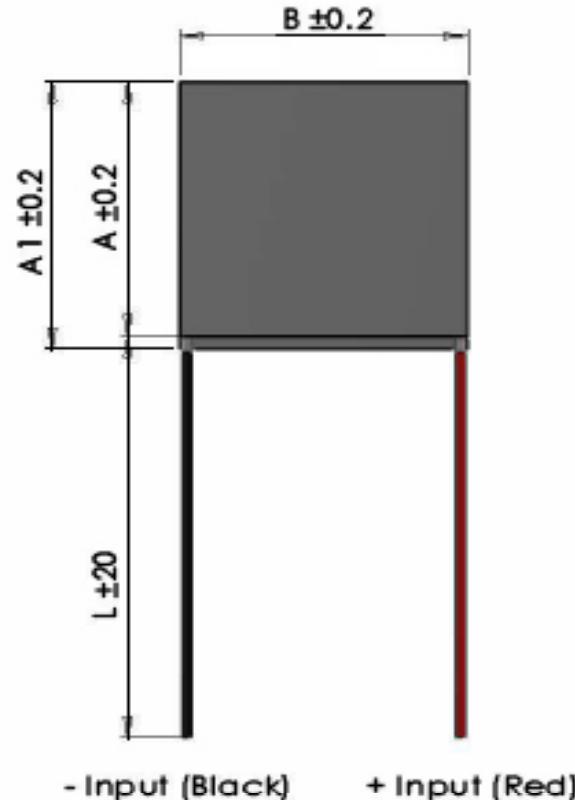

I _{max}	[A]	8
V _{max}	[Vdc]	9
P _c max	[W]	
ΔT _{max}	[°C]	
Max hot side temp.	[°C]	150
A	[mm]	30
A ₁	[mm]	
B	[mm]	30
H	[mm]	3.2
Wire	AWG	n/a

(At hot side temperature $Th = 25^{\circ}\text{C} / 298\text{K}$, under dry N_2).

P_c max = Cooling power at $\Delta T = 0$ and $I = I_{\text{max}}$.

ΔT_{max} = Temperature difference at $I = I_{\text{max}}$ and $P_c = 0$.

Max hot side temperature given for best long term performance.



Max mounting pressure: 1.5MPa.

Wires:




Thermoelectric cooler module, high temperature

Data sheet - At hot side temperature 25°C

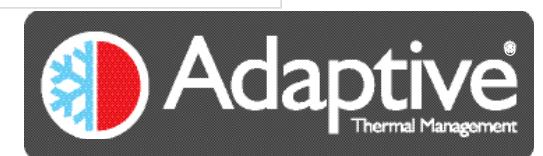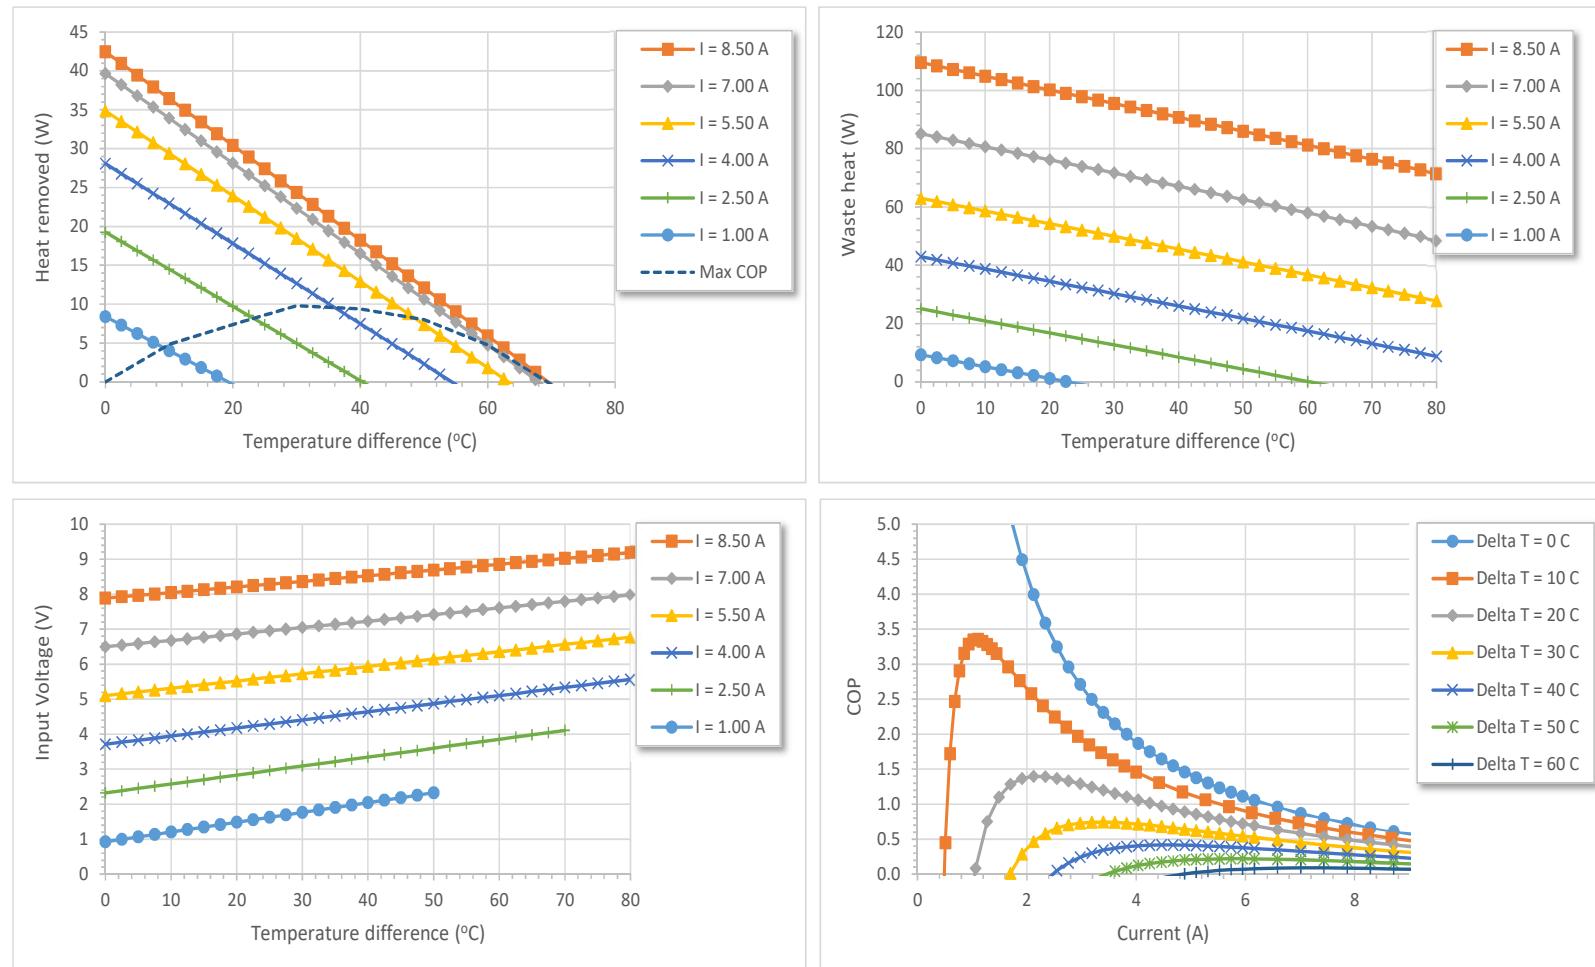

Thermoelectric cooler module, high temperature

Data sheet - At hot side temperature 50°C

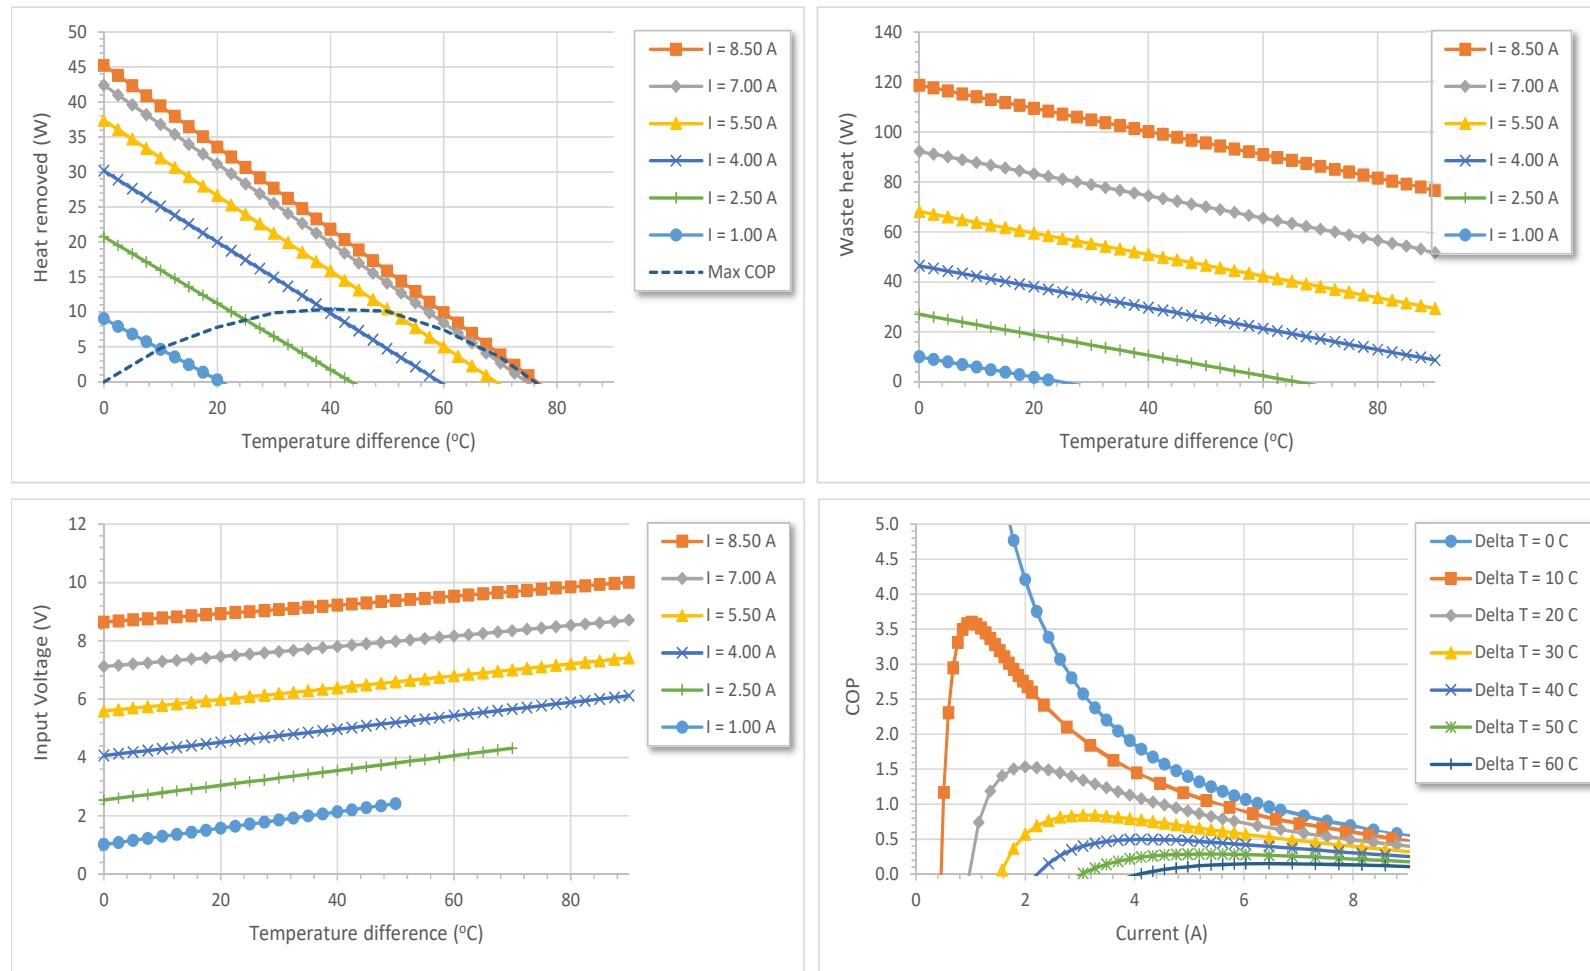

Thermoelectric cooler module, high temperature

Data sheet - At hot side temperature 75°C

