



Specification For Approval

Customer : _____
Description : Thermoelectric Cooling 200W
Customer part no : _____ Rev. : _____
Delta model no : HET200PB-A01 Rev. : 00
Sample issue no : _____
Sample issue date : FEB.15 2022

Please send one copy of this specification back after
you signed approval for production pre-arrangement

Approved by : _____

Date : _____

DELTA ELECTRONICS, INC.
252, SHANG YING ROAD, KUEI SAN
TAOYUAN HSIEN 333, TAIWAN, R. O. C.

TEL : 886-(0)3-3591968
FAX : 886-(0)3-3591991

Part no. :

Delta model no. : HET200PB-A01

Table of content

1. Description	4
1-1. General description :	4
1-2. Main feature (Operating 48VDC at 25 ° C).....	4
1-3. Dimension	5
1-4. Maintenance	7
1-5. Thermal path and airflow baffle	7
2. Electrical specification.....	8
2-1. Indicator & connector	8
2-2. Cooling Performance VS Temperature Difference	8
2-3. TEC work temperature range.....	9
2-4. Interface	9
3. Environmental conditions	11
3-1. Operating temperature :	11
3-2. Storage temperature :	11
3-3. Humidity	11
3-4. Protection rating	11
3-5. MTBF	11
4. Certified safety	12
4-1. Mark	12
5. User cable	12
5-1 Power cable	12
5-2 Alarm cable	12
6. Versions	13

Part no. :

Delta model no. : HET200PB-A01

Specification for approval

Customer :

Description : Thermal Electric Cooling 200W

Customer P/N :

Rev. :

Delta model no. : HET200PB-A01



Rev. : 00

Sample revision :

Issue no. :

Sample issue date :

Quantity : sets

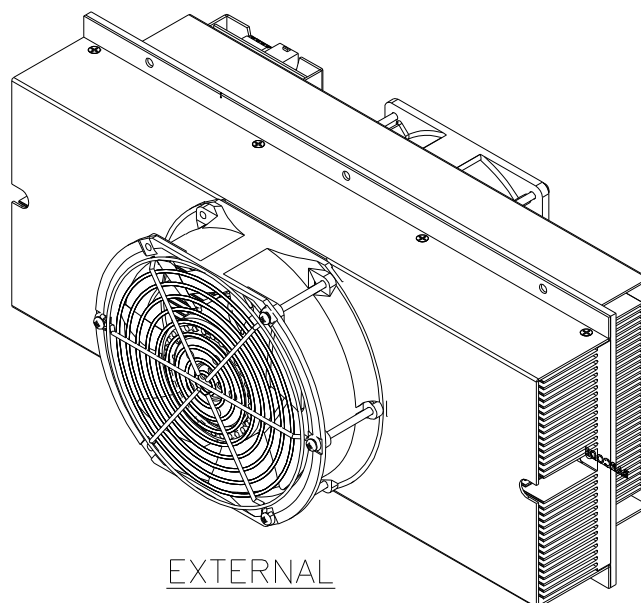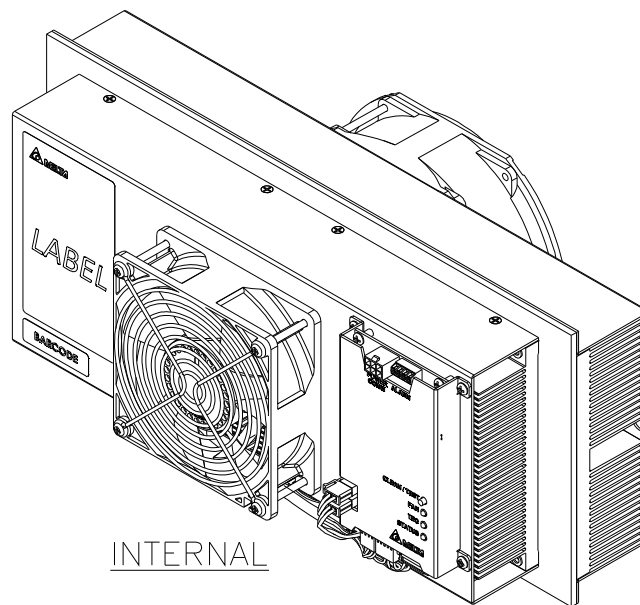

Part no. :

Delta model no. : HET200PB-A01

1. Description

1-1. General description :

The Thermal Electric Cooling (TEC) is designed for direct air to air heat removal in the cabinet. It is easy to be installed in the cabinet (recommended on the door of the cabinet) with the nuts.

The internal and external air circulation loops of the TEC Module are separated to prevent the entry of dust, humidity and dirt. The unit conforms to IP68 protection rating on the external air circuit.

*IP68: 1.1 m underwater for one hour

1-2. Main feature (Operating 48VDC at 25 ° C)

Main feature	Unit	Model Number
		HET200PB-A01
Outline dimension	mm	400 H x 180 W x 208 D
Weight	Kg	9.0 ± 0.5
Cooling capacity ($\Delta T = 0$ °C)	W	200
Heating capacity @-40 ° C	W	225
Rated voltage	VDC	48 (TYP.)
Operating voltage range	VDC	40~56
Actuality Current	A	5.9 (TYP.)
Rated Current	A	8.0(MAX.)
Rated Consumption	W	384(MAX.)
Operating temperature	°C	-40~55
Internal airflow rate	cfm	100 (TYP.)
External airflow rate		120 (TYP.)
Acoustic noise at 1M :	dB-A	61.0 dB-A (Typ.)
(Sound pressure)		65.0 (Max.)

*Cooling capacity is defined at $\Delta T = 0^{\circ}\text{C}$ and $T_{\text{ambient}} = 25^{\circ}\text{C}$


*Cooling and heating capacity is for internal side.

Part no. :

Delta model no. : HET200PB-A01

1-3. Dimension

1-3-1 Drawing

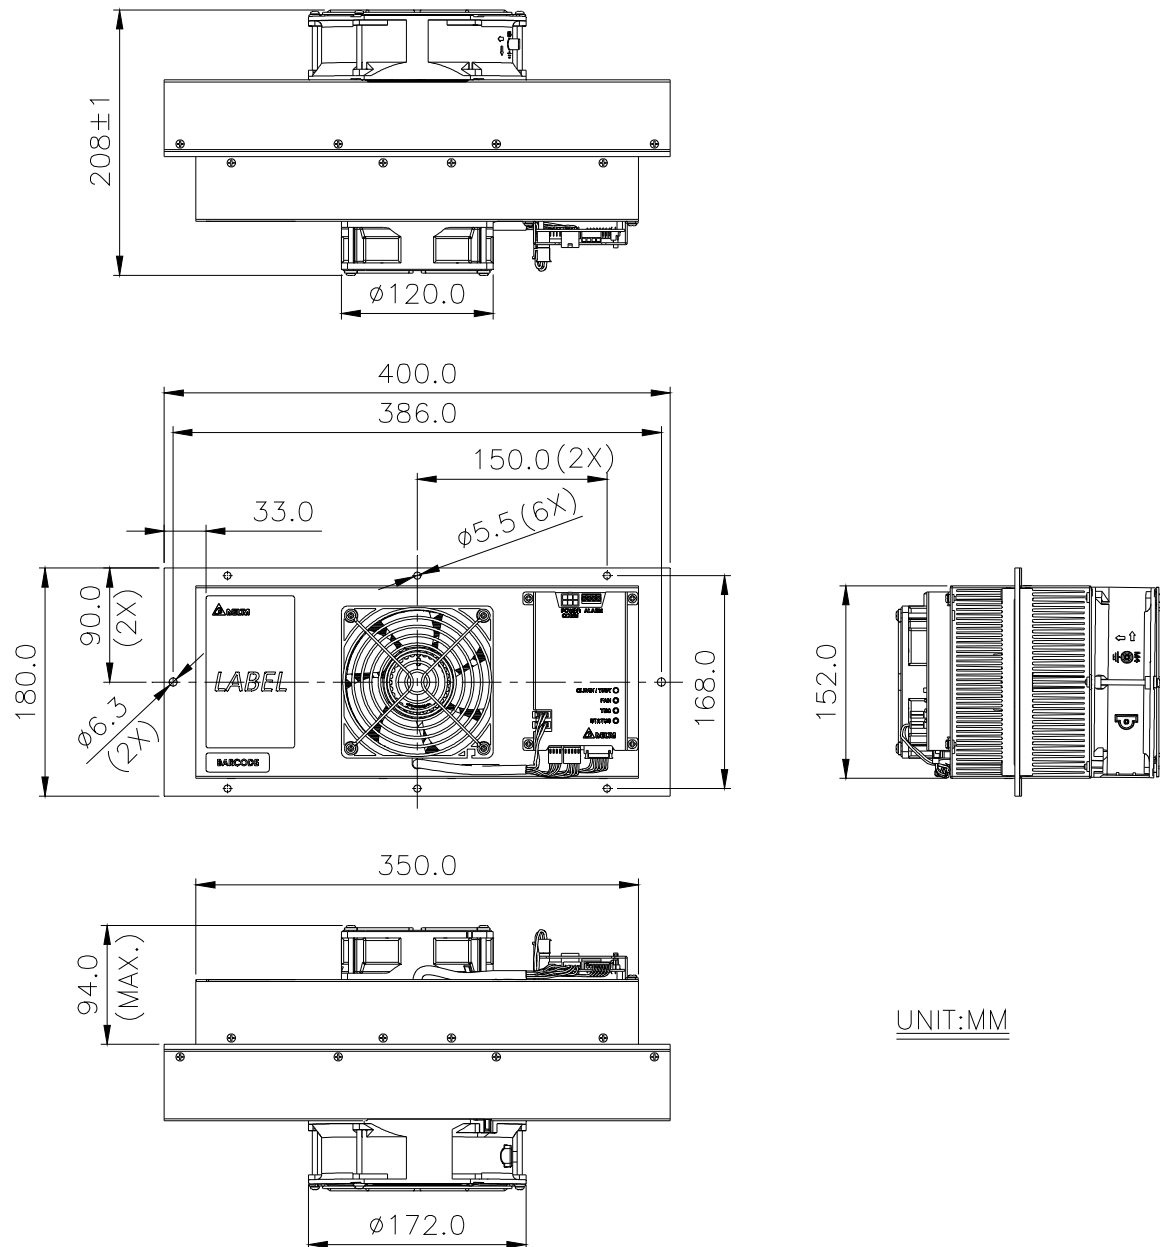

UNIT:MM

(1) Material : case aluminum sheet , t=1.5mm

(2) Finish : Power paint 75~120um,

(3) Color : RAL 7032

(4) Dimension tolerance:



X.X [X.XX] : $\pm 1.0\text{mm}$ [0.04"]

X.XX [X.XXX] : $\pm 0.3\text{mm}$ [0.012"]

1-3-2 Mounting panel cutout

Part no. :

Delta model no. : HET200PB-A01

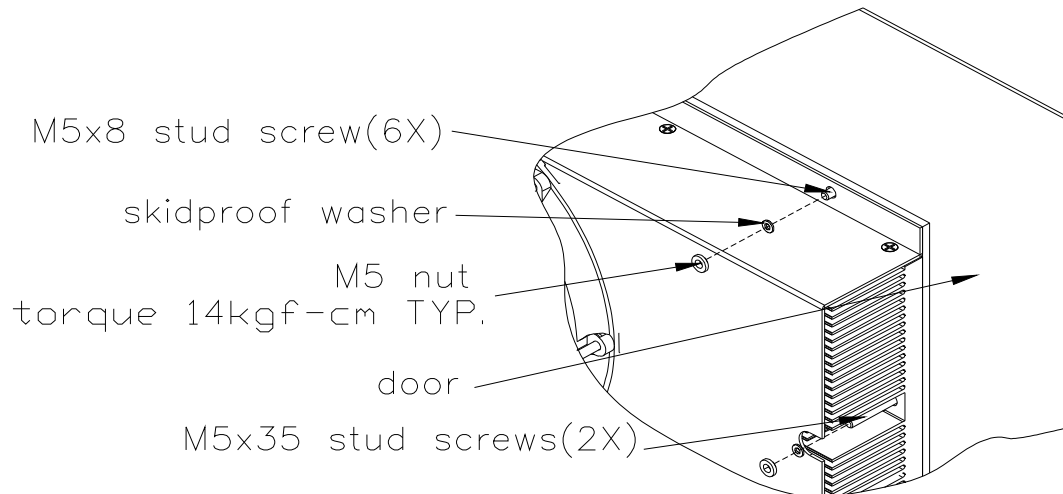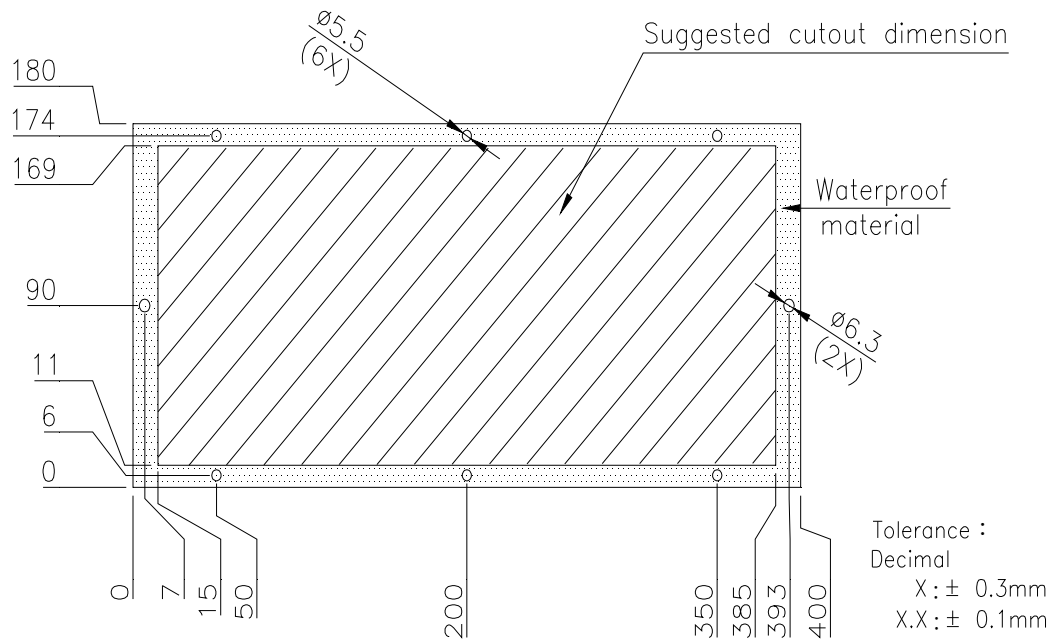

Part no. :

Delta model no. : HET200PB-A01

1-4. Maintenance

- 1-4-1. Be sure to disconnect power supply before disassembly TEC module from customer cabinet.
- 1-4-2. Please refer to Delta authorized engineers for TEC module component replacement service, no allow unauthorized personnel to repair the unit.
- 1-4-3. If the replacement by user himself is necessary, please refer to the exploded drawing shown as previous page and below description for disassembly.

External fan: Disassemble mounting screw of external fan via screw driver & pull out the connector.


Internal fan: Disassemble mounting screw of internal fan via screw Driver & pull out the connector.

Controller: Need to disassemble internal fan first , then pull-out all cable connection on controller , take off mounting screw of controller finally .

TEC device: Due to TEC device have waterproof sealant protection and thermal conductive compound with heat-sink, please kindly ship back to Delta for replacement.

1-5. Thermal path and airflow baffle

The thermal exchange path is shown in the figure below.

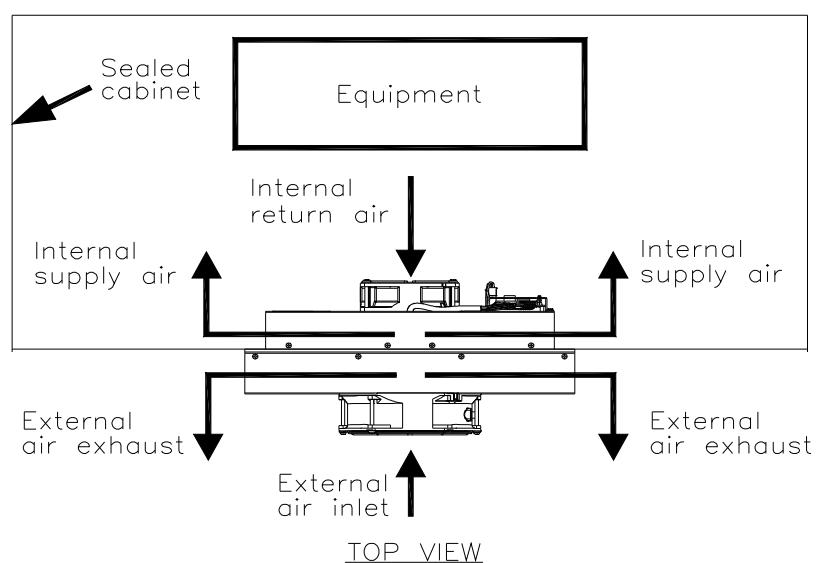

Part no. :

Delta model no. : HET200PB-A01

2. Electrical specification

2-1. Indicator & connector


Connector " -48V VDC " mate with JWT C4201WR0-2*3PNL



PIN	Function	PIN	Function
1	-48V (-)	4	-48V (-)
2	NA	5	NA
3	0V (+)	6	0V (+)

2-2. Cooling Performance VS Temperature Difference

Cooling Performance VS Temperature Difference

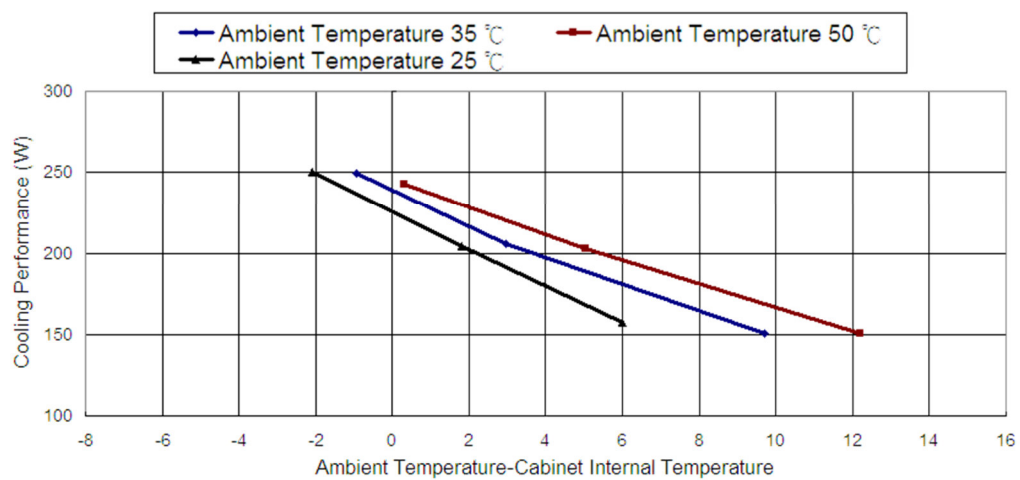


Part no. :


Delta model no. : HET200PB-A01

2-3. TEC work temperature range

HET200PB-A01 has two work status, cooling and heating, according to the cabinet internal temperature (detect by on-board NTC).

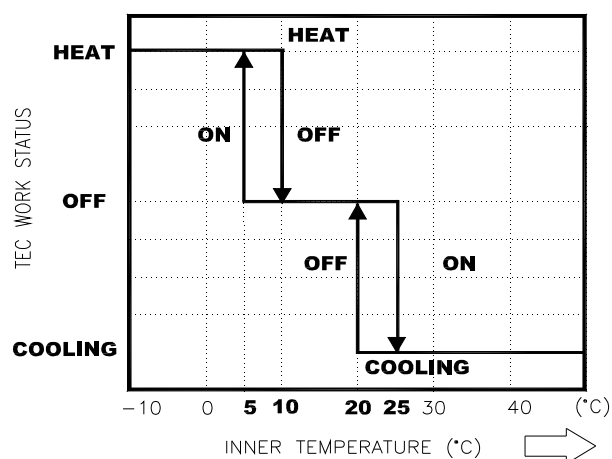

2-4. Interface

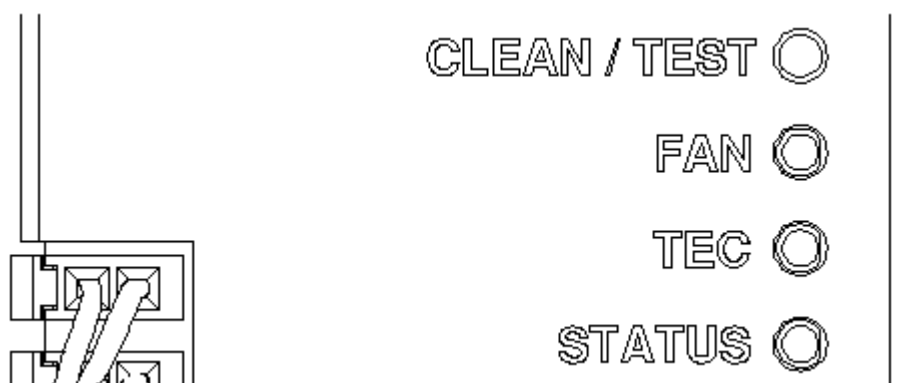

- LED "FAN"
 - (Green) : Fan normal
 - (Red) : Fan failed
 - (Blink Green) : Fan normal in test process
 - (Blink Red) : Fan failed in test process
- LED "TEC" *
 - (Green) : TEC normal
 - (Red) : TEC failed
 - (Blink green) : TEC normal in test process
 - (Blink red) : TEC failed in test process or sensor failed
- LED "STATUS"
 - (Green) : HET200PB-A01 work in cooling mode

Part no. :

Delta model no. : HET200PB-A01


(Orange) : HET200PB-A01 work in heating mode

(Dark): HET200PB-A01 TEC function OFF

■ CLEAN/TEST

There is a auto test button on HET200PB-A01, user can press this button to run HET200PB-A01 heating and cooling process, the process is about 3~4 mints. User can turn off this function by pressing this button again.

*:HET200PB-A01 will detect internal fan income air temperature and sink surface temperature, It will compare two temperature to determine TEC is normal or not.

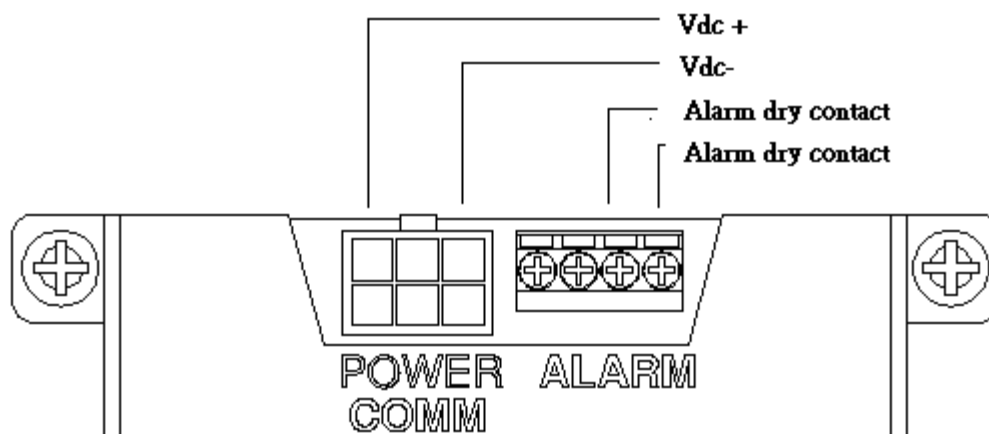

Alarm dry contact:

- Pin to pin "Open":
Normal
- Pin to pin "Close":
Fan , TEC or sensor failed

Connector "Alarm"

Pin to Pin ----- MAX. ($\pm$ 75VDC) 50mA

Part no. :

Delta model no. : HET200PB-A01

3. Environmental conditions

3-1. Operating temperature :

-40°C ~ +55°C (14°F ~ 149°F)

3-2. Storage temperature :

-40°C ~ +65°C (-40°F ~ 149°F)

3-3. Humidity

External air circuit: 0 ~ 100% RH

Internal air circuit: 0 ~ 90% RH

3-4. Protection rating

IP68 (IEC60529) on external side with mounting on door.

*IP68: 1.1 m underwater for one hour

Comply with GR487 salt fog test on external fan

3-5. MTBF

Fan lifetime is expected to have a minimum L10 life of 80,000 hours
continuous operation at 40°C with 15 ~ 65%RH at 48 voltage

Part no. :

Delta model no. : HET200PB-A01

4. Certified safety


4-1. Mark



5. User cable


Each HET200PB-A01 will provide 2 cables with shipment.

5-1 Power cable

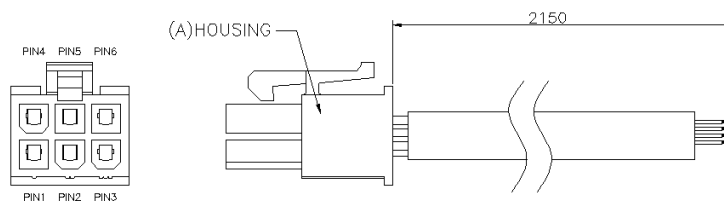

PINOUTS				
CONNECTOR (A)		CABLE WIRE COLOR	CABLE WIRE COLOR	CABLE WIRE TYPE
(A) - PIN 1		BLACK	-48V	UL 1061 AWG#22
(A) - PIN 3		RED	+0V	
(A) - PIN 4		BLACK	-48V	
(A) - PIN 6		RED	+0V	

5-2 Alarm cable

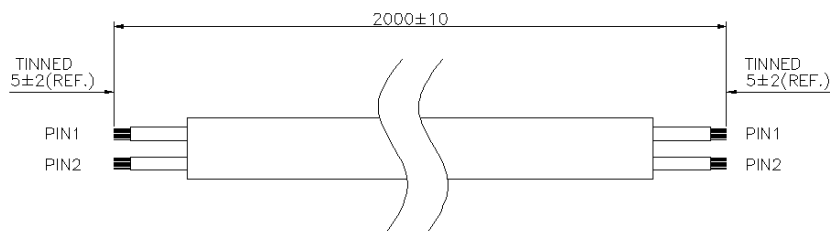

PINOUTS			
Wire		CABLE WIRE COLOR	CABLE WIRE TYPE
PIN 1		BROWN	UL 1061 AWG#22
PIN 2		BLUE	

Part no. :

Delta model no. : HET200PB-A01

6. Versions

REV	DESCRIPTION	DRAWN	CHECKED			APPROVE D	ISSUE DATE
			ME	EE	CE		
00	ISSUE SPEC	Rex.Lyu 02.15'22	Rex.Lyu 02.15'22	Ted.Tu 02.15'22	-----	Diamond CHEN / MARS.WU 02.15'22	02.15'22