



## **NSC0500-LT**

1/2 Ton Air Cooled Ultra Low Temp Chiller

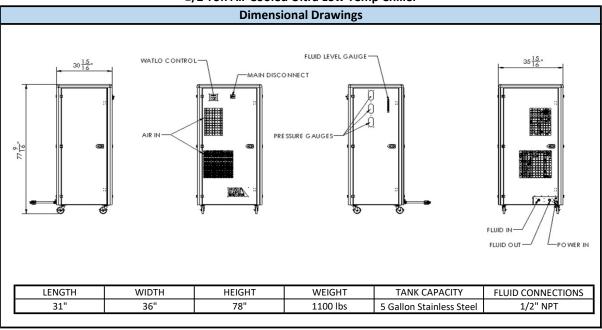

## **Chiller Performance Cooling Capacity** 4000 120 3500 100 3000 Capacity (BTU/hr) 80 2500 Head (PSI) 2000 60 1500 40 1000 500 20 -80 -75 -100 -85 Fluid Outlet Temperature (F)

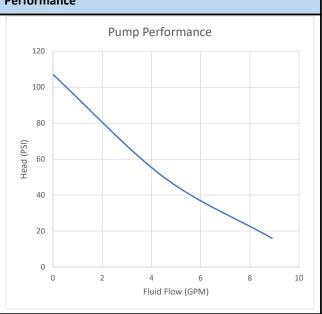

## **North Slope Chillers**

3130 South 1030 West, Suite 1 Salt Lake City, UT 84119 (866) 826-2993 www.NorthSlopeChillers.com











## **NSC0500-ULT**

Standard Features and Benefits						
Performance	Working Temperature Range	-112°F(-80°C) to 70°F(21°C)				
	Temperature Stability	1	±2			
	Cooling Capacity @ 70°F	70°F Ambient				
		-94°F (-70°C) - 2,200 BTU/hr (640 Watts)				
		-85°F (-65°C) - 2,900 BTU/hr (850 Watts)				
	Ambient Temperature (Standard)	40°F - 100°F				
	Pump Performance	0 GPM @ 107 PSI				
		4.5 GPM @ 50 PSI				
		8.9 GPM @ 16 PSI				
User Interface	Controls	Electronic Programmed Temperature Controller (PLC) with Constant (Setpoint & Process)				
		Temperature Readout				
	Additional Features	Fluid Level Indicator, Touch Screen Controls				
Refrigeration Circuit	Compressor	Copeland Scroll				
	Heat Exchanger	Brazed Plate Heat Exchanger				
	Refrigerant	R404a/R508b				
	Additional Features	Access Ports, Service Valves, Filter Drier, Sight Glass, Liquid Receiver, Thermostatic Expansion Valve (TXV), Oil Separator				
	Max Heat Rejection	19,500 BTU/hr (5.7 kW)				
Process Fluid Circuit	Pump	Continuous Duty, 0.75kW Vortex Pump				
	Inlet/Outlet	1/2" NPT				
	Reservoir	5 Gallon Stainless Steel				
	Additional Features	Inline Strainer, Inlet and Outlet Temperature Sensors, Pump Discharge Pressure Transducer				
Construction	Frame	Galvanized Steel				
	Enclosure	Powder Coated Steel Enclosure with Easy Access Panels				
	Warranty	1 Year Standard Warranty				
Quality	UL/CSA Certified (Full Assembly)	ETL 3170655, UL STD 61010-2-011, CAN/CSA STD, C22.2 No. 61010-2-011				
	Manufacturing	Manufactured in the U.S.A. Certified ISO 9001:2015 Company				
Power	Available Voltages	Max Amps (FLA)	Recommended Breaker/Service (MCA)			
	208-240VAC / 3P / 60Hz (STANDARD) 208-240VAC / 1P / 60Hz 480VAC / 3P / 60Hz	26 Amps (std)	30 Amps (std)			

Optional Upgrades				
UPGRADES	Process Heating	External Temperature Monitoring Alternate Pumps	Controller Crating	
	More Options and Customization Available - Contact Factory for More Information			

**North Slope Chillers** 

3130 South 1030 West, Suite 1 Salt Lake City, UT 84119 (866) 826-2993 www.NorthSlopeChillers.com All Information Is For Reference Only





