



OA180APL IP Rated All Metal Series



AC Fans - 115, 230V
180mm x 65mm (7.1" x 2.5")

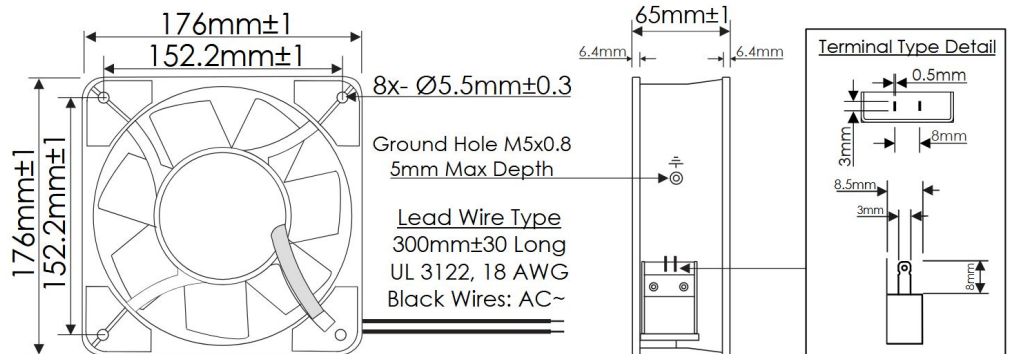

Frame	Die Cast Aluminum, Black Finish	<u>Operating Temperature</u> -30°C ~ +80°C <u>Storage Temperature</u> -40°C ~ +100°C <u>Life Expectancy</u> 50,000 Hours (L10 at 55°C) <u>Available Options</u> Other IP Ratings Connectors Custom Wire Lead Length Weight: 3.96 lbs.
Impeller	Steel, 7 Blades	
Connection	Lead Wires, 18 AWG, or Terminals	
Motor	AC, Capacitor Induction, Single Phase, Thermally Protected, IP68 or IP69K	
Bearing System	Ball Bearings	
Dielectric Strength	1500VAC/min, <5mA	
Insulation Resistance	≥10MΩ @ 500V DC	

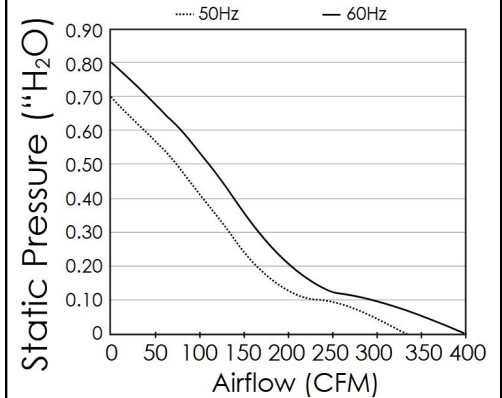

Part Number	Rated Voltage (Volts AC)	Voltage Range (Volts AC)	Frequency (Hertz)	Input Power (Watts)	Rated Speed (RPM)	Max Airflow (CFM)	Noise Level (dBA)	Max Static Pressure ("H ₂ O")
OA180APL-11-1*B18***	115	100 ~ 130	50 / 60	60 / 80	2700 / 3250	330 / 400	65	0.70 / 0.80
OA180APL-22-1*B18***	230	200 ~ 255	50 / 60	60 / 80	2700 / 3250	330 / 400	65	0.70 / 0.80

*Insert "T" for Terminal type power connection, or "W" for Lead Wire type power connection.

*** Insert "68" for IP68 Rating, or "69K" for IP69K Rating.