


OA9232EC Series



AC Fans - 115, 230V Universal Input
92mm x 32mm (3.62" x 1.26")

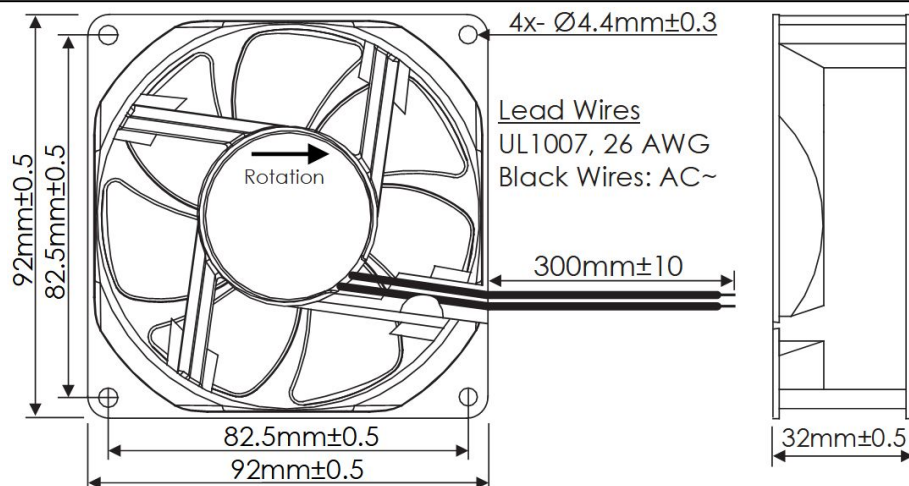

Frame	PBT, UL94 V-0 Plastic	<u>Operating Temperature</u> -20°C ~ +65°C <u>Storage Temperature</u> -20°C ~ +75°C <u>Life Expectancy</u> 70,000 Hours (L10 at 40°C) <u>Available Options</u> PWM Speed Control Input Tachometer Output Alarm Output IP Ratings Weight: 0.31 lbs.	Static Pressure ("H₂O") vs Airflow (CFM)
Impeller	PBT, UL94 V-0 Plastic		
Connection	2x Lead Wires, UL 1007 26 AWG		
Motor	Electronically Commutated, Electronically Protected		
Bearing System	Ball Bearings		
Dielectric Strength	1500VAC/min, <1mA		
Insulation Resistance	≥10MΩ @ 500 VDC		

Part Number	Voltage Range (Volts AC)	Frequency (Hertz)	Input Power (Watts)(Max)	Rated Speed (RPM)	Max Airflow (CFM)	Noise Level (dBA)	Max Static Pressure ("H ₂ O")
OA9232EC-UR-1WB	85 ~ 265	50 / 60	2.1 (8~6 Max)	3000	58	43.7	0.23