


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00056	Connector, dc plug, 3.5x1.35xL20mm, molding style, spring contacts	1	
2	50-00057	Connector, dc jack, 3.5x1.35xL16.5 mm, molding style	1	
3	30-00003	Wire, 2C BC, 24 AWG, UL2468, 300V, 80C, 3.6 mm, VW-1, PVC, 76A	1	
4	24-00002	Overmold, PVC, black	1	
5	24-00005	Overmold, PVC, black	1	

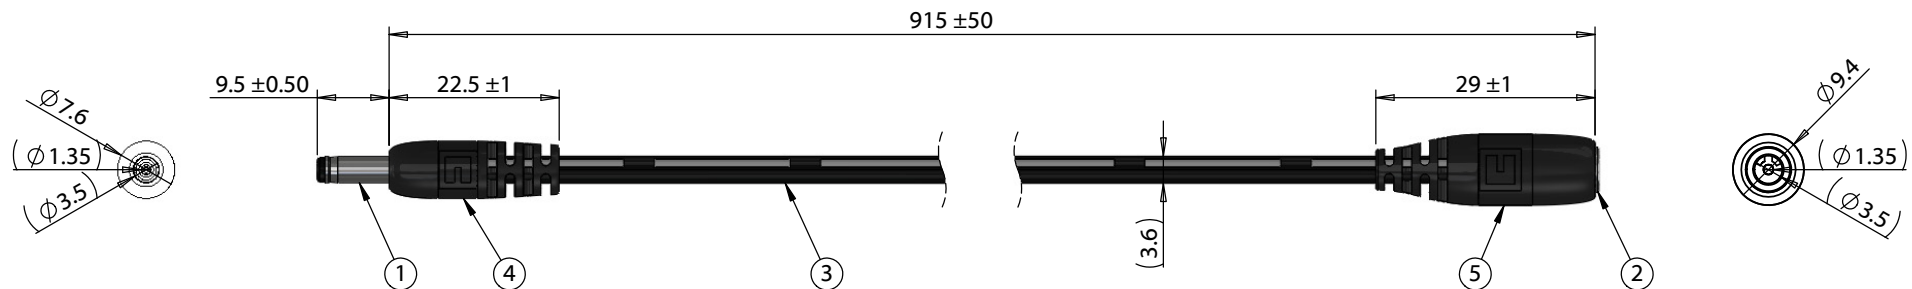

Notes:
Functionally equivalent components may be substituted
Cable rated for 48 V, 4.5 A

50-00056	Wiring diagram Wire Color	50-00057
Center	Black with stripe	Center
Sleeve	Black	Sleeve

Revision:	Date:	Description:	Prepared:	Notes:	TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com Size: A Part number: 10-01079 Scale: 1:2 Sheet 1 of 1
A	6/27/2012	Initial release	Verified:	RoHS compliant	
A1	10/7/2019	Updated cable ratings	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Function test: no open, no short circuit, no intermittent	
				Description: Cable, 915 mm, 3.5x1.35x9.5 mm 50-00056 dc plug to 3.5x1.35 mm 50-00057 jack, 24 AWG, 30-00003 wire	

5 4 3 2 1