
ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00025	Connector, dc jack, 5.5x2.1xL17.4 mm, molding style	1	
2	30-00396	Wire, 2C TS, 18 AWG, UL2468, 300V, 80C, 4.4 mm, VW-1, PVC, white	1	
3	24-00004	Overmold, PVC, white	1	

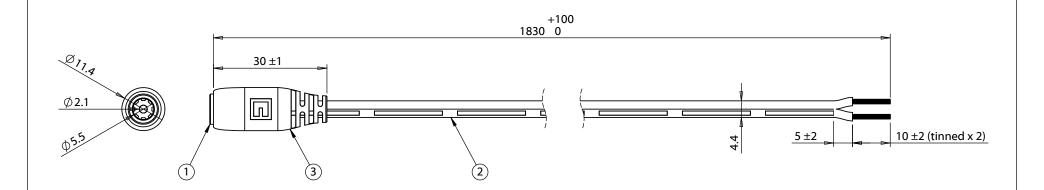

**Notes:** Cables individually tied and bundled in groups of 10

Functionally equivalent components may be substituted

7 A, 48 Vdc

Wiring Diagram						
50-00025	wire color					
center	white with stripe					
sleeve	white					

Revision:	Date:	Description:	Prepared:	Notes:					
Α	12/21/2015	Initial release		RoHS and REACH compliant		TENSILITY  tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com			
			Verified:	Function test: no open, no short circuit, no intermittent	te				
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm	Description: Cable, 1830 mm, 5.5x2.1 mm 50-00025 dc jack to	Size:	10.01060			
			X.X: ± 0.3 mm X.XX: ± 0.05 mm	stripped tinned, 18 AWG, 30-00396 wire, white		: 1:2		Sheet 1 of 1	
·		5	4	3 2	·			1	