


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00026	Connector, dc plug, 5.5x2.5xL23 mm, molding style, spring contacts	1	
2	30-00418	Wire, 2C TS, 24 AWG, UL2468, 300V, 80°C, 3.0 mm, VW-1, PVC, red and black	1	
3	24-00003	Overmold	1	

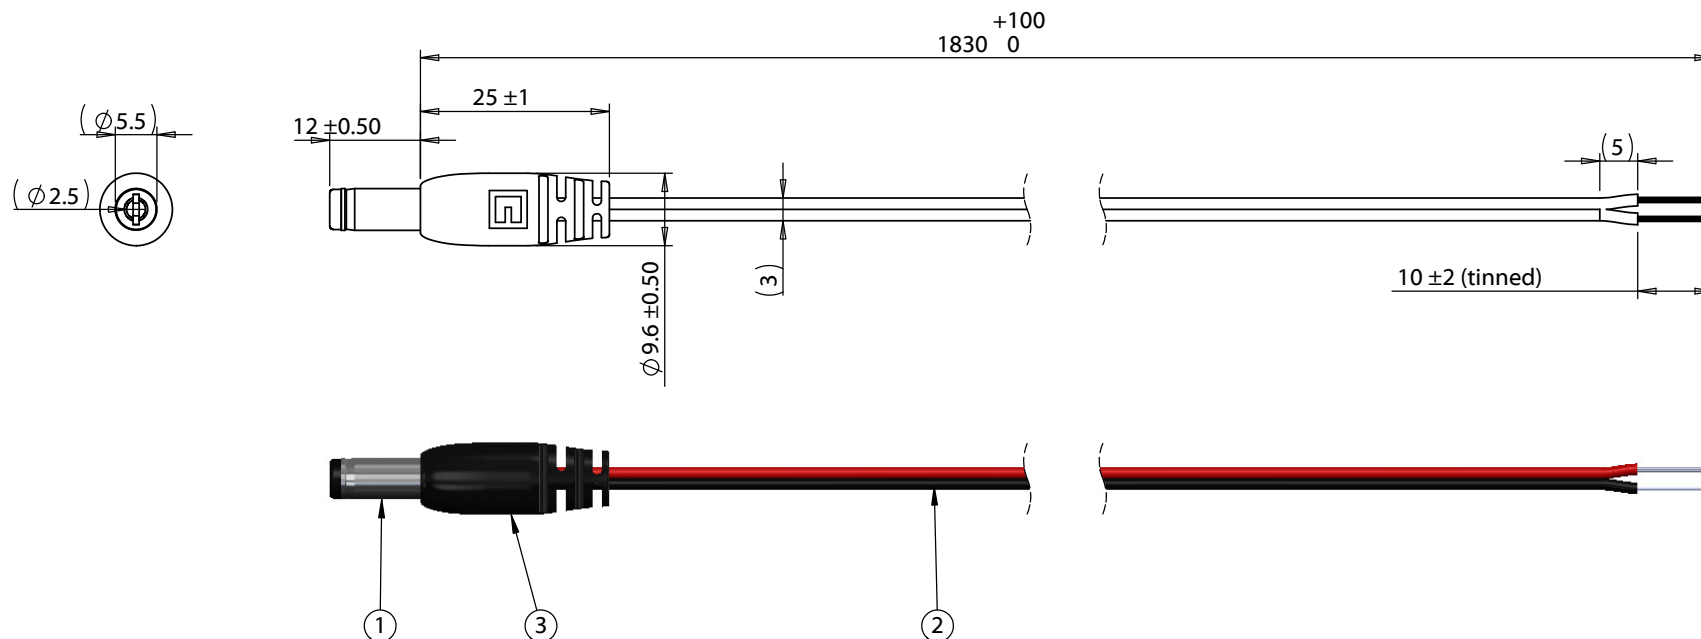

Notes:
Cable rated for 4.5 A, 48 V dc
Functionally equivalent components may be substituted

Wiring Diagram	
50-00026	Wire
Sleeve	Black
Center	Red

Revision:	Date:	Description:	Prepared:	Notes: RoHS compliant Function test: no open, no short circuit, no intermittent	TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com	
A	4/10/2015	Initial release	Verified:			
A1	4/30/2015	Updated notes section	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 1830 mm, 5.5x2.5x12 mm 50-00026 dc plug to stripped tinned, 24 AWG, 30-00418 R-B wire	Size:	Part number:
					A	10-01935
					Scale: 1:2	Sheet 1 of 1

5

↑

4

3

2

1