


| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. | COMPONENT NOTES |
|----------|-------------|--|------|-----------------|
| 1 | 50-00001 | Connector, dc plug, 3.5x1.1xL20 mm, molding style, spring contacts | 1 | |
| 2 | 30-00404 | Wire, 2C TS, 24 AWG, UL2468, 300V, 80C, 3.0 mm, VW-1, PVC, 87A | 1 | |
| 3 | 24-00002 | Overmold, PVC | 1 | black |

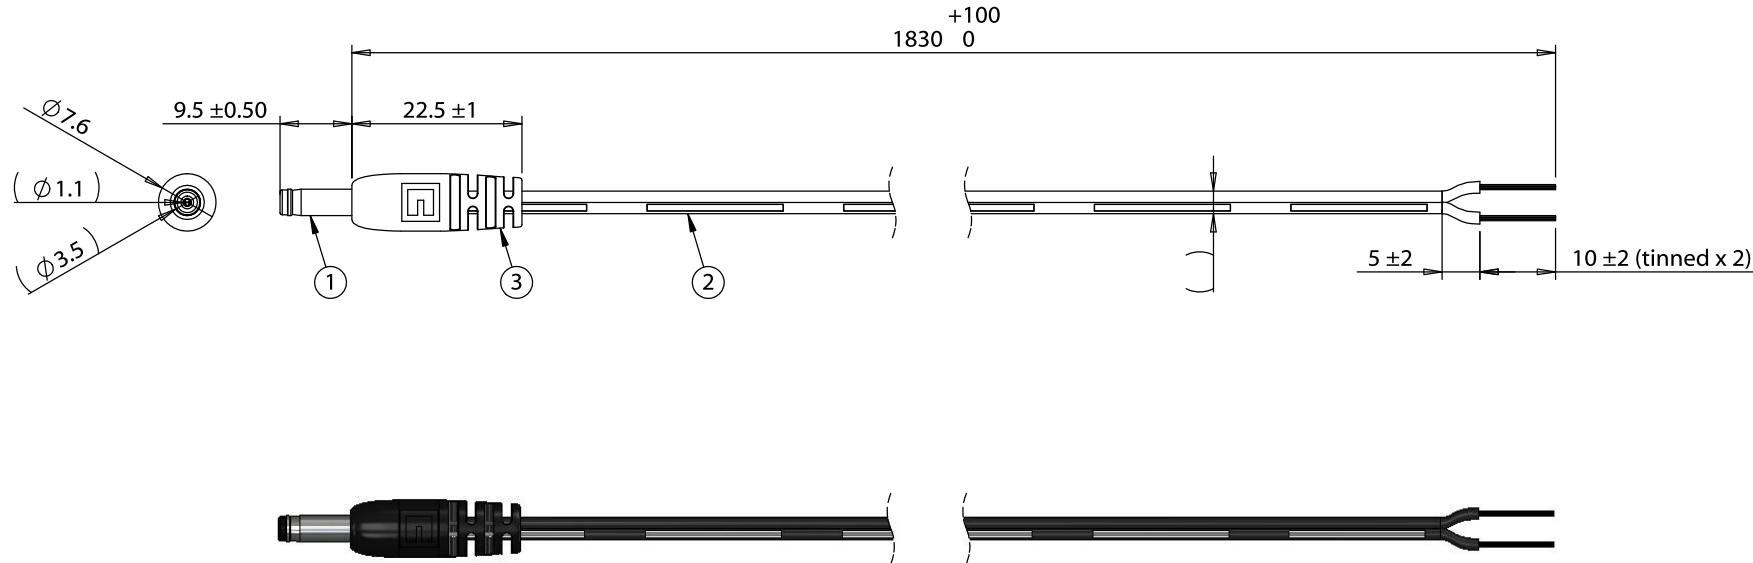

Notes:

Functionally equivalent components may be substituted

| Wiring Diagram | |
|----------------|-------------------|
| 50-00001 | wire color |
| center | black with stripe |
| sleeve | black |

| | | | | | |
|-----------|-----------|-----------------|--|--|--|
| Revision: | Date: | Description: | Prepared: AG <small>Digitally signed by AG Date: 2017.10.05 14:04:22 -07'00'</small> | Notes: RoHS compliant Function test: no open, no short circuit, no intermittent | TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com |
| A | 10/3/2017 | Initial release | Verified: GL <small>Digitally signed by GL Date: 2017.10.05 14:10:29 -07'00'</small> | Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm | Description: Cable, 1830 mm, 3.5x1.1x9.5 mm 50-00001 dc plug to 10 mm tinned, 24 AWG, UL2468, 30-00404 wire |
| | | | | | Size: A Part number: 10-02489 |
| | | | | | Scale: 1:1 Sheet 1 of 1 |