


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00993	Connector, 8 pin M12 X-code plug, 12xL38.6mm, gold plated, molding style, solder cup, IP67, shielded	1	
2	50-00995	Connector, 8P8C RJ45 plug, IDC, CAT6a, shielded	1	
3	30-01713	Wire, 4PR BC, 24 AWG, CAT6a SF/UTP, UL20387, 300V, 105C, 60C oil, UV, 7.2 mm, shielded, VW-1, PVC	1	
4	24-00363	Overmold, M12 X-code plug and jack, 180°	1	PVC, black, 60 °C oil and UV resistant
5	24-00362	Overmold, RJ45 plug	1	PVC, black, 60 °C oil and UV resistant

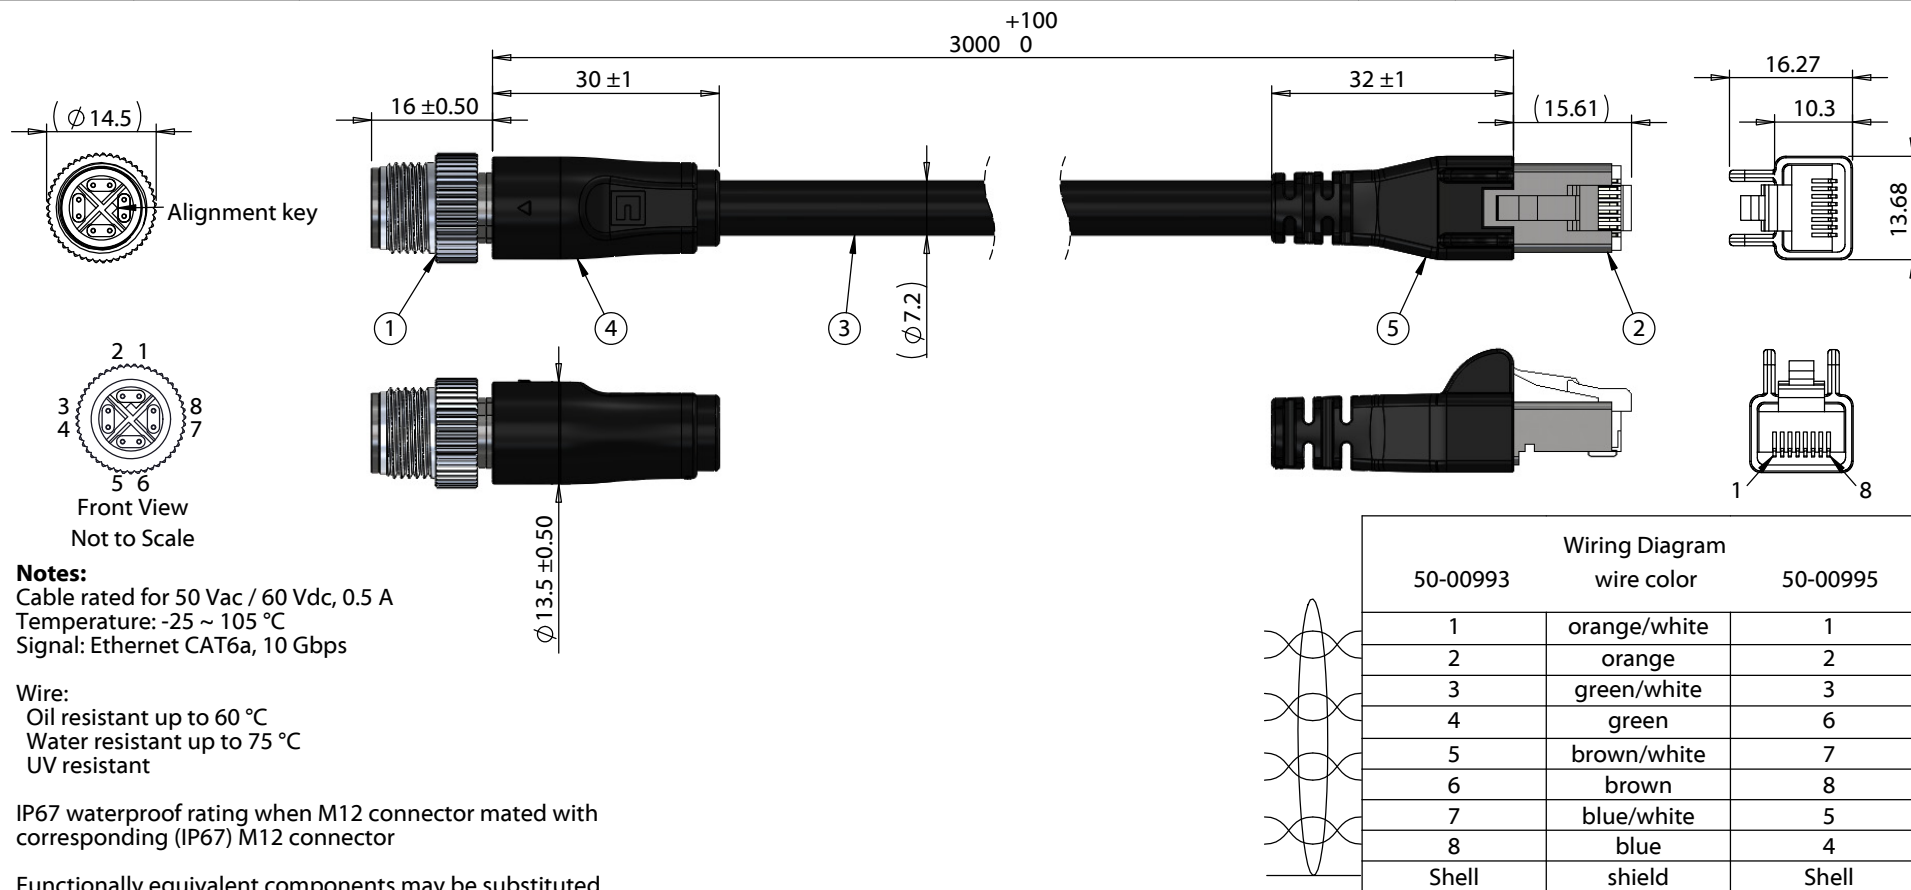

Revision:	Date:	Description:	Prepared:	Notes:	<div>TENSILITY</div> <div> tel 1.541.323.3228 800 877.670.7118  fax 1.541.323.4202 web tensility.com </div>	
A	5/19/2022	Initial release	Verified:	RoHS compliant		
			Dimensions are in millimeters.	Function test: no open, no short circuit, no intermittent	<div>Size: A</div> <div>Part number: 10-03963</div>	
			Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.3 mm	Description: Cable, 3000 mm, 8 pin 50-00993 M12 X-code plug to 8P8C 50-00995 RJ45 plug, CAT6a, 24 AWG, 30-01713		
					Scale: 1:1	Sheet 1 of 1