
					_
ITEM NO.	PART NUMBER	DESCRIPTION Connector, 4 pin M12 A-code socket, 12xL22mm, gold plated, molding style, solder cup, IP67, shielded		COMPONENT NOTES	
1	50-00980				1
2	50-00987	onnector, 4 pin M12 A-code plug, 12xL22mm, gold plated, molding style, solder cup, IP67, shielded			1
3	30-01578	Wire, 4C TS, 22 AWG, UL20387, 300V, 105C, 60C oil, UV, 6 mm, shielded, VW-1, PVC, 80A, black	1		1
4	24-00361	Overmold, M12 plug and jack, 90°	2	PVC, black	1

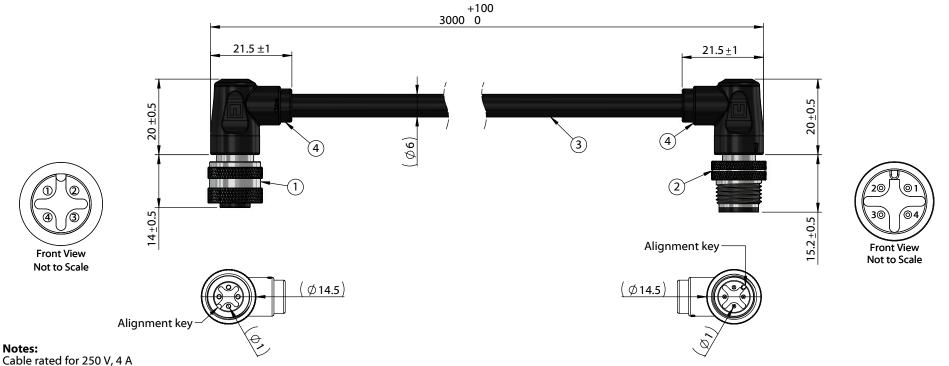

Cable rated for 250 V, 4 A
Temperature: -40 ~ 105 °C
Oil resistant up to 60 °C
Water resistant up to 75 °C
UV resistant

IP67 waterproof rating when mated with corresponding (IP67) connector

Functionally equivalent components may be substituted

Wiring Diagram								
50-00980	wire color	50-00987						
1	red	1						
2	yellow	2						
3	black	3						
4	white	4						
Shell	shield/drain	Shell						

Revision:	Date:	Description:	Prepared:	Notes:				
A 1:	12/30/2021	Initial release		RoHS compliant			ENSILITY	
			Verified: Dimensions are in	Function test: no open, no short circuit, no intermittent		tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com		
			millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 3000 mm, 1.0 mm 4C 90' socket to 1.0 mm 90° 50-00987 30-01578 wire		A 1	art number: 0-04982 1:1 Sheet 1 of	

5 3 2