


PART NO.	ENG. NO.	FINISHED LENGTH
1200705061	8R4J26E03C200	200CM [6FT 7IN]
1200705166	8R4J26E03C500	500CM [16FT 5IN]]

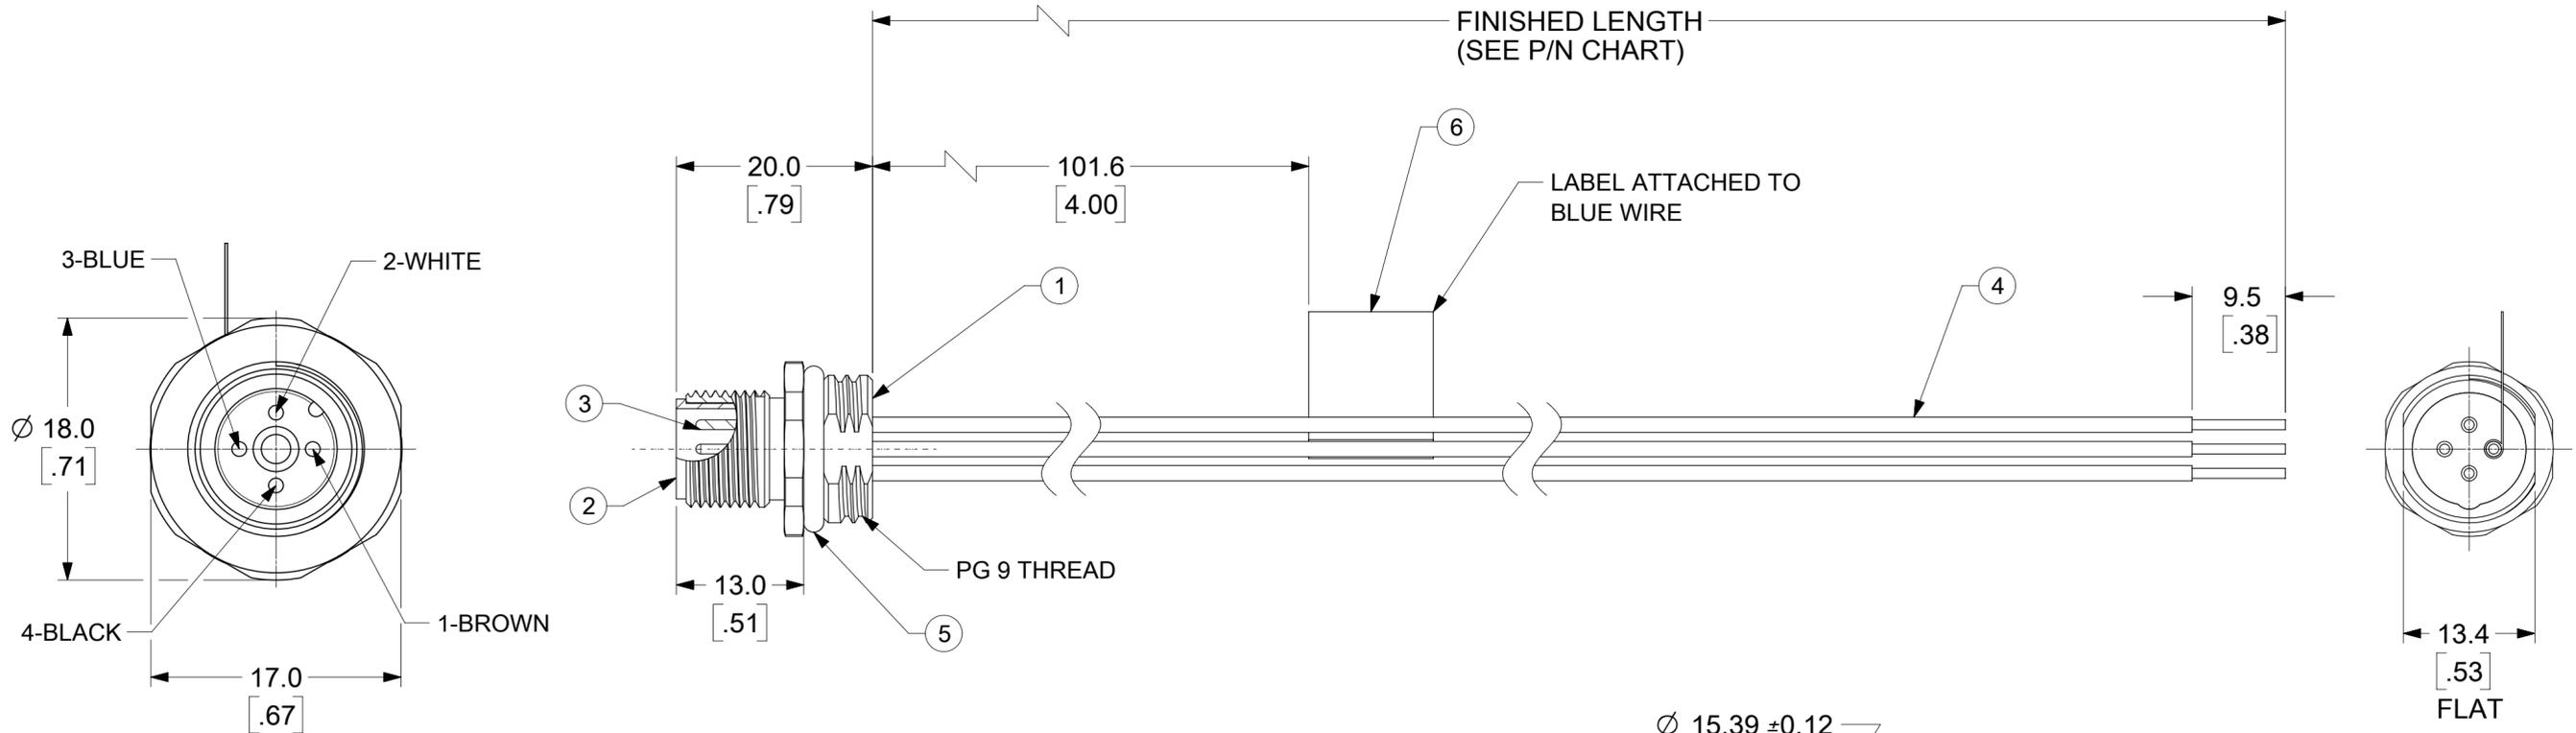

8R4J26E03C500

LENGTH

C010 = 1.0 CENTIMETER
C100 = 10 CENTIMETERS

PART NUMBER MATRIX

NOTES:

- MATERIAL: AS NOTED
- FINISH: AS NOTED
- ELECTRICAL:
VOLTAGE; 250V
CURRENT; 4A
- TEMP RATING: -25°TO +80°C
- PROTECTION: IP67 (WHEN MATED)
- COUPLING THREAD: M12 X 1.0
- UL RECOGNIZED FILE: E152210
- ALL DIMS ARE FOR REFERENCE UNLESS TOLERANCED OR NOTED OTHERWISE

CABLE LENGTH TOLERANCES			
>.3M [1FT]:	+19mm-0	[+.75in-0]	
.3 - .9M [1 - 3FT]:	+44.5mm-0	[+1.75in-0]	
.9 - 1.8M [3 - 6FT]:	+55.6mm-0	[+2.19in-0]	
1.8 - 3.7M [6 - 12FT]:	+88.9mm-0	[+3.50in-0]	
3.7 - 7.3M [12 - 24FT]:	+165.1mm-0	[+6.50in-0]	
7.3-14.6M [24 - 48FT]:	+317.5mm-0	[+12.50in-0]	
14.6 - 30.5M [48-100FT]:	+622.3mm-0	[+24.50in-0]	
OVER 30M [100FT]	+2% OF FINISHED LENGTH		

ITEM	DESCRIPTION	MATERIAL	FINISH
6	FLAG LABEL	VINYL	BLACK/YELLOW
5	O-RING (PANEL SEAL)	NBR	BLACK
4	WIRE, 22AWG (UL 1569)	PVC INSULATION	SEE FACE VIEW
3	CONTACT PIN	Cu ALLOY	GOLD PLATED
2	INSERT	PUR	BLACK
1	RECEPTACLE SHELL	BRASS	NICKEL PLATED

SYMBOLS									
▽ = 0	DIMENSION UNITS	SCALE	CURRENT REV DESC: INITIAL RELEASE						
▽ = 0	MM/INCH	2:1	EC NO: 624731 DRWN: RSTONE 2019/09/17 CHK'D: CCHRSTKA 2019/10/01 APPR: BWOODMAN 2019/10/09 INITIAL REVISION: DRWN: RSTONE 2019/09/17 APPR: BWOODMAN 2019/10/09						
▽ = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)								
▽ = 0	ANGULAR TOL	± °							
▽ = 0	4 PLACES	±							
▽ = 0	3 PLACES	±	PRODUCT CUSTOMER DRAWING DOCUMENT NUMBER: 1200705166 DOC TYPE: PSD DOC PART: 000 REVISION: A						
▽ = 0	2 PLACES	±							
▽ = 0	1 PLACE	±	MATERIAL NUMBER: SEE P/N CHART CUSTOMER: [] SHEET NUMBER: 1 OF 1						
▽ = 0	0 PLACES	±							
▽ = 0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES				
▽ = 0			C-SIZE	120070					