





1		2		3		4		5		6		7		8	
								REV.	ECN NO.	DATE	SIGN	DESCRIPTION			
								E	C210076	2021/01/14	Vicky	△ E X2			
								F	C210241	2021/04/13	Ruru	△ F X5			
								G	C221928	2022/12/20	Ruru	△ G X1			



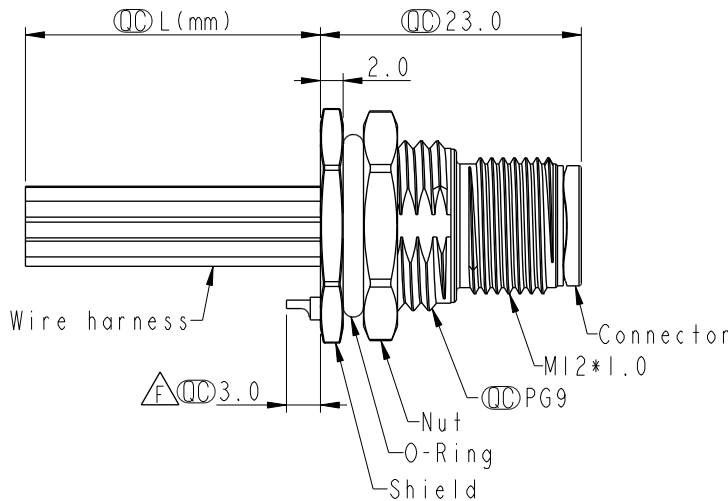


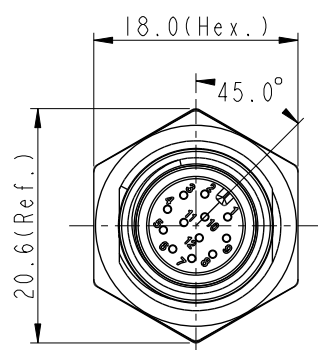



Recommended Panel Cut-Out

UNIT:mm



TOLERANCE

.X	±0.25
.XX	±0.1
.XXX	±0.05
ANGLES	±1°

TITLE N SEN, M12 A -SHLD, SCREW RECEPTACLE, M, M, SOLDER △ F		
SCALE 1:1	SIZE A4	SHEET 1 OF 2
REV. G	WC-REV. A.5	QC: Inspection item

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Vicky	DATE 2019-09-24
DWG NO △ MSAS-XXPMMS-SF8BX	CHECKED BY Rita	DATE 2019-09-24
CUSTOMER ALTW	APPROVED BY Max	DATE 2019-09-24

Note: △ B △ C △ D △ E △ F

- * RoHS Compliant
- * Ⓞ Important dimension
- △ * Waterproof rate: IP68, unmated 1m/24h
IP69K, unmated
- * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
- * Shield: Metal
- * Nut: Metal
- * O-Ring: Rubber, Black
- * Wire harness: UL1061
- * For panel thickness max: 4.5mm
- * O-Ring and nut are assembled on connectors
- * Wire harness tolerance: 100mm: ±10mm
100mm < L ≤ 300mm: ±15mm
300mm < L ≤ 1000mm: ±20mm
1000mm < L ≤ 1500mm: ±50mm

1

2

3

4

5

6

7

8

W10814-03-BW01A2

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

F
E
D
C
B
A



F
E
D
C
B
A



F
E
D
C
B
A

F
E
D
C
B
A

F
E
D
C
B
A