


TOLERANCE UNLESS OTHERWISE SPECIFIED	
.X	±0.15

THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	
ORIGINAL	①
ADD NOTE 5	
P.M.	AUG.9/2023 ②

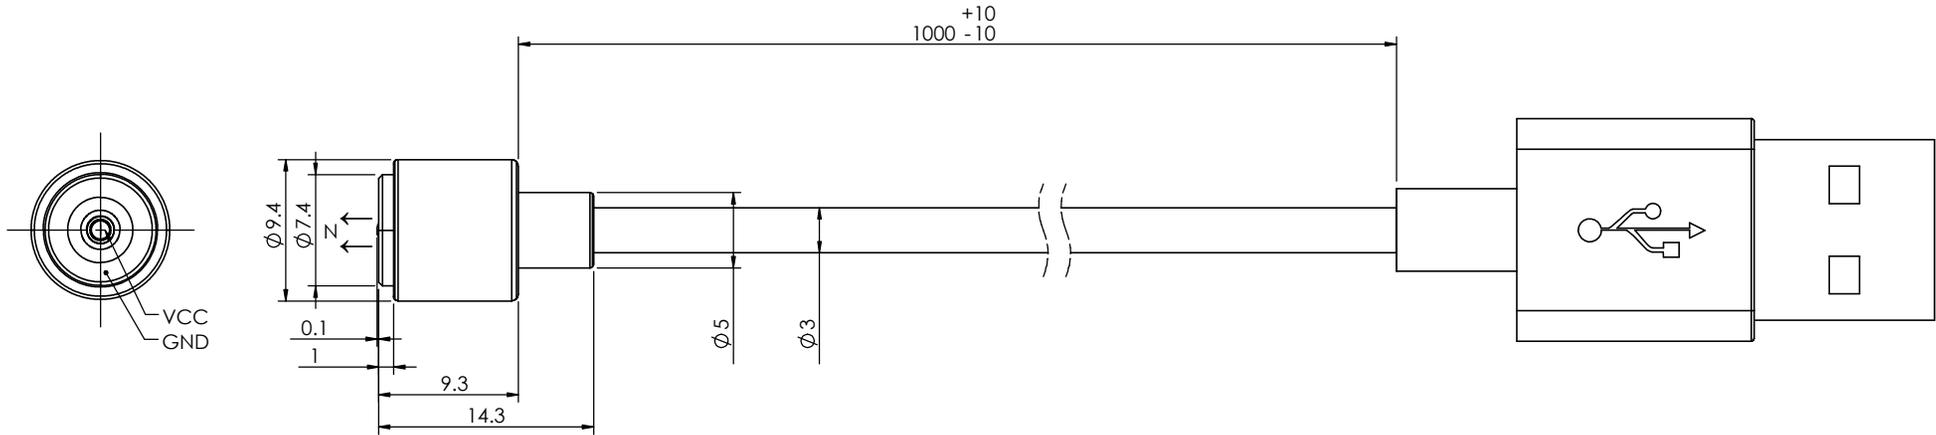

SPECIFICATION:

- 1- MATERIAL:
 - CONTACT: BRASS, GOLD FLASH PLATING ALL OVER NICKEL UNDERPLATING
 - SPRING: SUS
 - HOUSING :TPE, WHITE
 - MAGNET : N52
 - CABLE: TPE, OD3.0
- 2- ELECTRICAL:
 - RATED VOLTAGE (PER CONTACT): 5V
 - RATED CURRENT (PER CONTACT): 2A
- 3- RECOMMENDED WORKING STROKE & FORCE: STROKE 0.8mm (PER CONTACT) 60gf MAX.
- MECHANICAL LIFE: 10,000 CYCLES MIN.
- 4- WORKING TEMPERATURE RANGE: -30~+85°C.
- 5- MATING WITH: 686C02222030C1E

**MAGNETIC SPRING LOADED CONNECTOR TO
USB-A CABLE ASSEMBLY, 2POS, MALE**

ACAD REFERENCE NO.:	687C0222A000C00	UNIT: MM
DRAWN:	J.L.	DATE: 2023-04-13
CHECKED:	R.S.M	DATE: 2023-04-13
SCALE:	(IN CAD 1:1)	SHEET 1 OF 1
DRAWING NUMBER:	687C0222A000C00	ISSUE
PART NUMBER:	687C0222A000C00	2



THIS SERIES FULLY CONFORMS TO
THE EUROPEAN UNION DIRECTIVES
2011/65/EU FOR RoHS COMPLIANCY.



YOUR CONNECTION TO QUALITY & SERVICE

EDAC INC
TORONTO, ONTARIO
CANADA

THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF EDAC INC., AND
SHALL NOT BE REPRODUCED, OR COPIED
OR USED AS THE BASIS FOR THE
MANUFACTURE OR SALE OF APPARATUS
WITHOUT WRITTEN PERMISSION.