REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN1510301~304	2015/01/08	Sam	Update logo
D	C210636	2021/04/23	Vicky	D X8
E	C221880	2022/12/06	Vicky	E X1

B

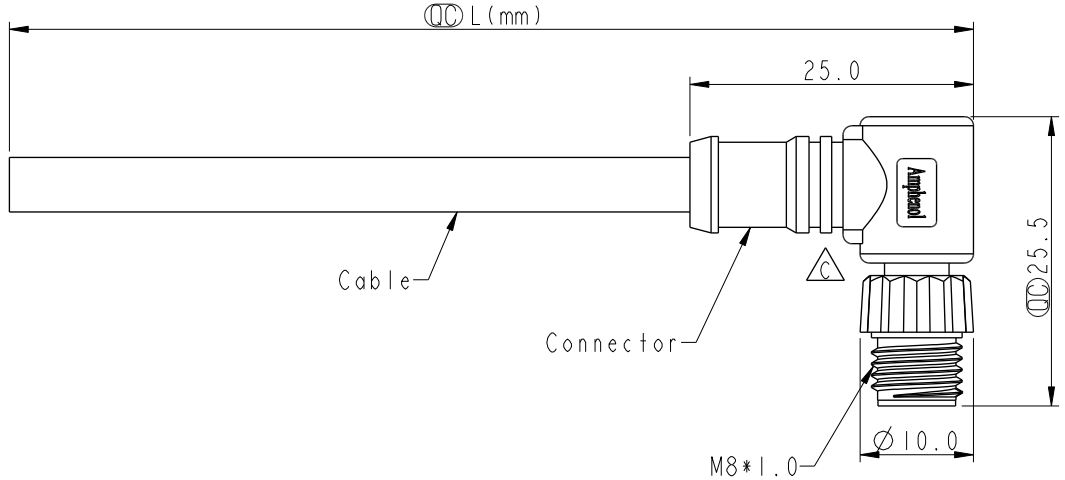

Conn.

D Note:
* RoHS Compliant
* QC Important dimension
E * Waterproof rate: IP67, mated
* Connector
  Housing: Thermoplastic, Black
  Pin: Copper alloy, Gold plated
  Nut: Thermoplastic, Black
  Outer mold: Thermoplastic, Black
* Cable: PU Jacket, Black
B * Cable length tolerance: 1M: +50/-0 mm
  1M < L ≦ 3M: +100/-0 mm
  3M < L ≦ 5M: +150/-0 mm
  5M < L ≦ 10M: ±100 mm
  10M < L ≦ 20M: ±200 mm
  20M < L ≦ 30M: ±300 mm
  30M < L ≦ 99M: ±500 mm

UNIT: mm	TITLE: O SEN, M8 PLASTIC CABLE W/O SR, M, M, MOLDING (B D)		ITEM NO	DRAWN BY: Sam	DATE: 2015-01-08
TOLERANCE: ±0.5mm	SCALE: 3:2	SIZE: A4	SHEET 1 OF 2	DWG NO: D 8P-XXBMMM-SR7BXX	CHECKED BY: Vicky	DATE: 2015-01-08
	REV.: E	WC-REV.: A.1	QC: Inspection item	CUSTOMER: ALTW	APPROVED BY: Rita	DATE: 2015-01-08

Amphenol LTW
安費諾亮泰企業股份有限公司

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

Contacts	Cable OD	AWG	Item No.
4P	4.8	22	8P-04BMMM-SR7BXX
3P	4.5		8P-03BMMM-SR7BXX

D

D 8P-XXBMMM-SR7BXX

XX: No. Of Pin

XX:01~99Meters
01:01Meter
02:02Meters
:
99:99Meters

Pin Out	3P	4P
	4 Black 黑 3 Blue 藍 1 Brown 棕 Pin # Wire	4 Black 黑 3 Blue 藍 2 White 白 1 Brown 棕 Pin # Wire
Conn.		

D Pin Assignments Front View

UNIT:mm

TOLERANCE ±0.5mm

TITLE: O SEN, M8 PLASTIC CABLE W/O SR, M, M, MOLDING (B D)

SCALE 3:2 | SIZE A4 | SHEET 2 OF 2

REV. E | WC-REV. A.1 | QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY: Sam	DATE: 2015-01-08
DWG NO: D 8P-XXBMMM-SR7BXX	CHECKED BY: Vicky	DATE: 2015-01-08
CUSTOMER: ALTW	APPROVED BY: Rita	DATE: 2015-01-08

WI0814-03-RW01A2

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.