



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
E	LEN1710110~15	2017/01/17	Ruru	Change Logo
F	C230494	2023/04/14	Ruru	△X4
G	C231431	2023/11/13	Vicky	△GX1

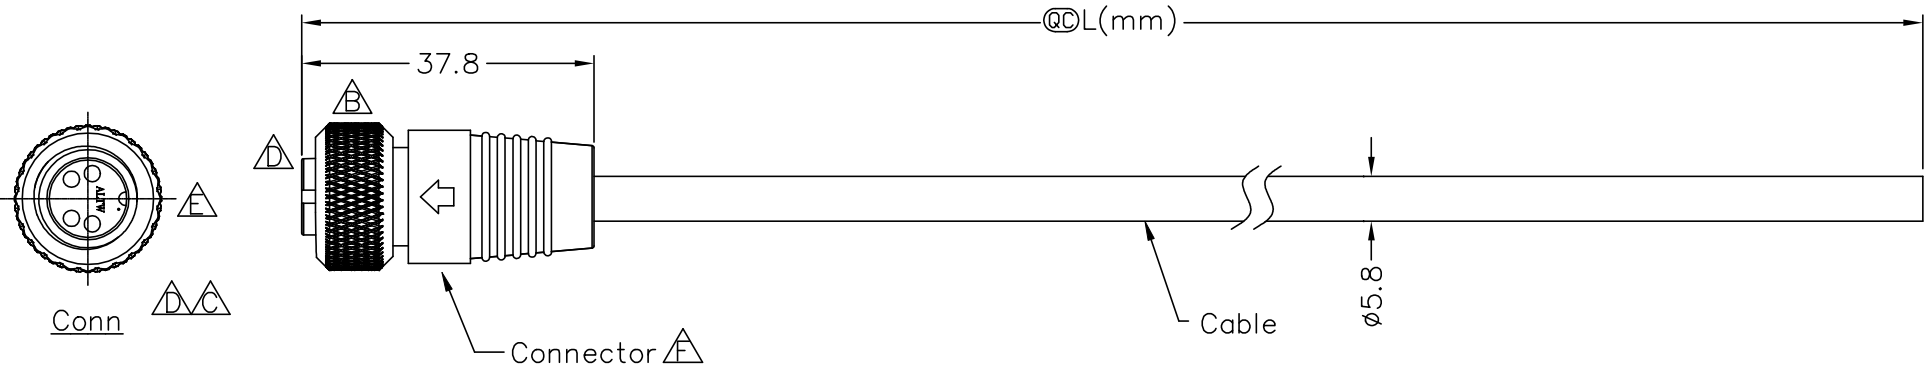


BSD-04BFFM-SL6AXX

XX: 01~99Meter
01: 01Meter
02: 02Meters
:
99: 99Meters

Cable Length(L): 01~99Meters

- △ Note:
- * @ Important Dimension
 - * Waterproof Rate: IP66, mated
 - * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper Alloy, Gold Plated
 - Nut: Metal
 - Shell: Metal
 - O-Ring: Rubber, Black
 - △* Cable: UL2464 24AWG*4C+Drain+Al/My, PVC Jacket UV Resistant, OD=5.8mm, Black
 - △△* Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm
06M~10M: ±100mm
11M~30M: ±200mm
31M~99M: ±500mm



Pin Assignments
Front View

Shield	Drain	地線
4	Yellow	黃
3	Red	紅
2	Green	綠
1	White	白
Conn	Wire Color	
Pin Out		

UNIT: mm	TOLERANCE		TITLE	
±0.5mm			0 CERES, B SHLD-5A, 04P, CABLE W/O SR F, F, MOLDING, SCREW	
SCALE	Free	SHEET	1	OF 1
REV.	G	SIZE	A4	@ : Inspection Item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE
BSD-04BFFM-SL6AXX	Vicky	2023/11/13
ALTW	Rita	2023/11/13
	Fred	2023/11/13

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.