

**Cat6 Unshielded Ethernet Network Cable,  
Slim, Clear-booted, Black, 1ft.**

**RoHS  
Compliant**

Stock No.: CAT6-0011SC

## FEATURES

- Strain Relief
- UTP
- 28 AWG
- Stranded Copper




## Product Description

Slim Cat6 UTP patch cables are designed for high density environments where space is a premium. Ultra-slim 0.149-inch diameter 28AWG cable and narrow boot design reduces congestion and simplifies moves, additions, and changes.

## General Specifications


Attribute	Value
Terminated/Unterminated	Terminated
Connector Type	RJ45
Cable Type	Ethernet
Length	0.3048m
Gauge	28 AWG
Conductor	Bare Copper
Shield/Unshielded	Unshielded
Voltage Rating	30V
1.0 - 550MHz Impedance ( $\Omega$ )	100 $\pm$ 15
Maximum Operating Frequency	550MHz
Operating & Storage Temp.	-40°C to 60°C   -40°F to 140°F
Installation Temp.	-20°C to 60°C   -4°F to 140°F
Jacket Color	Black

## Product Drawing

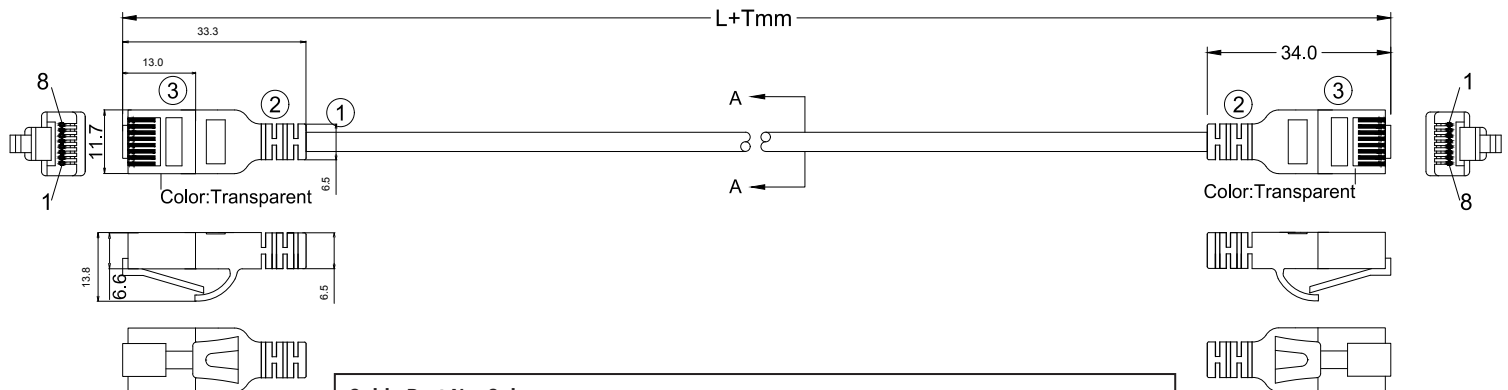

### Cable Part No. Color

White = WT	Gray = GY	Black = BK	Blue = BL	Green = GN
Purple = PU	Yellow = YW	Orange = OR	Red = RD	

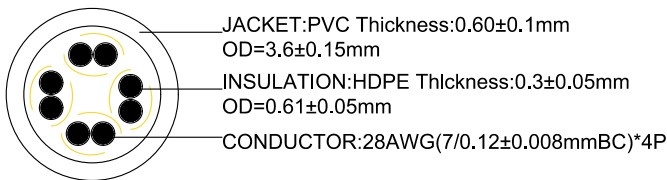

SEC:A-A

orange 1	green 2
white/orange	white/orange
blue 3	brown 4
white/blue	white/brown

PINOUT		
P1	WIRE	P2
1	WHITE/ORANGE	1
2	ORANGE	2
3	WHITE/GREEN	3
6	GREEN	6
5	WHITE/BLUE	5
4	BLUE	4
7	WHITE/BROWN	7
8	BROWN	8

③	RJ45 PLUG	8P8C 50U" GOLD PLATED TWO-PIECE PLUG.		
②	MOLDED	PVC SHORT MOLDED BOOT		
①	CABLE	UTP 4P/28AWG(7/0.12±0.008MM BC) OD=3.6±0.15mm		
NO	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT

Dimensions: Millimeters (Inches)

### Part Number Table

Part Number	Description
CAT6-0001SC	Cat6 Unshielded Ethernet Network Cable, Slim, Clear-booted, Black, 0.5ft.
CAT6-0011SC	Cat6 Unshielded Ethernet Network Cable, Slim, Clear-booted, Black, 1ft.
CAT6-0031SC	Cat6 Unshielded Ethernet Network Cable, Slim, Clear-booted, Black, 3ft.
CAT6-0071SC	Cat6 Unshielded Ethernet Network Cable, Slim, Clear-booted, Black, 7ft.
CAT6-0101SC	Cat6 Unshielded Ethernet Network Cable, Slim, Clear-booted, Black, 10ft.
CAT6-0141SC	Cat6 Unshielded Ethernet Network Cable, Slim, Clear-booted, Black, 14ft.

Important Notice: This data sheet and its contents (the "Information") belong to the members of the EASE group of companies (the "Group") or are licensed to it. No license is granted for the use of it other than for information purposes in connection with the products to which it relates. No license of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate, but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. EASE is the registered trademark of Ease Electronics Co., Limited 2019.