


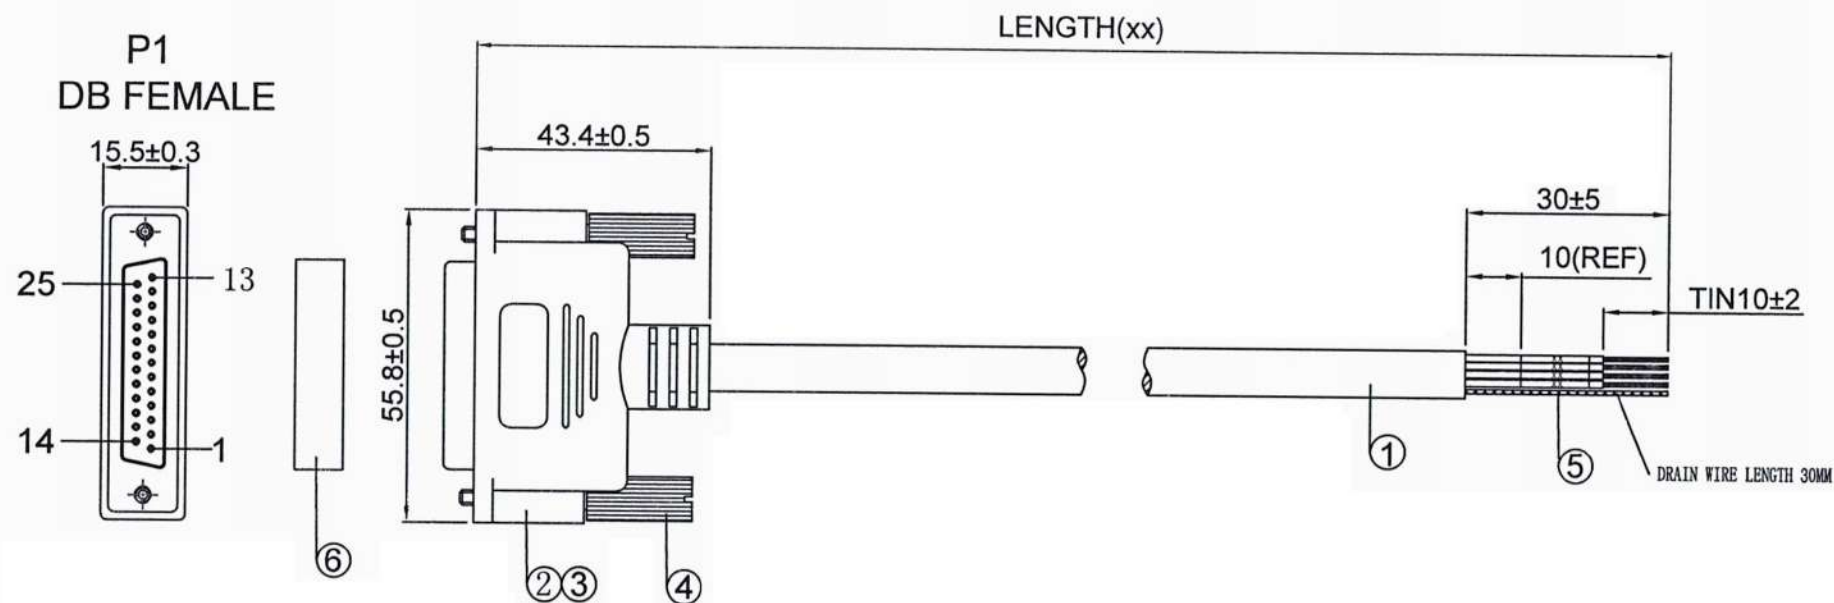

CUSTOMER P/N:	COLOR	LENGTH(xx)
DBC-25FW-05	BLACK	1525+30/-10mm
DBC-25FW-10	BLACK	3050+30/-10mm
DBC-25FW-15	BLACK	4575+40/-10mm
DBC-25FW-25	BLACK	7625+80/-10mm
DBC-25FW-35	BLACK	10675+80/-10mm

PINOUT:

P1 COLOR LABEL	P1 COLOR LABEL
1 BLACK P1	14 BROWN/BLACK P14
2 BROWN P2	15 RED/BLACK P15
3 RED P3	16 ORANGE/BLACK P16
4 ORANGE P4	17 YELLOW/BLACK P17
5 YELLOW P5	18 GREEN/BLACK P18
6 GREEN P6	19 BLUE/BLACK P19
7 BLUE P7	20 PURPLE/BLACK P20
8 PURPLE P8	21 GRAY/BLACK P21
9 GRAY P9	22 WHITE/BLACK P22
10 WHITE P10	23 PINK/BLACK P23
11 PINK P11	24 LIGHT GREEN/BLACK P24
12 LIGHT GREEN P12	25 LIGHT BLUE/BLACK P25
13 LIGHT BLUE P13	Shell DRAIN

SPEC:

- UL 2464 28AWG*25C+DRAIN+AL JACKET BLACK IN COLOR OD:6.5mm
- DB 25P FEMALE TYPE BLACK COLOR SHELL NICKEL PLATED
- MOLDING PVC(UL94-V0) BLACK IN COLOR
- MOLDING SCREW 4-40UNC 4*38.5mm
- HEAT SHRINK TUBE LABEL WHITE IN COLOR L=15MM
- DUST CAP

REV	DATE	DESCRIPTION	DRAWN BY	CHECKED BY	SALES	APPROVAL BY				SHEET NO.
A/1	2023.03.13		2023.4.2	2023.4.2	milan	2023.4.2	CompuCableUSA	P/N: DBC-25FW**		1/1
			SCALE:	UNIT:MM	DATE: 2023.03.29					