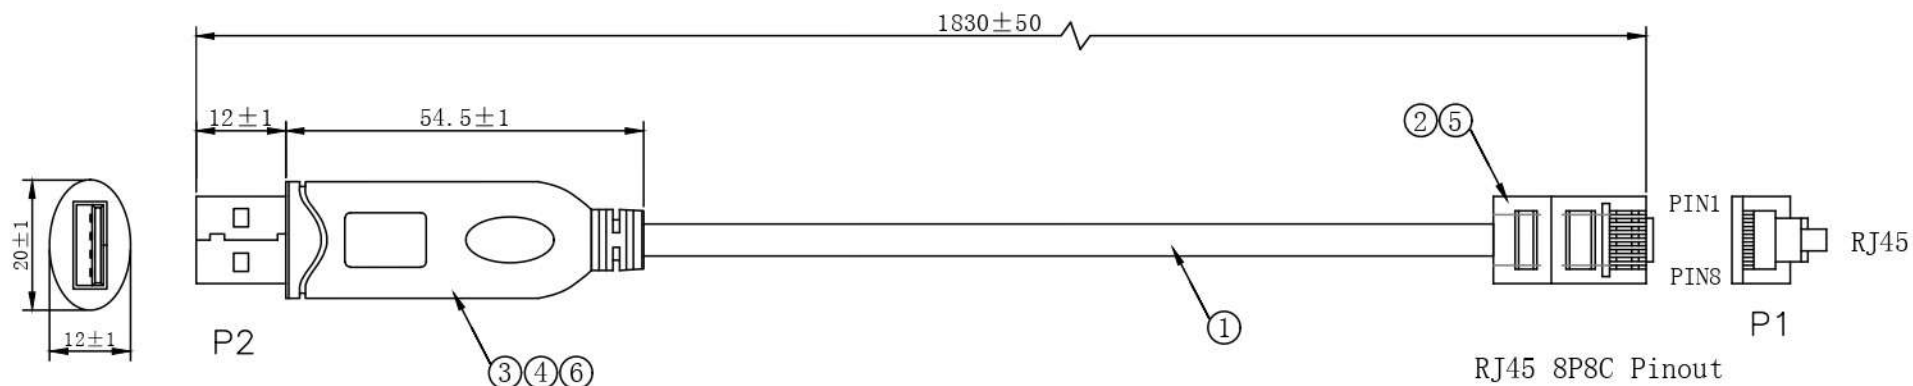


P1	P2
PIN1	1 CTS
PIN2	2 DSR
PIN3	3 RXD
PIN4	4 GND
PIN5	5 GND
PIN6	6 TXD
PIN7	7 DTR
PIN8	8 RTS

NOTE:

- 1.100%断路，开路，短路测试
- 2.导通阻抗小于3 ohm
- 3.绝缘阻抗大于2M ohm，300V
- 4.100% 功能测试。

6	塑胶	45P PVC, BLUE, 94V-1, MOLDED, ROHS	1	PCS
5	塑胶	LDPE, 本色, MOLDED, ROHS	A/R	G
4	插头	USB TYPE A MALE, PIN 镀金1u, ROHS	1	PCS
3	PCB板	PCBA WITH FT232+ZT213 CHIP, ROHS	1	PCS
2	连接器	RJ45 MALE, 8P8C, PIN 镀金1u, 透明PC水晶头	1	PCS
1	线材	28AWG*8C, BARE COPPER, BLUE PVC JACKET, ROHS	A/R	M
NO	NAME	Description	QTY	Unit

A	INITIAL RELEASE			13/03/02		
REV	DESCRIPTION OF CHANGE				DATE	
TOLERANCE INCHES			M/M	CompuCableUSA		
.X	.015	.30				
.XX	.010	.10				
.XXX	.005	.05				
DRAWN BY	TONY CHAN	SCALE	NONE		REV	A
		UNIT	MM			
CHECK BY		SHEET	1 / 1	CUSTOMER:		
		DATE	22/12/6	DWG NO.:		
		TITLE: USB TO RJ45				
P/N:	DBM-U2RM-06BLU		Product Name : USB 2.0 Type A Male to RJ45 Male 8P8C Console Cable Periwinkle Blue 6 Feet			