



**PROPRIETARY INFORMATION:**  
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR  
 USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY  
 PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS.5619, DMR	02/25/05	DMR

'A'

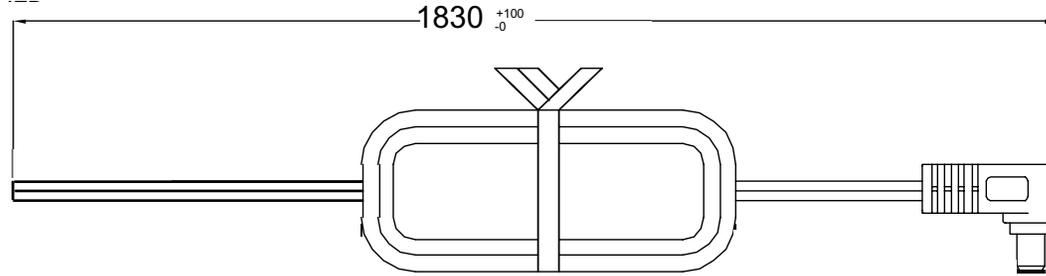

'B'



**GENERAL SPECIFICATIONS:**

CABLE TYPE / SIZE: # 2468, 20 AWG X 2, FLAT CABLE  
 TEMPERATURE RATING: 60° C MIN.  
 CABLE JACKET COLOR: BLACK  
 POLARITY: IDENTIFIED CONDUCTOR (STRIPE OR RIB)  
 IS TO BE CONNECTED TO OUTSIDE OF BARREL.  
 OVERALL LENGTH (L): 1830 ± 20 MM ( 6 Ft )  
 CABLE OUTER DIAMETER: 2.7 x 5.4 ± 0.2 MM  
 END 'A' TERMINATION: CUT BLUNT  
 END 'B' TERMINATION: RIGHT ANGLE FEMALE BARREL 5.5 x 2.5 x 12 mm

**RELEASED**  
 By pudxc at 11:42 am, May 27, 2021

**NOTES:**

- CORD MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).

**PACKING:**

BULK PACKED, BUNDLES OF 25.  
 MAXIMUM SHIPPING CARTON WEIGHT IS 30 KG.



DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
<b>TABULATION BLOCK</b>				
		<b>TOLERANCES:</b> DECIMALS ANGULAR .xx +/- 0.1 +/- 1° .xxx +/- .005		<b>GlobTek, Inc.</b> www.globtek.com 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111
		<b>MILLIMETERS ANGULAR</b> .xx +/- 0.3 +/- 1° .xxx +/- .013		
INIT.BY: DMR	DATE: 02/25/05	DWG TITLE: LOW VOLTAGE DC CORDSET		
DRAWN: NF	DATE: 02/25/05	FSCN No.: G, CC	SIZE: A	REV. A
APRVD: DMR	DATE: 02/25/05	SCALE: NONE	PART NO: <b>LRA1806F00-JP</b>	SHEET 1/1

Foot Note:  
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

Limitation of Use:  
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice