


Assembly Specifications	
Temp Rating	-20 to 80 C
Max Voltage	30V
Max Current	3A
IP Protection	IP 67
Length (L)	40in / 1017mm
Tolerance	+2.0in -2.0in

Wiring Schematic		
A Pin #	Conductor Color	B Pin #
1	Black	1
2	Red	2
3	Blue	3
4	Orange	4
5		5
6		6
7		7
8		8
Shield	Attached	Shield

Cable Specifications	
Cable Jacket	PVC
Cable OD	0.19in / 4.8mm
No./Gauge	M46B-424
Conductor Jacket	PVC
Shielding	Yes

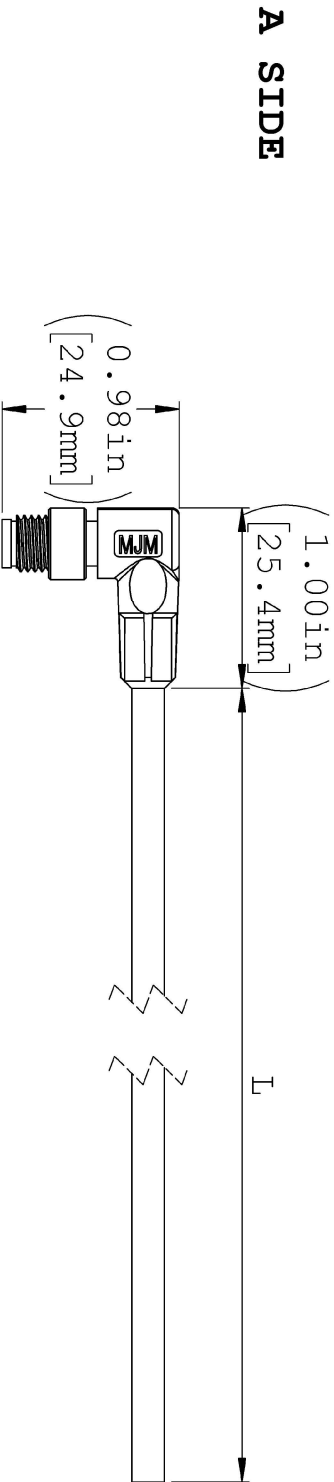

A SIDE

B SIDE

A Side Pin	B Side Pin
4 3 2 1	

## Notes

- 1) Connector pin view is from front of connector
- 2) Not for interrupting current
- 3) Some options and features may not be shown
- 4) Additional technical details available upon request; Consult Factory
- 5) Dimension in parentheses are for reference only



Date Gen: 4/17/24

REV	BY	DATE	DESCRIPTION
0	MMG	01/04/22	Initial Release
1	MMG	03/16/22	Production Release

**MJM Industries**

1200 East St, Fairport, OHIO 44077

PH: (440) 350-1230 [www.mjmindustries.com](http://www.mjmindustries.com)

Part Number:

**M08A04M9-0040B-X01**

Description:

M08 A Coded 4 Position Male 90 to Blunt Cut with

40in of PVC Cable

Tolerance Unless  
Otherwise Specified  
0.00 = +/- 0.13  
0.000 = +/- 0.050  
ANGLES = +/- 5  
Secondary Unit for  
Reference Only