


Assembly Specifications	
Temp Rating	-20 to 80 C
Max Voltage	30V
Max Current	3A
IP Protection	IP 67
Length (L)	197in / 5004mm
Tolerance	+4.0in -4.0in

Wiring Schematic		
A Pin #	Conductor Color	B Pin #
1	Black	1
2	Red	2
3	Blue	3
4	Orange	4
5		5
6		6
7		7
8		8
Shield	Attached	Shield

Cable Specifications	
Cable Jacket	PVC
Cable OD	0.19in / 4.8mm
No./Gauge	M46B-424
Conductor Jacket	PVC
Shielding	Yes

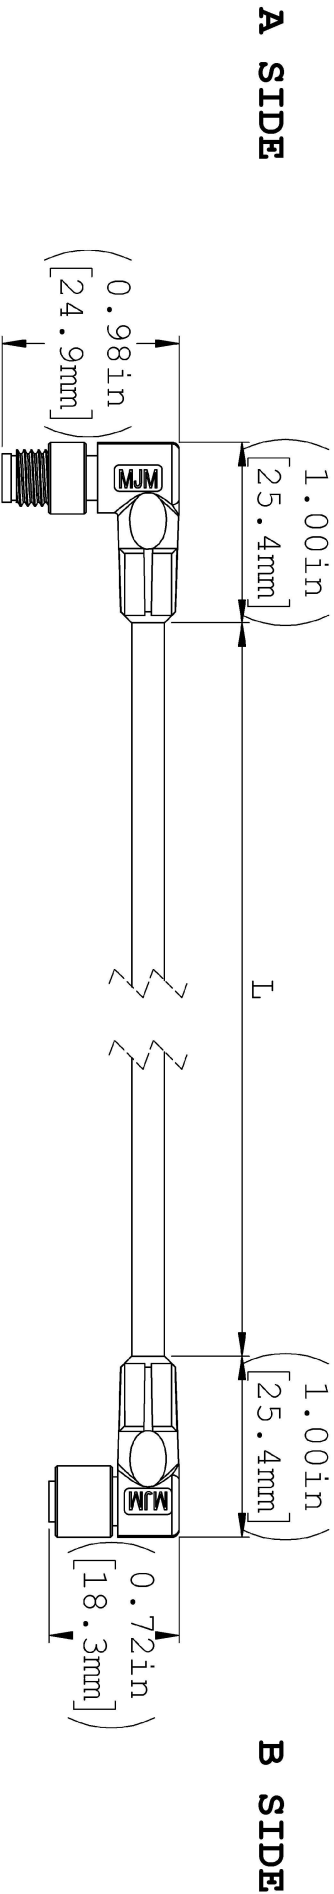

A Side Pin	B Side Pin

Assembly Specifications	
Temp Rating	-20 to 80 C
Max Voltage	30V
Max Current	3A
IP Protection	IP 67
Length (L)	197in / 5004mm
Tolerance	+4.0in -4.0in

Wiring Schematic		
A Pin #	Conductor Color	B Pin #
1	Black	1
2	Red	2
3	Blue	3
4	Orange	4
5		5
6		6
7		7
8		8
Shield	Attached	Shield

Cable Specifications	
Cable Jacket	PVC
Cable OD	0.19in / 4.8mm
No./Gauge	M46B-424
Conductor Jacket	PVC
Shielding	Yes

Notes

- Connector pin view is from front of connector
- Not for interrupting current
- Some options and features may not be shown
- Additional technical details available upon request; Consult Factory
- Dimension in parentheses are for reference only



Date Gen: 4/18/24

REV	BY	DATE	DESCRIPTION	Tolerance Unless Otherwise Specified
0	MMG	01/04/22	Initial Release	0.00 = +/- 0.13
1	MMG	03/16/22	Production Release	0.000 = +/- 0.050
				ANGLES = +/- 5
				Secondary Unit for Reference Only



1200 East St, Fairport, OHIO 44077

PH: (440) 350-1230 www.mjmindustries.com

Part Number:

M08A04M9-0197B-M08A04F9

Description:

M08 A Coded 4 Position Male 90 to M08 A Coded 4

Position Female 90 with 197in of PVC Cable