


REV.	DESCRIPTION	DRAWN	DATE
1	Initial release	TIM	2025/01/10
2	Initial release	TIM	2025/01/16

NOTES:

1. All cable 100% testing, any open, mis-wiring, short & intermittent are not permitted
2. RoHS compliance

PRODUCT NUMBER	L
M12-8R00-2427004	2000±30mm
M12-8R00-2427004A	200±10mm

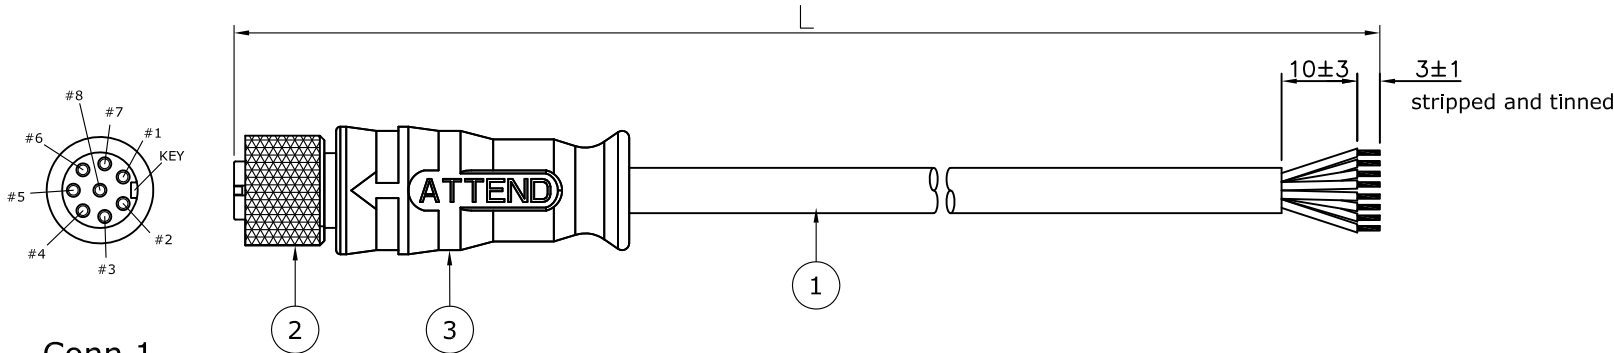

PIN ASSIGNMENT

Conn.1

1	Black
2	Orange
3	Brown
4	Red
5	Yellow
6	Green
7	Blue
8	Purple
	Braid



Shell

3	xg	Over Mold, TPU, Black
2	1PC	CONN, M12 A-Code 8Pin Female, PN:216A-08FO0
1	1PC	Cable, UL20549 8C*24#+AL/ML+Braid , OD6.0, TPU ,Bk
NO. Q'ty		DESCRIPTION
UNLESS OTHERWISE SPECIFIED TOLERANCE		
UNIT:	1~10 ±1 11~30 ±2 31~50 ±3 51~200 ±5	>401 ±10 ANGLE ±5°
mm		
DRAWN	Tim	2024/07/17
CHECKED	Allen	2024/07/17
APPROVED	Eunice	2024/07/17
SCALE	N/A	SHEET 1/1
SIZE	A4	PRODUCT NO. M12-8R00-2427004X



ATTEND

www.attend.com.tw

DRAWN NAME:
M12 A-Code 8Pin Female to Open Cable
L=XX

CUSTOMER NO.