





THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C190517	2019/04/11	Vicky	Change Note

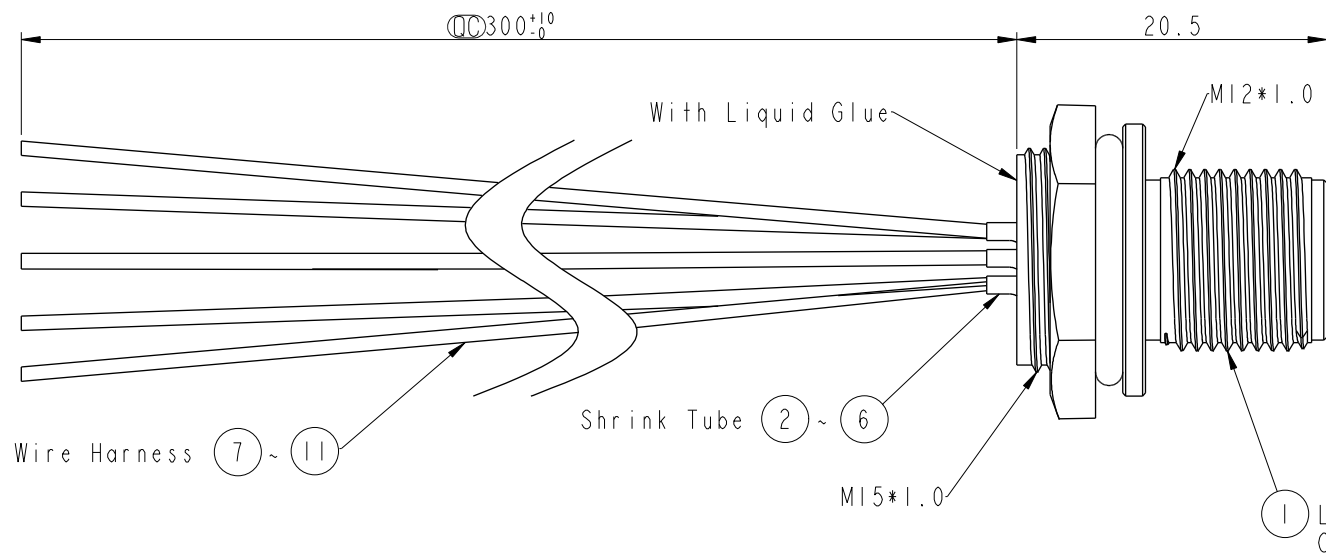


Conn.

1 LTWM12P-05PMMS-SC
Color: Black



Pin Assignments
Front View

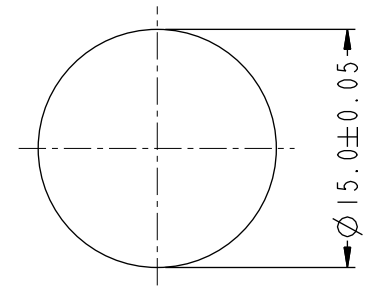

Recommended Panel Cut-Out

5	Blue (24AWG)	藍
4	White (24AWG)	白
3	Black (22AWG)	黑
2	Red (22AWG)	紅
1	Green (22AWG)	綠
Conn.	Wire Color	
	Pin Out	

- Note:
- * $\varnothing$ Important Dimension.
 - * Waterproof Rate: IP68, Unmated. In 1 meter water within 24 hours
 - * Connector: Thermoplastic, Black.
 - * Pin: Copper Alloy, Gold Plated.
 - * O-Ring: Rubber, Black.
 - * Nut: Thermoplastic, Black.
 - * Panel Thickness Max: 2.2mm

UNIT:mm		TITLE		ITEM NO		DRAWN BY		DATE	
		M12 Conn NMEA		MCP-05PMMS-SC8001		Vicky		2019-04-11	
		Panel Screw 5Pin M Conn M Pin		DWG NO		CHECKED BY		DATE	
				MCP-05PMMS-SC8001		Rita		2019-04-11	
				CUSTOMER		APPROVED BY		DATE	
				ALTW		Max		2019-04-11	

Amphenol LTW
安費諾亮泰企業股份有限公司