
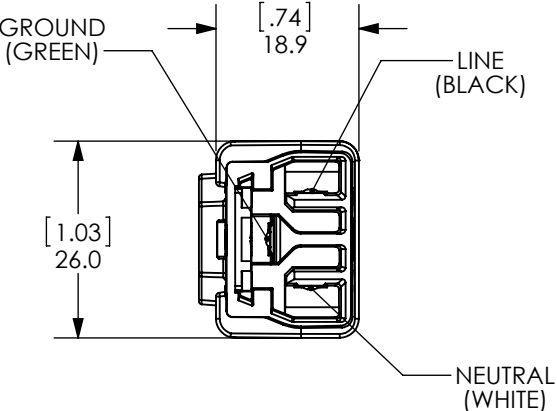


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ANDERSON POWER PRODUCTS. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF ANDERSON POWER PRODUCTS IS PROHIBITED.

Copyright 2015

ANDERSON POWER PRODUCTS RESERVES THE RIGHT TO ALTER PRODUCT TYPES, THEIR TECHNICAL DATA, DIMENSION, STYLE AND ACCESSORIES WITHOUT PRIOR NOTIFICATION.

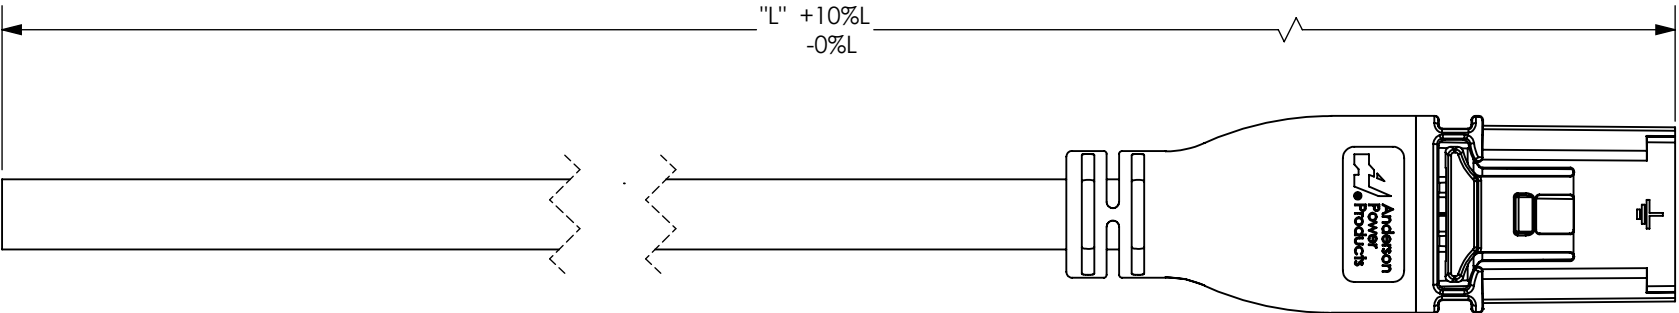


CONNECTOR		CABLE	
TYPE	SAF-D-GRID® 300 VOLT (3-6075P20)	TYPE	UL 62 LISTED SJT TYPE
KEY CONFIGURATION	KEY "B"(SEE NOTE 1)	CONDUCTOR SIZE / QTY.	14 / 3
APPROVAL	cURus TO UL 1977, FILE# E26226	STRANDING	41 X 30AWG
CONTACTS	COPPER ALLOY, SILVER PLATED	FLAMMABILITY / TEMP.	VW-1 / 90°C
INNER MOLD HOUSING	POLYCARBONATE, BLACK. UL 94 V-0	VOLTAGE RATING	300V AC/DC
OVERMOLD	PVC, BLACK. UL 94 V-2	JACKET	PVC, NOMINAL O.D. 9.3 [.37]
		JACKET COLOR	BLACK
OVERALL RATINGS AND SPECIFICATIONS			
VOLTAGE		300V AC/DC	
CURRENT		18A	
MAXIMUM OPERATING TEMPERATURE		80°C	
CERTIFICATION		INSPECTION	
cURus TO UL 817, FILE # E343569		HI POT WIRE TO WIRE 2.5 kV / 3 SEC.	
REACH COMPLIANT		POLARITY TESTED100%	
RoHS COMPLIANT		CONTINUITY TESTED100%	
		ELECTRICAL TESTING100%	
		VISUAL INSPECTION 100%	

NOTES:
1) ONLY MATES WITH KEY "B" RECEPTACLES.

PRODUCT NUMBERING AND LENGTHS		
PART NUMBER	LENGTH "L"	
	M	FT
2352-1200-10	1.00	3.28
2352-1200-20	2.00	6.56
2352-1200-30	3.00	9.84
2352-1200-60	6.00	19.68

1	ECN 2016-0031 PART NUMBER RECONFIGURE	AHR	5/23/2016
REV.	DESCRIPTION	APPRV	DATE
REVISIONS			

DIMENSIONS ARE IN:		MM [INCH]		APPROVALS		 ANDERSON POWER PRODUCTS	
UNLESS OTHERWISE STATED				DRAWN		TITLE SAF-D-GRID® SINGLE ENDED POWER CORD, 14 AWG 2352-1200 SERIES	
TOLERANCES:				TWE	10/20/2015		
DECIMALS (INCH)	DECIMALS (MM)	ANGLES		CHECKED			
.XX ± .02	.X ± .5	±2°		AHR	10/23/2015		
SURFACE FINISH:				MKTG APPRV			
MACHINED		3.2µ [128µin] ✓		RJL	10/26/2015	SIZE B	
MOLDED		1.6µ [64µin] ✓		QC APPRV			
MATERIAL: SEE TABLE				UFN	10/26/2015	REV. 1	
FINISH: N/A				ENG APPRV			
				CLY	10/26/2015	CADFILE 04663	
				-CAD GENERATED DRAWING- DO NOT MANUALLY UPDATE DO NOT SCALE			