


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/12/18	

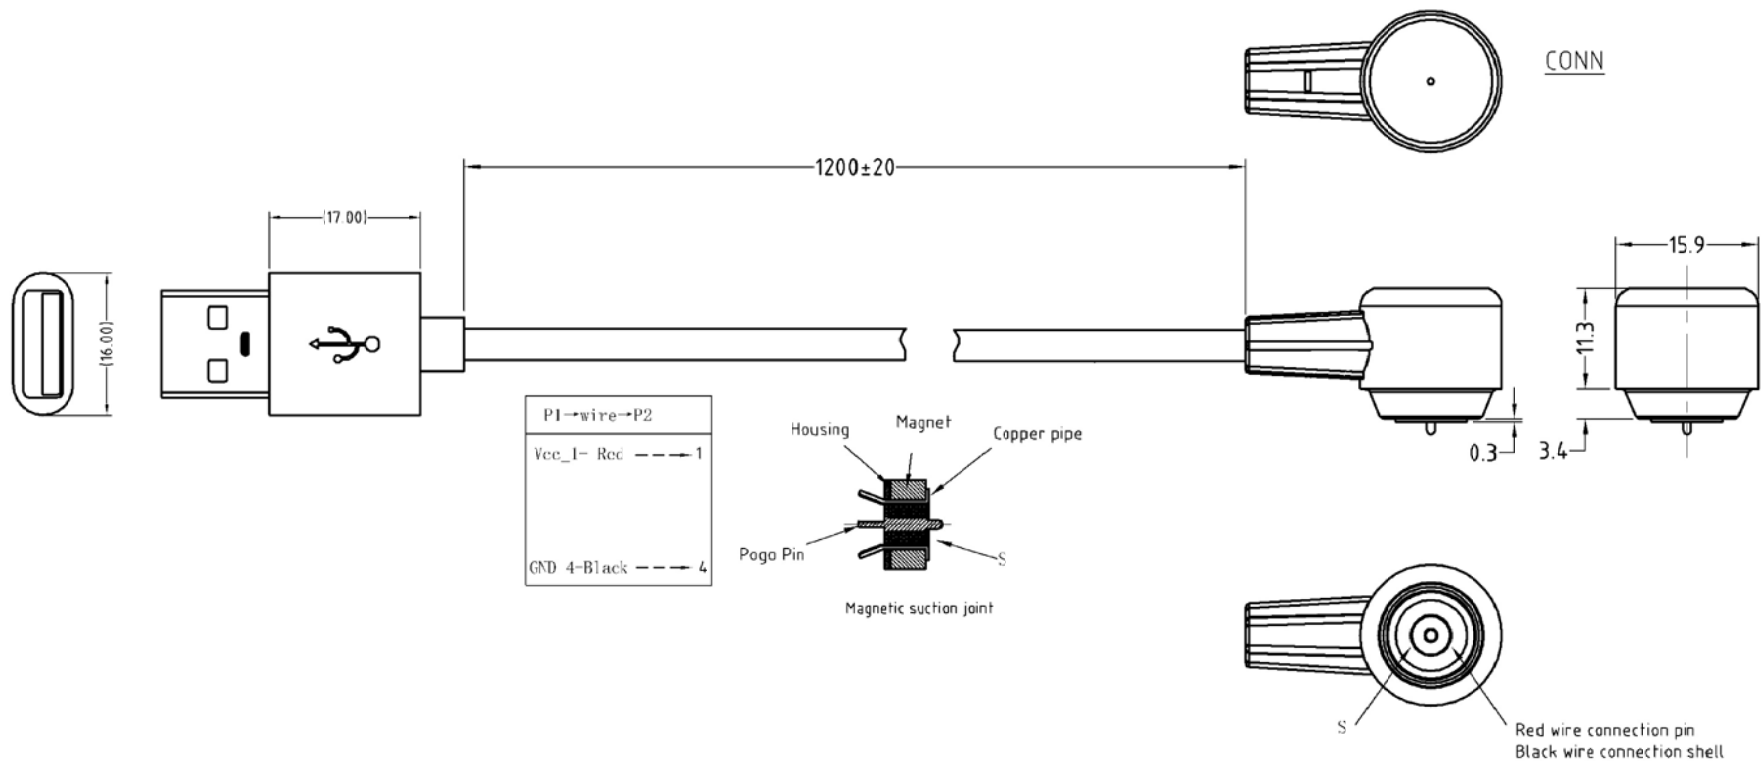

SPECIFICATIONS:

Connector:

P1 = USB Type-A Male, Insulator Color: White, Contact: Gold flash plated
 Overmold Color: White, 45P PVC, Salt spray test: 48H

P2 = Circular POGO Pin connector Male, Right angle, Overmold Color: White, 45P PVC

Cable:

20AWG, 2C, O.D: .157" [4mm], Jacket Color: White, PVC 55P

Electrical:

Rated Current & Voltage: 52VDC, 3A max

Contact resistance: 50 mohms max

Electrical Test:

All Assemblies must be 100% Tested for
 Shorts, Open, Continuity, and Physical Appearance.

Environmental:

Lead free, RoHS compliant.



Mating with: PHR-C4777-02A-FVP-800

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS TOLERANCES: EXCEPT AS NOTED MillimetersANGLE 0~6 ± 0.10 6~30 ± 0.20 30~150 ± 0.30 ±2°		ADAM TECH INTERCONNECTS 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
		TITLE	
		POGO PIN CHARGING CABLE, MALE, R/A, WHT	
		SIZEPART NO.REV.	
XCA-RA2-PHR-34113-M-WT-			
REF: S00170CSCALE: NTS			
SHEET 1 OF 1			