REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-931044~1047	2009/01/14	Prune	Update the drawing.

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

ALTW
DCC. DEPT.
CONFIDENTIAL
2009.03.31
ISSUED

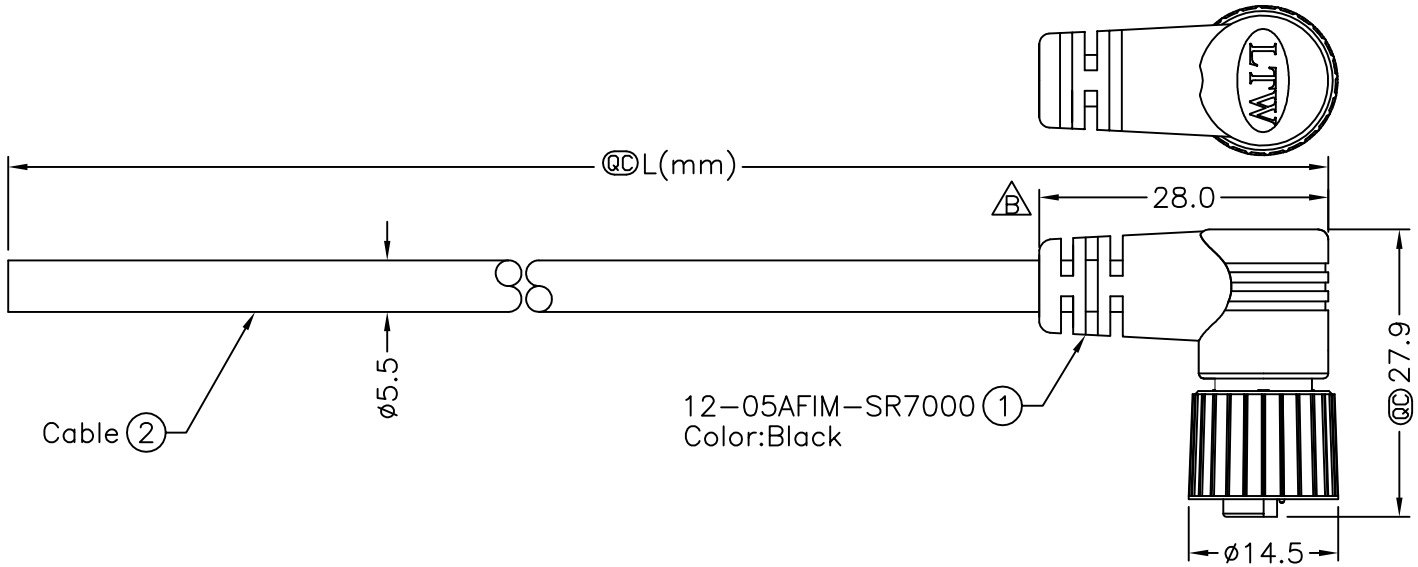



Conn.

ALTW
CONFIDENTIAL
2009.01.14
R&D DEPT.

12-05AFIM-SR7AXX

XX:01~99Meters
01:01Meter
02:02Meters
:
:
99:99Meters
Cable Length(L):01~99Meters

Notes:
* QC Important Dimension.
* Waterproof Rate:IP67.
* Connector:Black,PU.
* Pin:Copper Alloy,Gold Plated.
* Cable:UL2464 22AWG*5C+Talcum,Black, PVC Jacket,UV Resistant,OD=5.5mm.
B * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm



Pin Assignments
Front View

Conn.	Wire Color	
5	Green	綠
4	Black	黑
3	Blue	藍
2	White	白
1	Brown	棕

Pin Out

UNIT:mm	TITLE B M12 Conn Cable Screw 5P F Conn I Pin	ITEM NO	DRAWN BY Prune / DATE 2009/01/14
TOLERANCE ±0.5 mm	SCALE Free / SHEET 1 OF 1	DWG NO 12-05AFIM-SR7AXX	CHECKED BY Tina / DATE 2009/01/16
	REV. B / SIZE A4 / QC :Inspection Item	CUSTOMER ALTW	APPROVED BY Luke / DATE 2009/03/25

Amphenol LTW
安費諾亮泰企業股份有限公司

FMWI0702-01-01A2