
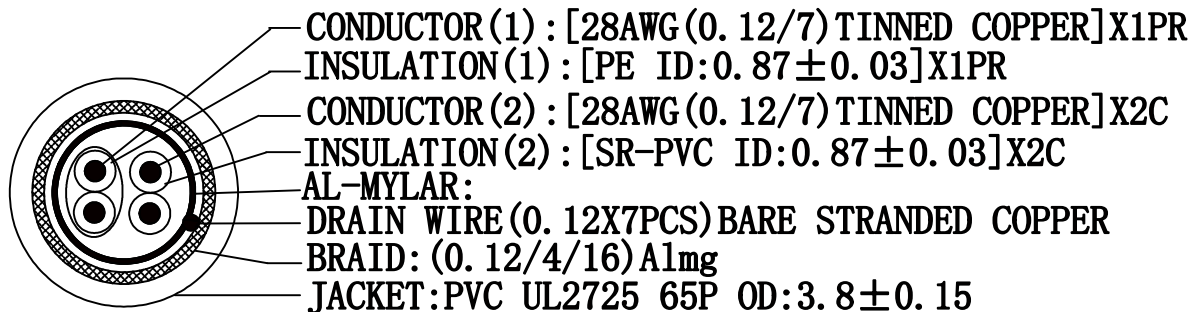



NOTE: ALL MATERIAL COMPLIANT REACH STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description
A/3	19-03-25	B0325A	Modification of Braided
A/4	19-05-14	B0514B	Remarks color
A/5	19-07-22	B0722A	Add twist per inch

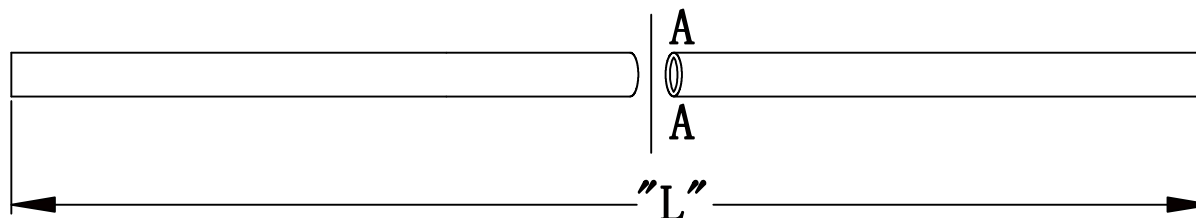

PLASTIC

PAPER


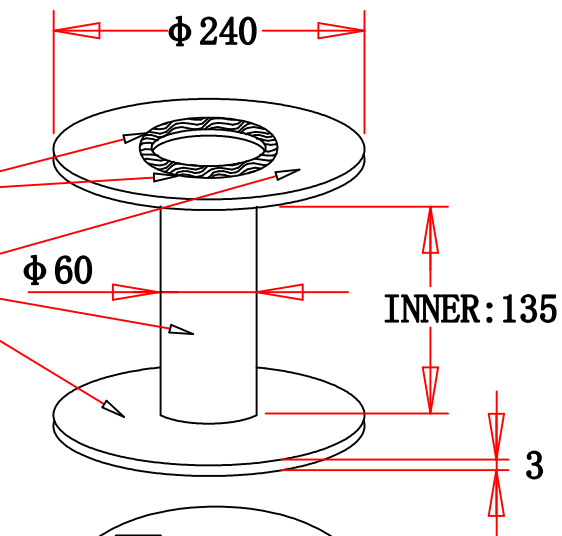


- COLOR: (WHITE, GREEN) X1PR (1PR twist per inch is 15~18MM)
 (RED, BLACK) X2C (1PR+2C twist per inch is 70~80MM)

CABLE WHITE PRINT
 E166160 AWM 2725 80°C 30V
 28AWGX1P+28AWGX2C USB2.0

CnC Tech, LLC
 2725-2828-BL-01000-A
 1 PCS
 RoHS
 1821

P/N label

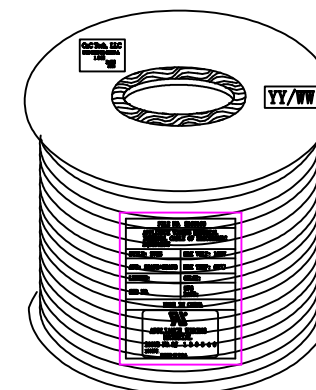

305M/R. "PE" FOAM WRAPPED

Parts number label: 50X25mm stick on the reel

PART NO	WIRE LENGTH L	CABLE COLOR	INTERNAL COLOR CODE
2725-2828-BL-01000-A	305M/R		BLACK

CnC Tech, LLC

Industrial Cable and Connector Technology

DRAWN BY:	DATE: 2019/07/22	DESCRIPTION: 305M/R UL2725 4C CABLE
CHECKED BY:	SHEET 1 of 2	ITEM NO. 2725-2828-BL-01000-A
APPROVED BY:	SCALE 1:1	REV. A/5 UNIT: mm

NOTE: ALL MATERIAL COMPLIANT REACH STANDARD

90	
100	
FILE NO. E166160	
APPLIANCE WIRING MATERIAL INTERNAL CABLE OF ELECTRONIC EQUIPMENT	
STYLE: 2725	MAX VOLT: 30V
AWG: 28AWG+28AWG	MAX TEMP: 80°C
LENGTH:	COLOR:
SER NO.	MFG DATE:
MADE IN CHINA	

UL identification code

28	
44	
UL	
LABLE	

CnC Tech, LLC

Industrial Cable and Connector Technology

DRAWN BY:	DATE: 2019/07/22	DESCRIPTION: 305M/R UL2725 4C CABLE
CHECKED BY:	SHEET 2 of 2	ITEM NO. 2725-2828-BL-01000-A
APPROVED BY:	SCALE 1:1	REV. A/5 UNIT: mm