

Specification Sheet

Part Number: 151-01922


One-piece ratchet closure allows for easy installation during pre- or final assembly.

Easy release feature simplifies quick adjustments and maintenance.

Impact modified, heat and UV stabilized PA66 provides long-term durability, indoors and out.

Stainless steel mounting plate tolerates high torque and provides superior corrosion resistance against chemicals, salt spray and contact with dissimilar metals.

Straight, 180° mounting plate is ideal for applications requiring a flush mount set off from the mounting hole.

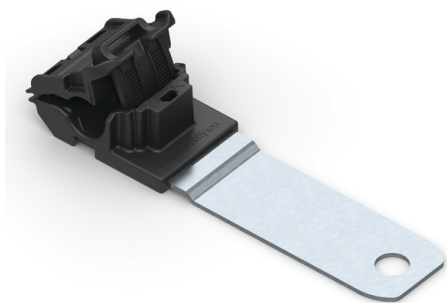

Ratchet P-Clamp, 0.24 - 0.54" Bundle Dia, 180° Long, 0.51" Hole Dia, PA66HIRHSUV/SS304, Black, 200/ctn

| | |
|----------------|--------------|
| Article Number | 151-01922 |
| Type | RCA180LM12SS |
| Color | Black (BK) |
| Quantity Per | box |

| | |
|-------------------------------------|--|
| Product Description | The Ratchet P-Clamp family offers versatility when managing wires, cables and hoses. The robust design and durable materials make it ideal for heavy duty applications, both indoors and out. The one-piece adjustable clamp can be closed by hand to the desired diameter. The release feature provides easy and nondestructive removal of cables simply by using a flat-head screwdriver. This nondestructive release allows the clamp to be reused without removing or replacing any bolts or screws. |
| Short Description | Ratchet P-Clamp, 0.24 - 0.54" Bundle Dia, 180° Long, 0.51" Hole Dia, PA66HIRHSUV/SS304, Black, 200/ctn |
| Global Part Name | RCA180LM12SS-PA66HIRHSUV/SS304-BK |
| Minimum Tensile Strength (Imperial) | 100 |
| Minimum Tensile Strength (Metric) | 445 |
| Length L (Imperial) | 6.58 |
| Length L (Metric) | 167.2 |
| Fixation Method | Screw Mounting |
| Variant | Long |
| Width W (Imperial) | 1.37 |
| Width W (Metric) | 34.9 |
| Bundle Diameter Min (Imperial) | 0.24 |
| Bundle Diameter Min (Metric) | 6.2 |

| | |
|---------------------------------------|--|
| Bundle Diameter Max (Imperial) | 0.54 |
| Bundle Diameter Max (Metric) | 13.7 |
| Cable Tie Width Max (Imperial) | 0.52 |
| Cable Tie Width Max (Metric) | 13.2 |
| Mounting Hole Diameter D (Imperial) | 0.510 |
| Mounting Hole Diameter D (Metric) | 12.95 mm |
| Mounting Hole Diameter D Max (Metric) | 12.95 |
| Stud Diameter (Metric) | M12 |
| Mounting Hole Centers (Imperial) | 3.99 |
| Material | Stainless Steel (SS304) Polyamide 6.6 high impact modified, heat and UV stabilized (PA66HIRHSUV) |
| Material Shortcut | SS304 PA66HIRHSUV |
| Flammability | UL 94 HB |
| Halogen Free | Yes |
| UV Resistant (Yes/No) | Yes |
| Use Conditions | For Indoor and Outdoor Use |

| | |
|------------------------------|-----------------------------------|
| Plenum Rating | AH-2 |
| Operating Temperature | -40°F to +221°F (-40°C to +105°C) |
| Reach Compliant (Article 33) | No |
| ROHS Compliant | Yes |
| UL Listed (US and Canada) | Yes |
| UL Listed (US) | Yes |
| Package Quantity (Imperial) | 200 |
| Package Quantity (Metric) | 200 |
| Customs Number | 3926909988 |

7930 N. Faulkner Road, Milwaukee, WI 53224
 Phone: (800) 537-1512 | Email: corp@htamericas.com

© 2025 HellermannTyton. All Rights Reserved.
[Contact Us](#) [RoHS/WEEE Compliance](#) [Disclaimer](#) [Terms and Conditions](#)