


Specification Sheet

Part Number: 156-00456

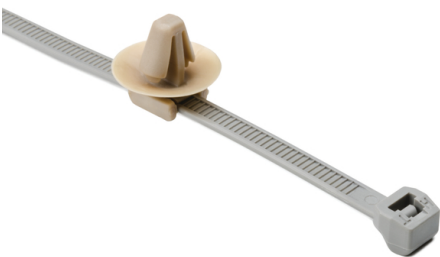

PEEK material provides excellent resistance to extreme temperature environments.

Two piece assembly allows the mount to slide along the strap ensuring proper orientation.

Arrowhead style mount provides low insertion and high extraction force.

Arrowhead disc protects against dirt and other impurities.

2-Piece Cable Tie with Arrowhead Mount, 7.9"L, 0.25 - 0.26" Mounting Hole, PA46/PEEK, Gray/Bge, 100/pkg

Article Number	156-00456
Type	T50ROSP2SFT6.5
Color	Beige (BGE) Gray (GY)
Quantity Per	bag
Product Description	The Arrowhead Mount Tie is a two-piece bundling and fastening solution that delivers strong extraction force. The disc blocks debris ingress through the mounting hole. This convenient combination is used in many markets, including automobile, aircraft and appliance.
Short Description	2-Piece Cable Tie with Arrowhead Mount, 7.9"L, 0.25 - 0.26" Mounting Hole, PA46/PEEK, Gray/Bge, 100/pkg

Global Part Name	T50ROSP2SFT6.5-PA46/PEEK-GY/BGE
------------------	---------------------------------

Minimum Tensile Strength (Imperial)	50
-------------------------------------	----

Minimum Tensile Strength (Metric)	225
-----------------------------------	-----

Length L (Imperial)	7.9
---------------------	-----

Length L (Metric)	200.0
-------------------	-------

Fixation Method	Arrowhead
-----------------	-----------

Identification Plate Position	none
-------------------------------	------

Tie Closure	plastic pawl
-------------	--------------

Variant	Outside Serrated
---------	------------------

Width W (Imperial)	0.18
--------------------	------

Width W (Metric)	4.6
------------------	-----

Bundle Diameter Min (Imperial)	0.04
--------------------------------	------

Bundle Diameter Min (Metric)	1.0
------------------------------	-----

Bundle Diameter Max (Imperial)	1.77
--------------------------------	------

Bundle Diameter Max (Metric)	45.0
------------------------------	------

Thickness T (Imperial)	0.05
------------------------	------

Thickness T (Metric)	1.3
Height H (Imperial)	0.63
Height H (Metric)	16.0
Panel Thickness Min (Imperial)	0.07
Panel Thickness Max (Imperial)	0.09
Panel Thickness Min (Metric)	1.7
Panel Thickness Max (Metric)	2.3
Mounting Hole Diameter D (Imperial)	0.25 - 0.26
Mounting Hole Diameter D (Metric)	6.3 - 6.7 mm
Mounting Hole Diameter D Min (Imperial)	0.25
Mounting Hole Diameter D Max (Imperial)	0.26
Mounting Hole Diameter D Max (Metric)	6.7
Disc Diameter (Metric)	16.0
Disc Diameter (Imperial)	0.63

Material Polyamide 4.6 (PA46) Polyetheretherketone (PEEK)

Foot Part Material	PEEK
Material Shortcut	PEEK PA46
Material Cable Tie	Polyamide 4.6 (PA46)
Flammability	UL 94 V-2
UV Resistant (Yes/No)	No
Use Conditions	For Indoor and Outdoor Use
Operating Temperature	-40°F to +302°F (-40°C to +150°C) -67°F to +464°F (-55°C to +240°C)
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Package Quantity (Imperial)	100
Package Quantity (Metric)	100
Customs Number	3926909988

7930 N. Faulkner Road, Milwaukee, WI 53224
 Phone: (800) 537-1512 | Email: corp@htamericas.com