


## Specification Sheet

Part Number: 157-00119

Offset design allows bundles to sit off of mounting points to avoid friction against surrounding areas.

Fir tree gives 3 to 1 extraction versus insertion force making them strong and easy to install.

Friction tab inside of fir tree allows tie to sit in mount without falling out prior to installation.

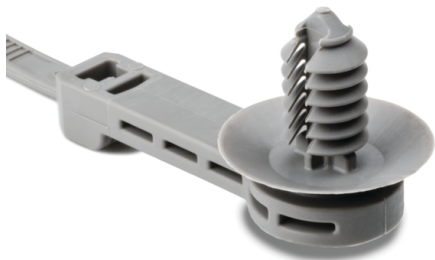

1-Piece Cable Tie with Offset Fir Tree with Disc, 25 mm Offset, 9.1"L, 6.1 - 7.0 mm or 6.35 mm (hexagonal) Hole, PA66HIRHS, Gray, 3000/ctn

Article Number 157-00119

Type T50ROSFT6SO25A

Color Gray (GY)

Quantity Per bag

**Product Description**

Offset cable ties route and position bundles away from a mounting hole. Rigid offset bar eliminates potential bending of wire or cables once installed. Multiple offset distances and fir tree sizes cover the majority of industry offset applications. The tie strap's outside serration design provides a smooth surface to protect soft bundles. HellermannTyton's one-piece mounting ties offer a complete solution by both bundling and mounting. Their ideal combination of high-specification materials and superior design suit the needs of complex applications.

|                                     |                                                                                                                                            |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| Short Description                   | 1-Piece Cable Tie with Offset Fir Tree with Disc, 25 mm Offset, 9.1"L, 6.1 - 7.0 mm or 6.35 mm (hexagonal) Hole, PA66HIRHS, Gray, 3000/ctn |
| Global Part Name                    | T50ROSFT6SO25A-PA66HIRHS-GY                                                                                                                |
| Minimum Tensile Strength (Imperial) | 50                                                                                                                                         |
| Minimum Tensile Strength (Metric)   | 225                                                                                                                                        |
| Length L (Imperial)                 | 9.1                                                                                                                                        |
| Length L (Metric)                   | 230.0                                                                                                                                      |
| Offset Length (Imperial)            | 0.98                                                                                                                                       |
| Offset Length (Metric)              | 25.0                                                                                                                                       |
| Fixation Method                     | Fir tree for round holes                                                                                                                   |
| Identification Plate Position       | none                                                                                                                                       |
| Releasable Closure                  | No                                                                                                                                         |
| Width W (Imperial)                  | 0.20                                                                                                                                       |
| Width W (Metric)                    | 5.1                                                                                                                                        |
| Bundle Diameter Min (Imperial)      | 0.08                                                                                                                                       |
| Bundle Diameter Min (Metric)        | 2.0                                                                                                                                        |

|                                         |                                  |
|-----------------------------------------|----------------------------------|
| Bundle Diameter Max (Imperial)          | 1.97                             |
| Bundle Diameter Max (Metric)            | 50.0                             |
| Height H (Imperial)                     | 0.89                             |
| Height H (Metric)                       | 21.20                            |
| Panel Thickness Min (Imperial)          | 0.02                             |
| Panel Thickness Max (Imperial)          | 0.26                             |
| Panel Thickness Min (Metric)            | 0.6                              |
| Panel Thickness Max (Metric)            | 6.65                             |
| Mounting Hole Diameter D (Imperial)     | 0.24 - 0.28 " 0.25 (hexagonal)   |
| Mounting Hole Diameter D (Metric)       | 6.35 mm (hexagonal) 6.1 - 7.0 mm |
| Mounting Hole Diameter D Min (Imperial) | 0.24                             |
| Mounting Hole Diameter D Max (Imperial) | 0.28                             |
| Mounting Hole Diameter D Max (Metric)   | 7.0                              |
| Disc Diameter (Metric)                  | 19.0                             |
| Disc Diameter (Imperial)                | 0.75                             |

|                              |                                                                  |
|------------------------------|------------------------------------------------------------------|
| Material                     | Polyamide 6.6, high impact modified, heat stabilized (PA66HIRHS) |
| Material Shortcut            | PA66HIRHS                                                        |
| Flammability                 | UL 94 V-2                                                        |
| UV Resistant (Yes/No)        | No                                                               |
| Use Conditions               | For Indoor Use Only                                              |
| Operating Temperature        | -40°F to +230°F (-40°C to +110°C)                                |
| Reach Compliant (Article 33) | Yes                                                              |
| ROHS Compliant               | Yes                                                              |
| Package Quantity (Imperial)  | 3000                                                             |
| Package Quantity (Metric)    | 3000                                                             |
| Customs Number               | 3926909988                                                       |

7930 N. Faulkner Road, Milwaukee, WI 53224  
Phone: (800) 537-1512 | Email: corp@htamericas.com