


Specification Sheet

Part Number: 170-03074

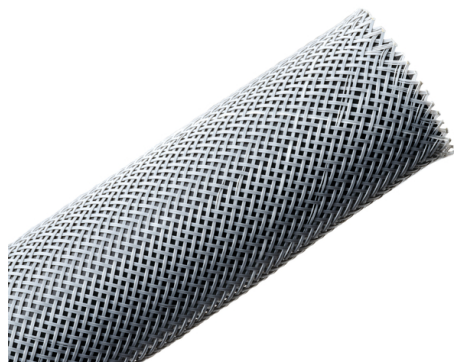

Treated polyester material contains a combustion inhibitor for use in applications where flame retardancy is required.

Braided design allows sleeving to expand by 150% to accommodate variations in wire bundle and eases installation.

Braided Sleeving, Expandable, Flame Retardant, 0.75" Dia, PET, Gray, 75 ft/reel

Article Number	170-03074
----------------	-----------

Type	BSPFR348
------	----------

Color	Gray (GY)
-------	-----------

Quantity Per	reel
--------------	------

Product Description	A flame retardant woven (threaded) polyester sleeving that is resistant to cuts and abrasion, and contains a combustion inhibitor allowing it to achieve a UL and CSA flame resistance rating of VW-1. Contains white tracer thread for easy identification.
---------------------	--

Short Description	Braided Sleeving, Expandable, Flame Retardant, 0.75" Dia, PET, Gray, 75 ft/reel
-------------------	---

Global Part Name	BSPFR348-PET-GY
------------------	-----------------

Length L (Imperial)	75.0
---------------------	------

Length L (Metric)	22.9
-------------------	------

Bundle Diameter Min (Imperial)	0.5
--------------------------------	-----

Bundle Diameter Min (Metric)	12.7
------------------------------	------

Bundle Diameter Max (Imperial)	1.25
--------------------------------	------

Bundle Diameter Max (Metric)	31.8
------------------------------	------

Diameter D (Imperial)	0.75
-----------------------	------

Diameter D (Metric)	19.1
---------------------	------

Nominal Diameter (Imperial)	0.75
-----------------------------	------

Nominal Diameter (Metric)	19.1
---------------------------	------

Material	Polyester (PET)
----------	-----------------

Material Shortcut	PET
-------------------	-----

Flammability	FMVSS 302 FAR 25 Mil-202 UL 224 VW-1
--------------	--------------------------------------

Halogen Free	Yes
--------------	-----

UV Resistant (Yes/No)	No
-----------------------	----

Use Conditions	For Indoor Use Only
Operating Temperature	-94°F to +257°F (-70°C to +125°C)
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Certification/Specification	UL 94 VW-1
UL Recognized (US)	Yes
Package Quantity (Imperial)	75
Package Quantity (Metric)	22.86
Customs Number	5808100000

7930 N. Faulkner Road, Milwaukee, WI 53224
Phone: (800) 537-1512 | Email: corp@htamericas.com

© 2025 HellermannTyton. All Rights Reserved.
[Contact Us](#) [RoHS/WEEE Compliance](#) [Disclaimer](#) [Terms and Conditions](#)