


Specification Sheet

Part Number: 170-20600

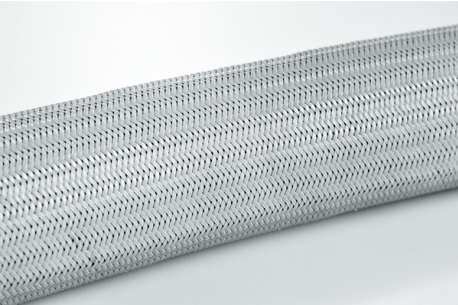

Nylon monofilament construction weave offers a tight braid that provides full coverage but will not rot or retain moisture.

Material performs well in wet applications and where abiding substrate has a smooth surface.

Helagaine Braided Sleeving, 6 mm Dia, PA66,GY, 328ft/Reel

|                     |                                                                                                                                                                            |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Article Number      | 170-20600                                                                                                                                                                  |
| Type                | HEGPA6606                                                                                                                                                                  |
| Color               | Gray (GY)                                                                                                                                                                  |
| Quantity Per        | metre                                                                                                                                                                      |
| Product Description | Helagaine Nylon Polyamide Expandable Braided Sleeving is a pliable yet durable sleeve that protects against cuts, abrasion and excessive wear caused by repetitive motion. |
| Short Description   | Helagaine Braided Sleeving, 6 mm Dia, PA66,GY, 328ft/Reel                                                                                                                  |
| Global Part Name    | HEGPA6606-PA66-GY                                                                                                                                                          |

|                                |                      |
|--------------------------------|----------------------|
| Length L (Imperial)            | 328.0                |
| Length L (Metric)              | 100.0                |
| Bundle Diameter Min (Imperial) | 0.16                 |
| Bundle Diameter Min (Metric)   | 4                    |
| Bundle Diameter Max (Imperial) | 0.31                 |
| Bundle Diameter Max (Metric)   | 8                    |
| Diameter D (Imperial)          | 0.24                 |
| Diameter D (Metric)            | 6.1                  |
| Nominal Diameter (Imperial)    | 0.25                 |
| Nominal Diameter (Metric)      | 6                    |
| Material                       | Polyamide 6.6 (PA66) |
| Material Shortcut              | PA66                 |
| Flammability                   | FMVSS 302 UL 94 V-2  |
| Halogen Free                   | Yes                  |
| UV Resistant (Yes/No)          | No                   |

|                              |                                   |
|------------------------------|-----------------------------------|
| Use Conditions               | For Indoor Use Only               |
| Operating Temperature        | -76°F to +302°F (-60°C to +150°C) |
| Reach Compliant (Article 33) | Yes                               |
| ROHS Compliant               | Yes                               |
| Package Quantity (Imperial)  | 328                               |
| Package Quantity (Metric)    | 100                               |
| Customs Number               | 5808100000                        |

7930 N. Faulkner Road, Milwaukee, WI 53224  
 Phone: (800) 537-1512 | Email: corp@htamericas.com