

Specification Sheet


Part Number: TSR1W-33

Tamper resistant, self-locking hidden positive latch permits quick re-entry as well as providing a secure installation of premise wire.

Fittings incorporate a minimum 1" bend radius per ANSI/TIA-568-C and 569-A standards.

Rubber-based, foam-tape adhesive with high ultimate bond strength conforms to any surface.

Flexible hinge allows the raceway to endure numerous openings without creating discoloration or stress cracking

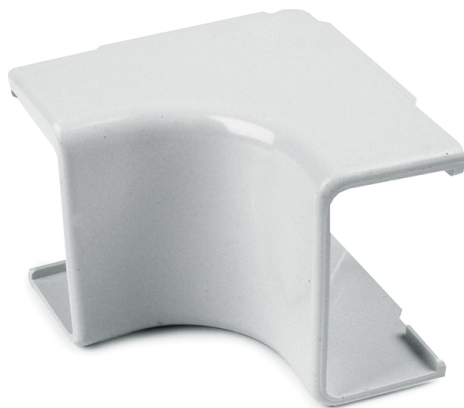

Internal Corner Cover, 3/4", 1" Bend Radius, PVC, White, 1/bg

Article Number	250-01336
----------------	-----------

Type	TSR1-33
------	---------

Color	White (WH)
-------	------------

Quantity Per	bag
--------------	-----

Product Description	HellermannTyton's low voltage raceway (TSR) is a one piece, non-metallic, adhesive backed, latching raceway designed to aesthetically organize and route communications wires, including high speed UTP cable and fiber optic cable, from the telecom room to the work area.
---------------------	--

Short Description	Internal Corner Cover, 3/4", 1" Bend Radius, PVC, White, 1/bg
Global Part Name	TSR1-33-PVC-WH
Width W (Imperial)	0.75
Material	Polyvinylchloride (PVC)
Material Shortcut	PVC
Flammability	UL 94 V-0
Halogen Free	No
UV Resistant (Yes/No)	No
Use Conditions	For Indoor Use Only
Operating Temperature	+122°F (+50°C)
Reach Compliant (Article 33)	No
ROHS Compliant	Yes
Package Quantity (Imperial)	1
Package Quantity (Metric)	1

Customs Number

3925900000

7930 N. Faulkner Road, Milwaukee, WI 53224

Phone: (800) 537-1512 | Email: corp@htamericas.com

© 2025 HellermannTyton. All Rights Reserved.

[Contact Us](#) [RoHS/WEEE Compliance](#) [Disclaimer](#) [Terms and Conditions](#)